


NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	10.26.02

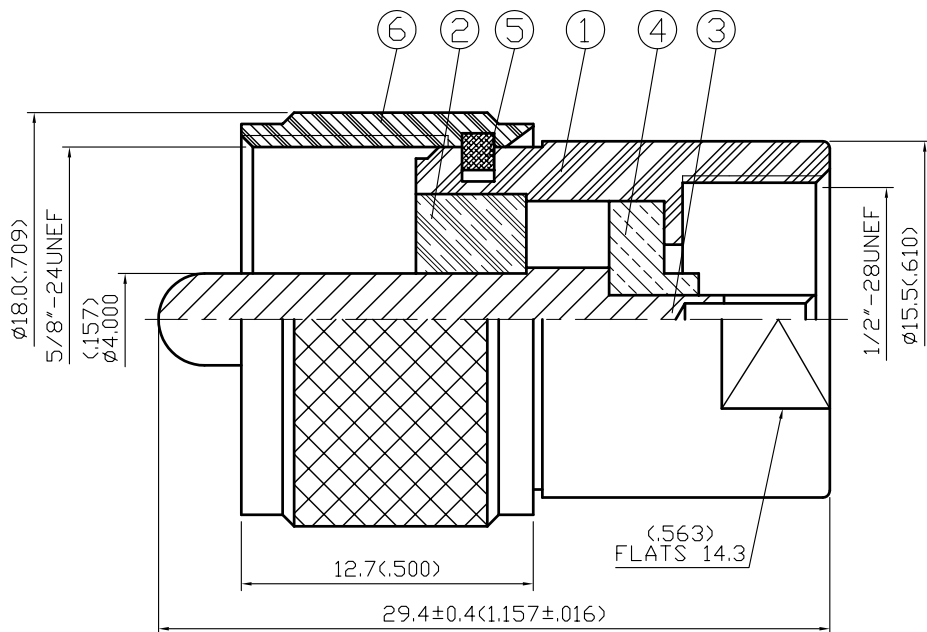


NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. PART TO BE CLEAN AND FREE OF BURRS

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
6	SHELL	BRASS	1	NICKEL 100 $\mu$ " MIN.
5	WASHER	BRASS	1	NONE
4	INSULATION	TEFLON	1	NONE
3	CENTER CONTACT	BRASS	1	GOLD
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	NICKEL 100 $\mu$ " MIN.

製圖	DRAWN	TOLERANCE		品名	25-01	日期	DATE	版次	REV.
		.X	$\pm 0.2$	TITLE			05.19.93		A-1
檢圖	CHECK	.XX	$\pm 0.1$	單位	mm(in)	DWG.NO.		25-0001	
		.XXX	$\pm 0.05$	比例	SCALE	佳楠精密電子股份有限公司			
認定	APPROVAL	ANGLE	$\pm 5^\circ$	比例	4:1	CHIN NAN PRECISION ELECTRONICS CO.,LTD.			

NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	10.26.02

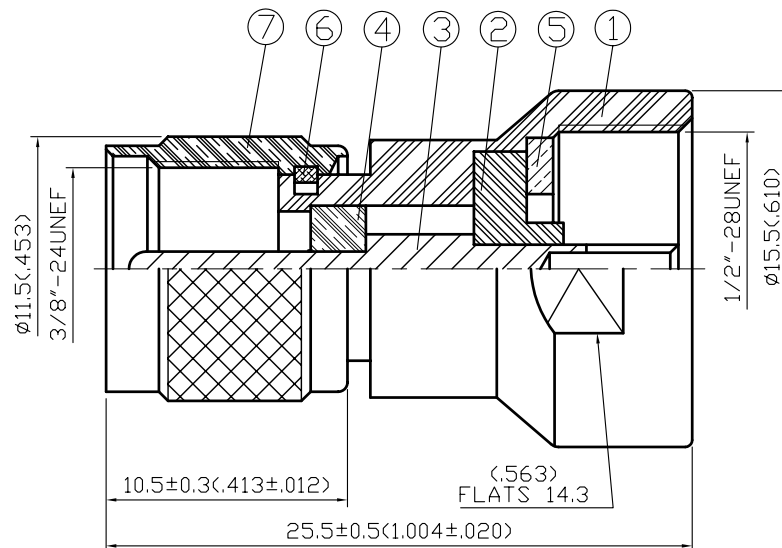


NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. PART TO BE CLEAN AND FREE OF BURRS

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
7	SHELL	BRASS	1	NICKEL 100 $\mu$ " MIN.
6	WASHER	BRASS	1	NONE
5	SLEEVE	BRASS	1	NICKEL 100 $\mu$ " MIN.
4	INSULATION	TEFLON	1	NONE
3	CENTER CONTACT	BRASS	1	GOLD
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	NICKEL 100 $\mu$ " MIN.

製圖	DRAWN	TOLERANCE		品名	25-02	日期	DATE	版次	REV.
		.X	$\pm 0.2$	TITLE			05.20.93		A-1
檢圖	CHECK	.XX	$\pm 0.1$	單位	DWG.NO.	25-0002			
		.XXX	$\pm 0.05$	mm(in)	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.				
認定	APPROVAL	ANGLE	$\pm 5^\circ$	比例					

NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	10.26.02

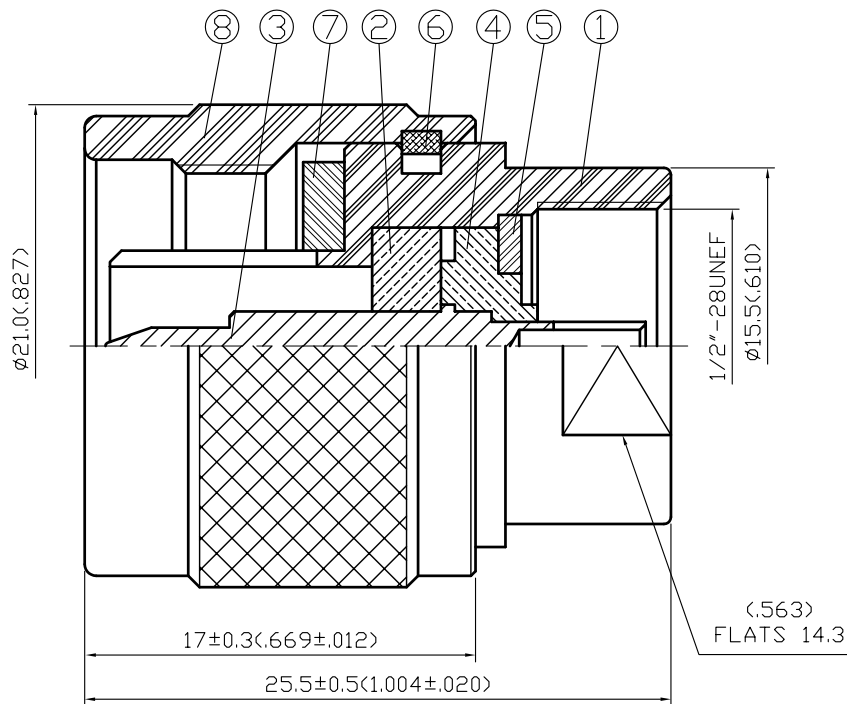


NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
5. PART TO BE CLEAN AND FREE OF BURRS

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
8	SHELL	BRASS	1	NICKEL 100 μ" MIN.
7	GASKET	SILICONE	1	RED
6	WASHER II	BRASS	1	NONE
5	WASHER I	BRASS	1	NICKEL 100 μ" MIN.
4	INSULATION	TEFLON	1	NONE
3	CENTER CONTACT	BRASS	1	GOLD
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	NICKEL 100 μ" MIN.

製圖	DRAWN	TOLERANCE	品名		DATE	版次	REV.
			.X	±0.2			
檢圖	CHECK	TOLERANCE	TITLE		DWG.NO.	SCALE	比例
			.XX	±0.1			
認定	APPROVAL	ANGLE	佳楠精密電子股份有限公司		CHIN NAN PRECISION ELECTRONICS CO.,LTD.		
		±5°					

NO	DESCRIPTION	DATE
⚠	REDUCE SPRING WASHER FROM 2 PCS TO 1 PCS	06.06.97
△	BACKGROUND FORMAT UPDATED	10.26.02

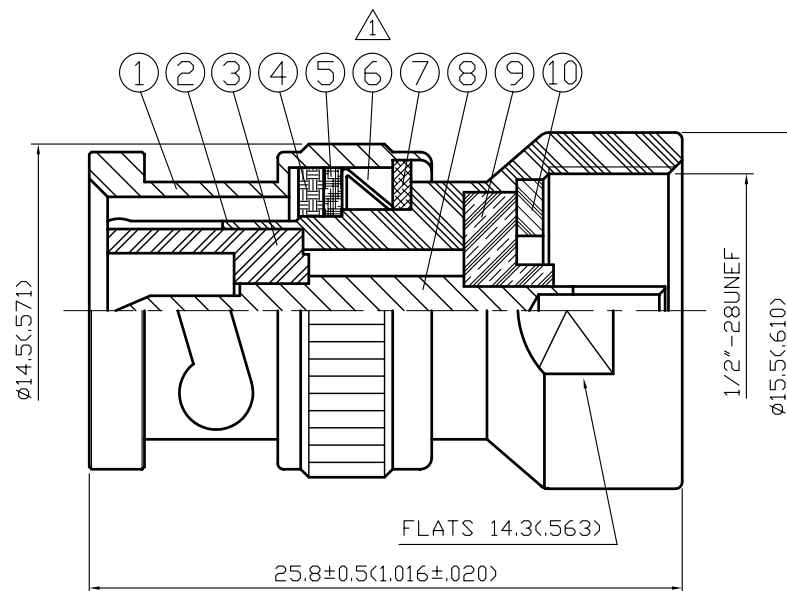

NOTES: UNLESS OTHERWISE SPECIFIED


- BODIES: BRASS PER JIS-C3604
- CENTER CONTACT: BRASS PER JIS-C3604
- INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
- CONNECTOR INTERFACE PER MIL-STD-348A
- PART TO BE CLEAN AND FREE OF BURRS

10	WASHER	BRASS	1	NICKEL 100 μ" MIN.
9	INSULATION	TEFLON	1	NONE
8	CENTER CONTACT	BRASS	1	GOLD
7	WASHER	BRASS	1	NICKEL 100 μ" MIN.
6	SPRING WASHER	SK-5	1	NICKEL 100 μ" MIN.
5	WASHER	BRASS	1	NICKEL 100 μ" MIN.
4	GASKET	SILICONE	1	RED
3	INSULATION	TEFLON	1	NONE
2	BODY	BRASS	1	NICKEL 100 μ" MIN.
1	SHELL	BRASS	1	NICKEL 100 μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH



製圖	DRAWN	TOLERANCE		品名	25-04 (50Ω)	DATE	05.14.93	版次	REV.	A-2
		.X	±0.2	TITLE						
檢圖	CHECK	.XX	±0.1	單位	DWG.NO.	25-0004	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.			
		.XXX	±0.05	mm(in)						
認定	APPROVAL	ANGLE	±5°	比例	SCALE 4:1					

NO	DESCRIPTION	DATE
△	BACKGROUND FORMAT UPDATED	10.26.02

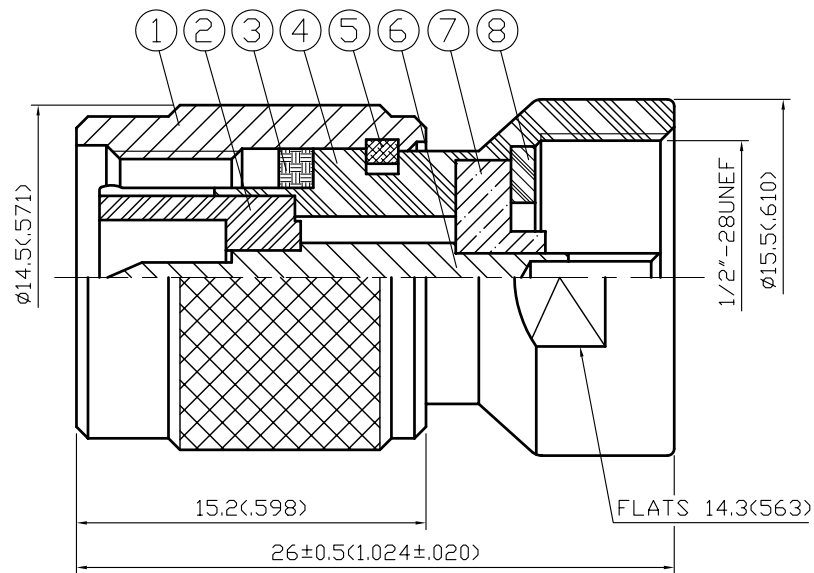


NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
5. PART TO BE CLEAN AND FREE OF BURRS

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
8	WASHER	BRASS	1	NICKEL 100 μ" MIN.
7	INSULATION	TEFLON	1	NONE
6	CENTER CONTACT	BRASS	1	GOLD
5	WASHER	BRASS	1	NONE
4	BODY	BRASS	1	NICKEL 100 μ" MIN.
3	GASKET	RUBBER	1	NONE
2	INSULATION	TEFLON	1	NONE
1	SHELL	BRASS	1	NICKEL 100 μ" MIN.

製圖	DRAWN	TOLERANCE	品名		DATE	版次	REV.
			±0.2	25-05			
檢圖	CHECK	TOLERANCE	TITLE		DWG.NO.	SCALE	比例
			±0.1	25-0005			
認定	APPROVAL	ANGLE	佳楠精密電子股份有限公司		CHIN NAN PRECISION ELECTRONICS CO.,LTD.		
		±5°					

NO	DESCRIPTION	DATE
⚠	USE STAINLESS STEEL INSTEAD OF BRASS	05.15.95
△	BACKGROUND FORMAT UPDATED	10.26.02

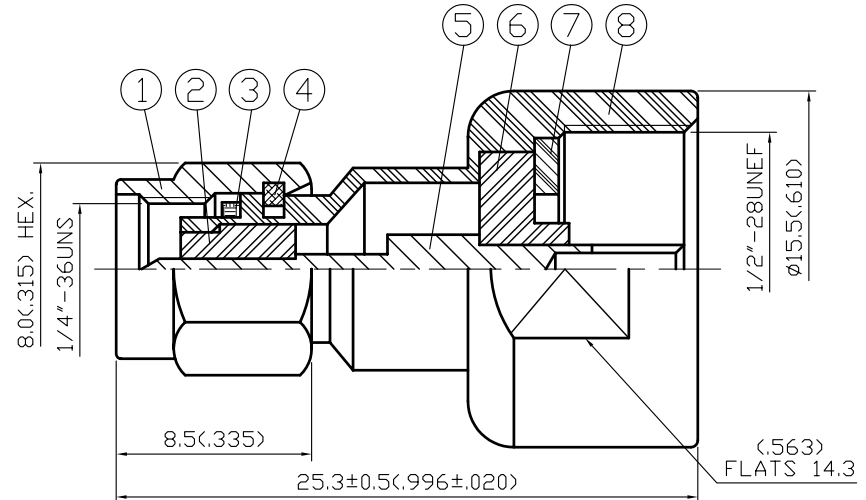

NOTES: UNLESS OTHERWISE SPECIFIED


- BODIES:BRASS PER JIS-C3604
- CENTER CONTACT:BRASS PER JIS-C3604
- INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
- CONNECTOR INTERFACE PER MIL-STD-348A
- PART TO BE CLEAN AND FREE OF BURRS

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
8	BODY	BRASS	1	NICKEL 100μ" MIN.
7	WASHER	BRASS	1	NICKEL 100μ" MIN.
6	INSULATION	TEFLON	1	NONE
5	CENTER CONTACT	BRASS	1	GOLD
4	WASHER	STAINLESS STEEL	1	NONE
3	GASKET	SILICONE	1	NONE
2	INSULATION	TEFLON	1	NONE
1	SHELL	BRASS	1	NICKEL 100μ" MIN.



製圖	DRAWN	TOLERANCE		品名		DATE	REV.
		.X	±0.2	25-06			
檢圖	CHECK	.XX	±0.1	單位	UNIT	DWG.NO. 25-0006	
		.XXX	±0.05	mm(in)	SCALE	4:1	
認定	APPROVAL	ANGLE	±5°	比例	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.		

NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	10.26.02

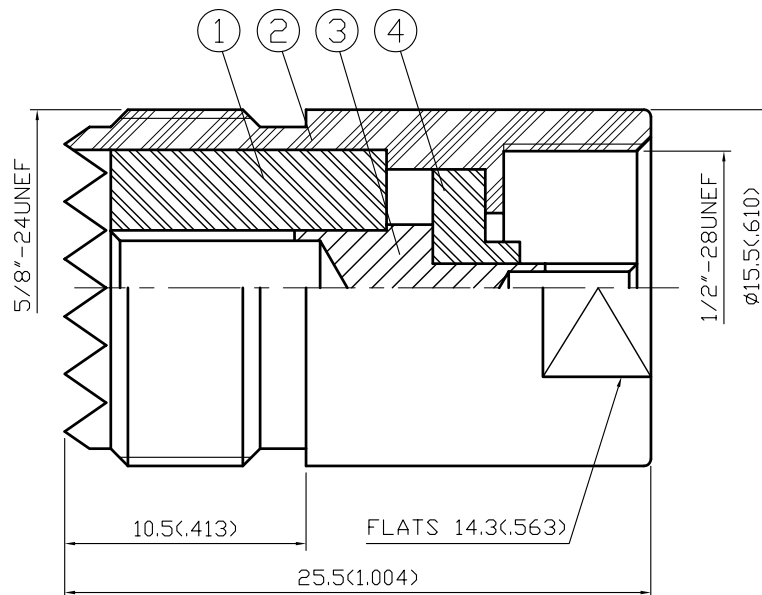


NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. PART TO BE CLEAN AND FREE OF BURRS

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
4	INSULATION	TEFLON	1	NONE
3	CENTER CONTACT	BRASS	1	GOLD
2	BODY	BRASS	1	NICKEL 100 $\mu$ ' MIN.
1	INSULATION	TEFLON	1	NONE

製圖	DRAWN	TOLERANCE		品名	25-07	DATE	05.19.93	版次	REV.
		.X	$\pm 0.2$	TITLE					
檢圖	CHECK	.XX	$\pm 0.1$	單位	mm(in)	DWG.NO. 25-0007			
	APPROVAL	.XXX	$\pm 0.05$	比例	SCALE	佳楠精密電子股份有限公司			
認定		ANGLE	$\pm 5^\circ$		4:1	CHIN NAN PRECISION ELECTRONICS CO.,LTD.			

NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	10.26.02

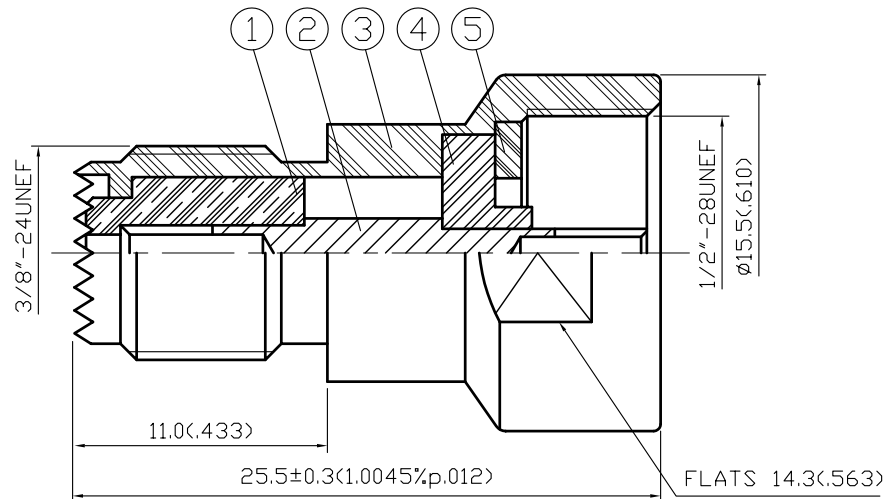

NOTES: UNLESS OTHERWISE SPECIFIED


1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. PART TO BE CLEAN AND FREE OF BURRS

5	WASHER	BRASS	1	NICKEL 100 μ" MIN.
4	INSULATION	TEFLON	1	NONE
3	BODY	BRASS	1	NICKEL 100 μ" MIN.
2	CENTER CONTACT	BRASS	1	GOLD
1	INSULATION	TEFLON	1	NONE
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

製圖	DRAWN	TOLERANCE	品名		25-08	日期	DATE	版次	REV.
			.X	±0.2					
檢圖	CHECK	TOLERANCE	單位		DWG.NO.	25-0008	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.		
			.XX	±0.1					
認定	APPROVAL	TOLERANCE	比例						
			.XXX	±0.05					
		ANGLE	±5°						



NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	10.26.02

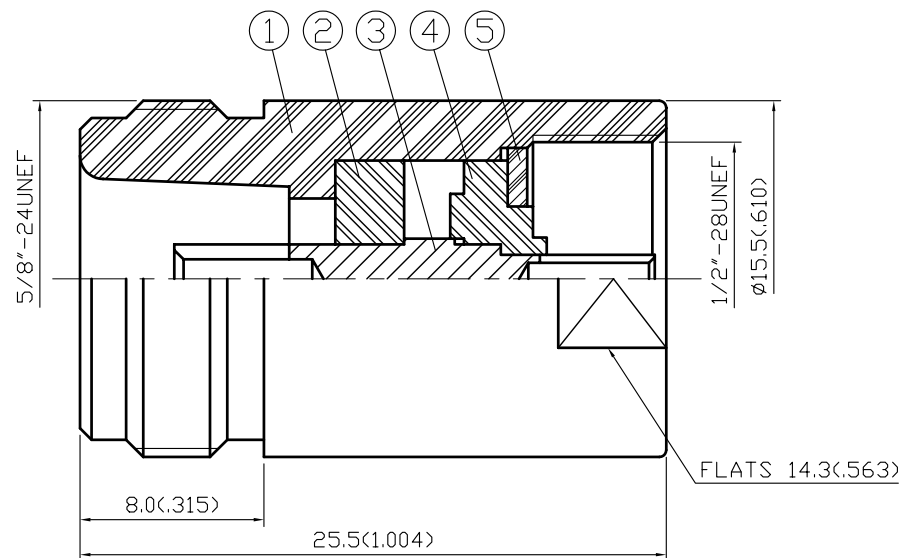


NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
5. PART TO BE CLEAN AND FREE OF BURRS

5	WASHER	BRASS	1	NICKEL 100 μ" MIN.
4	INSULATION	TEFLON	1	NONE
3	CENTER CONTACT	BRASS	1	GOLD
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	NICKEL 100 μ" MIN.
NO	DESCRIPTION	MATERIAL	Q' TY	FINISH

製圖	DRAWN	TOLERANCE	品名	25-09	DATE	版次	REV.
檢圖	CHECK	TOLERANCE	單位	UNIT	DWG.NO.	SCALE	比例
認定	APPROVAL	.XXX	±0.05	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.			
		ANGLE	±5°				


NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	10.26.02

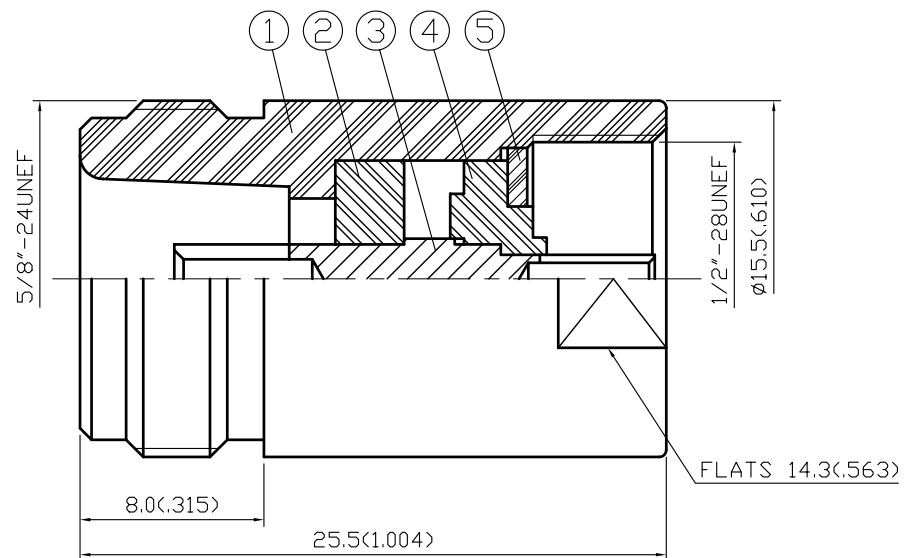


NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
5. PART TO BE CLEAN AND FREE OF BURRS

5	WASHER	BRASS	1	NICKEL 100 $\mu$ " MIN.
4	INSULATION	TEFLON	1	NONE
3	CENTER CONTACT	BRASS	1	GOLD
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	NICKEL 100 $\mu$ " MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

製圖	DRAWN	TOLERANCE	品名	25-09	DATE	版次	REV.
檢圖	CHECK	.XX	±0.1	單位	DWG.NO.	25-0009	SCALE
認定	APPROVAL	ANGLE	±5°	 <b>佳楠精密電子股份有限公司</b> CHIN NAN PRECISION ELECTRONICS CO.,LTD.			

NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	10.26.02

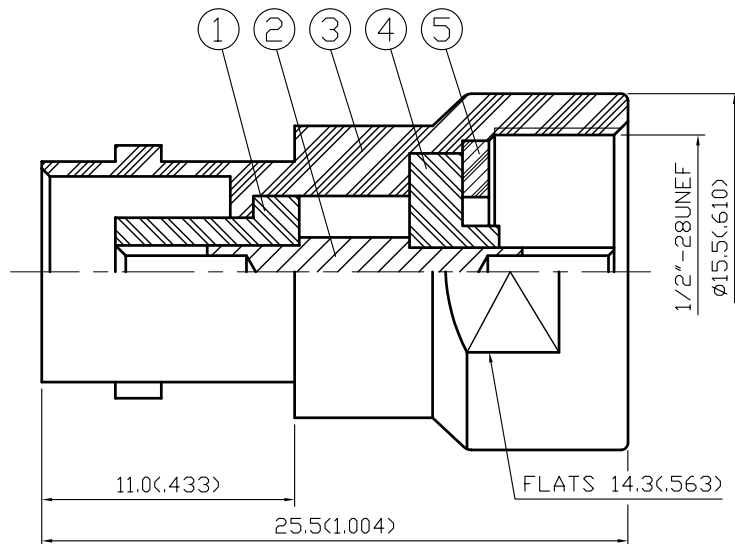


NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
5. PART TO BE CLEAN AND FREE OF BURRS

5	WASHER	BRASS	1	NICKEL 100 μ" MIN.
4	INSULATION	TEFLON	1	NONE
3	BODY	BRASS	1	NICKEL 100 μ" MIN.
2	CENTER CONTACT	BRASS	1	GOLD
1	INSULATION	TEFLON	1	NONE
NO	DESCRIPTION	MATERIAL	Q' TY	FINISH

製圖	DRAWN	TOLERANCE	品名		DATE	版次	REV.
			25-10	05.21.93			
檢圖	CHECK	.X	±0.2	TITLE			
		.XX	±0.1	單位	DWG.NO.	25-0011	
認定	APPROVAL	.XXX	±0.05	比例	佳楠精密電子股份有限公司		
		ANGLE	±5°	SCALE	CHIN NAN PRECISION ELECTRONICS CO.,LTD.		


NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	10.26.02

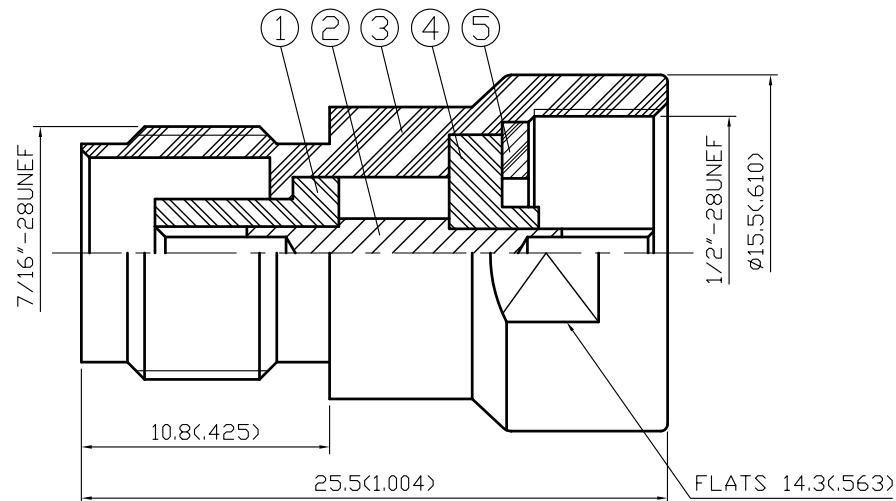


NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
5. PART TO BE CLEAN AND FREE OF BURRS

5	WASHER	BRASS	1	NICKEL 100 μ" MIN.
4	INSULATION	TEFLON	1	NONE
3	BODY	BRASS	1	NICKEL 100 μ" MIN.
2	CENTER CONTACT	BRASS	1	GOLD
1	INSULATION	TEFLON	1	NONE
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

製圖	DRAWN	TOLERANCE	品名		DATE	版次	REV.
			25-11	05.21.93			
檢圖	CHECK	.XX ±0.1	單位	UNIT	DWG.NO.	25-0013	
		.XXX ±0.05	mm(in)	SCALE			
認定	APPROVAL	ANGLE ±5°	比例	4:1	 <b>佳楠精密電子股份有限公司</b> CHIN NAN PRECISION ELECTRONICS CO.,LTD.		

NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	10.26.02

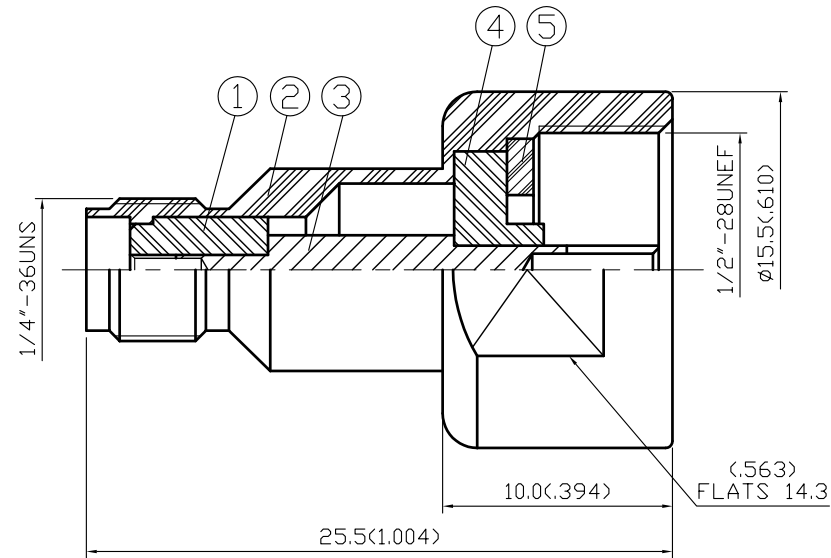


NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BERYLLIUM COPPER PER JIS-C1730B
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
5. PART TO BE CLEAN AND FREE OF BURRS

5	WASHER	BRASS	1	NICKEL 100 $\mu$ " MIN.
4	INSULATION	TEFLON	1	NONE
3	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD
2	BODY	BRASS	1	NICKEL 100 $\mu$ " MIN.
1	INSULATION	TEFLON	1	NONE
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

製圖	DRAWN	TOLERANCE	品名		DATE	版次	REV.
			.X	±0.2			
檢圖	CHECK	TOLERANCE	TITLE		DWG.NO.	SCALE	比例
			.XX	±0.1			
認定	APPROVAL	TOLERANCE	單位		佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.		
			.XXX	±0.05			
		ANGLE	比例				
			4:1				


NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	10.26.02

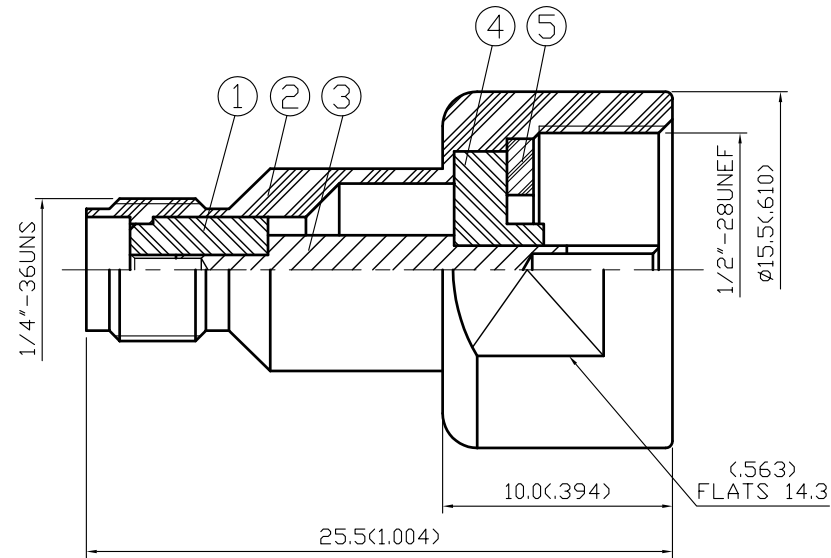


NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BERYLLIUM COPPER PER JIS-C1730B
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
5. PART TO BE CLEAN AND FREE OF BURRS

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
5	WASHER	BRASS	1	NICKEL 100 $\mu$ " MIN.
4	INSULATION	TEFLON	1	NONE
3	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD
2	BODY	BRASS	1	NICKEL 100 $\mu$ " MIN.
1	INSULATION	TEFLON	1	NONE

製圖	DRAWN	TOLERANCE		品名	25-12	DATE	版次	REV.
		.X	±0.2	TITLE				
檢圖	CHECK	.XX	±0.1	單位	DWG.NO.	25-0015		
		.XXX	±0.05	mm(in)	 <b>佳楠精密電子股份有限公司</b> CHIN NAN PRECISION ELECTRONICS CO.,LTD.			
認定	APPROVAL	ANGLE	±5°	比例				


NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	10.28.02

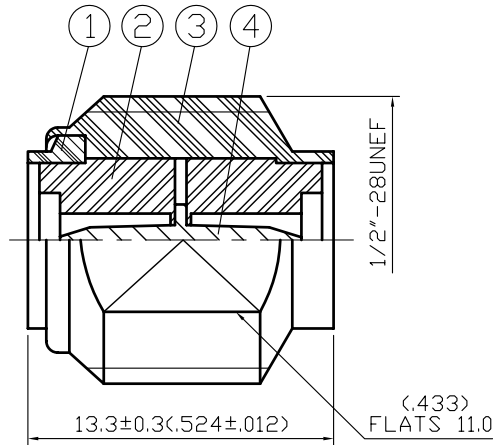

NOTES: UNLESS OTHERWISE SPECIFIED

- BODIES: BRASS PER JIS-C3604
- CENTER CONTACT: BRASS PER JIS-C3604
- INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
- PART TO BE CLEAN AND FREE OF BURRS

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
4	CENTER CONTACT	BRASS	1	GOLD
3	BODY	BRASS	1	NICKEL 100 μ" MIN.
2	INSULATION	TEFLON	1	NONE
1	SLEEVE	BRASS	1	NICKEL 100 μ" MIN.

製圖	DRAWN	TOLERANCE		品名	25-13	DATE	05.24.93	版次	REV.
		.X	±0.2	TITLE					
檢圖	CHECK	.XX	±0.1	單位	mm(in)	DWG.NO. 25-0016			
	APPROVAL	.XXX	±0.05	比例	SCALE 4:1	 佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.			
認定		ANGLE	±5°						