
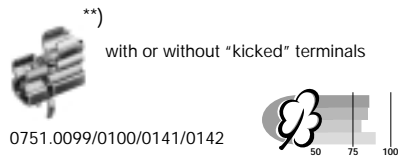


**Fuseholder
open design
Type OG**

through hole mounting



- *) • change in footprint/drilling diagram needed for different fuse-link sizes
- **) • impossible to have two fuse-links inserted at the same time
 - spec. clip-ends prevent axial fuse-link movement

Technical data


- Rated voltage: 250 V*
- Rated current: 10 A
- Rated power acceptance at ambient air temperature T_a 23 °C: 2,5 W
- Power acceptance at higher T_a : see derating curves
Take note of the information on pages 215–219
- Allowable ambient air temperatures T_a : -40 °C to +85 °C
- Contact resistance: 5 mΩ*
- Clip-Material: bronze or brass, tin-plated

* between 2 clips


Standards

- IEC 60127-6
- EN 60127-6
- UL 512


Approvals, Patents

-  UL 0751.0099/0141 (16 A/500 V¹)
0751.0056 (10 A 500 V¹)

¹ Fuse-links according to the standards only for 250 V
0751.0099/0100/0141/0142:
Patents in U.S. (No. 4,606,590) and in further countries

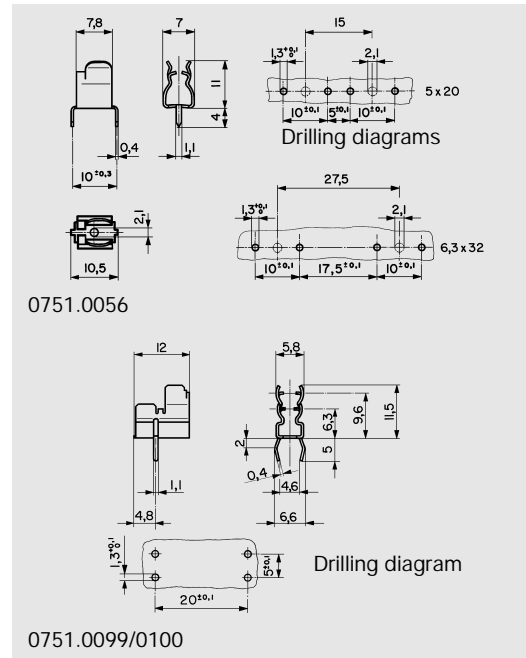

Derating curve

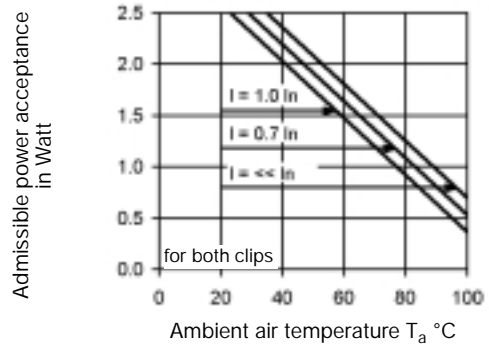

| Order No. | | Terminals |
|-----------|--------------------------|-----------|
| 0751.0099 | Clip, bronze, tin-plated | "kicked" |
| 0751.0100 | Clip, brass, tin-plated | "kicked" |
| 0751.0141 | Clip, bronze, tin-plated | straight |
| 0751.0142 | Clip, brass, tin-plated | straight |
| 0751.0056 | Clip, bronze, tin-plated | straight |