
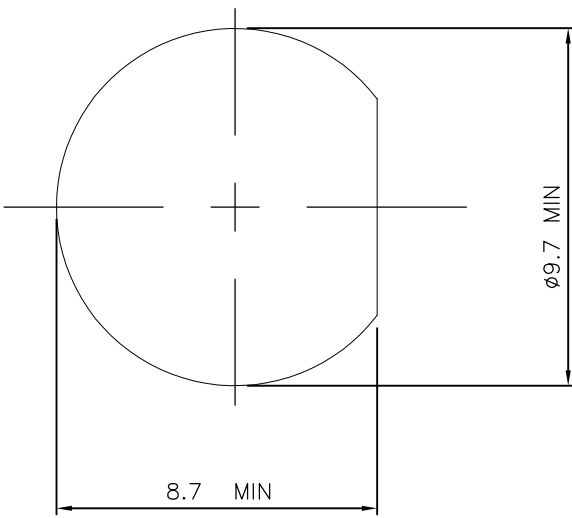


LOC E	DIST B	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	ECR-05-017969	13DEC05	JMS	FWK
			D	ECO-11-010041	16MAY2011	TITAN	MARTIN

NOTES:


- 1 PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3 Au PLATING
- 4 Ni PLATING
- 5 Sn PLATING

- 6 ELECTRICAL CHARACTERISTICS
FREQUENCY RANGE: DC - 4 GHz
NOMINAL IMPEDANCE: 50 Ohms
INSULATION RESISTANCE: 5000 MOhms Min.
WORKING VOLTAGE: 500 Volts RMS at Sea Level
DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
CONTACT RESISTANCE:
CENTRE CONTACT: 1.50 mOhms Max
OUTER CONTACT: 1.0 mOhms Max
VSWR @ xGHz: 1.3 MAX. @1 GHz
INSERTION LOSS xdb: 0.2 dB MAX. @1 GHz
- 7 MECHANICAL CHARATERISTICS
INTERFACE IN ACCORDANCE WITH: MIL-STD-348A
DURABILITY: 500 MATINGS
- 8 ENVIRONMENTAL CHARACTERISTICS
OPERATING TEMPERATURE: -40 to +60 DegC

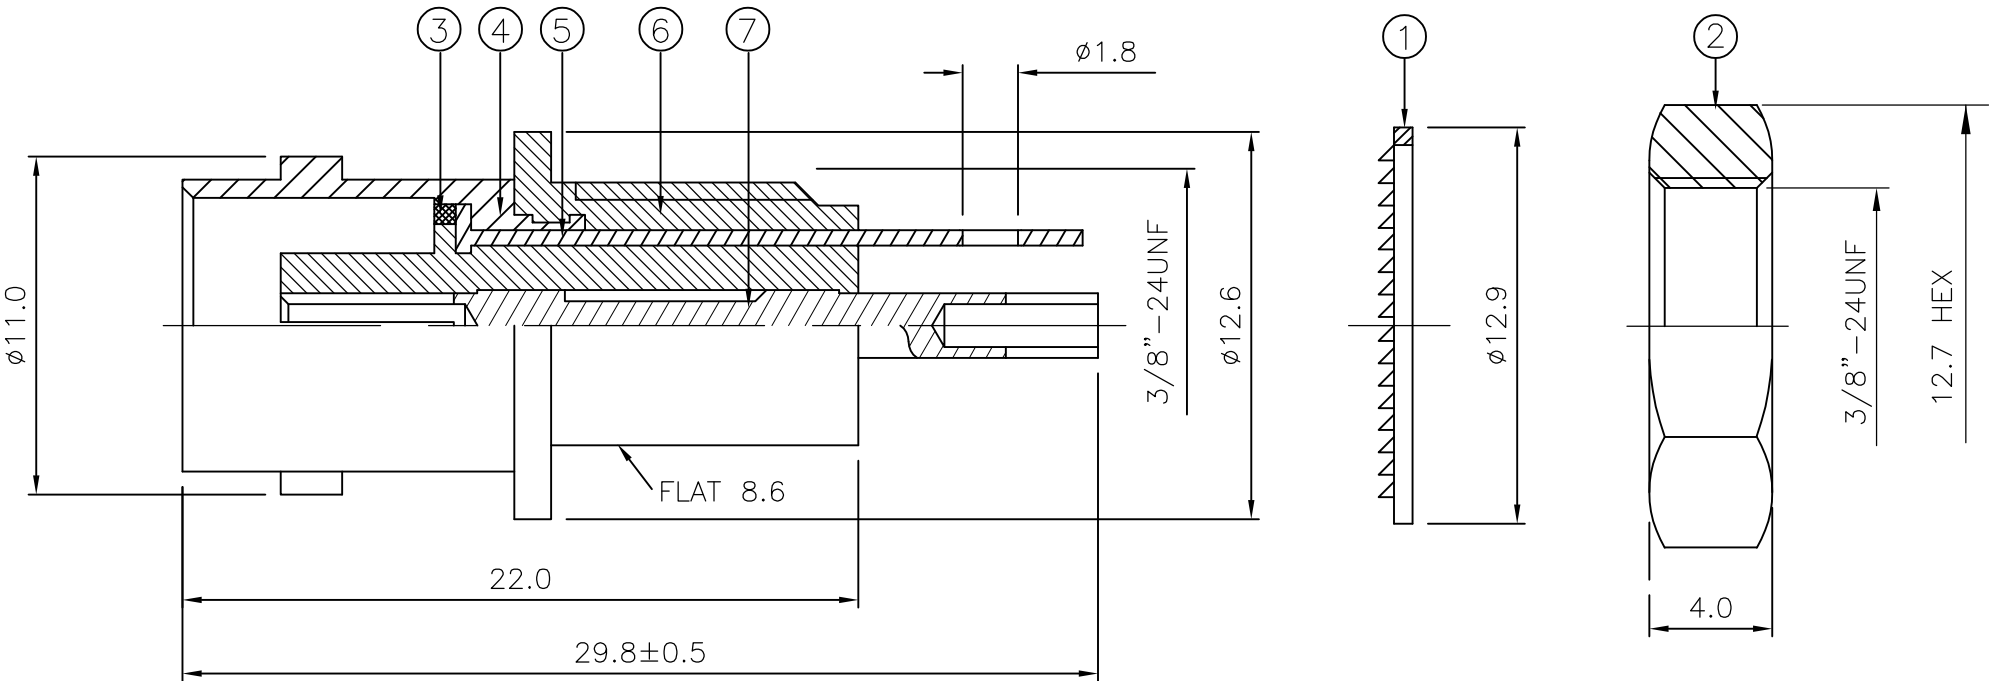

MOUNTING HOLE

		1	1	BRASS	3	CENTER CONTACT	7
		1	1	ABS		BODY I	6
		1	1	BRASS	5	GROUNDING TAB	5
		1	1	BRASS	4	BODY II	4
		1	1	BRASS	4	WASHER	3
		1	1	BRASS	4	NUT	2
		1	1	STEEL	4	WASHER	1
		6--0	1--0	MATERIAL		DESCRIPTION	ITEM
		1	1				
QUANTITY PER ASSY				PARTS LIST			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SANDWELL 13DEC05		TE Connectivity					
		CHK S.PARLOW 13DEC05							
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± – 1 PLC ± 0.2 2 PLC ± 0.1 3 PLC ± 0.05 4 PLC ± – ANGLES ± 5°		NAME BNC INSULATED BULKHEAD SOCKET FRONT MOUNT 50 OHM –					
				APVD F.WHEELER-KING 13DEC05		RESTRICTED TO –			
				PRODUCT SPEC –					
				APPLICATION SPEC –					
				WEIGHT –					
MATERIAL SEE TABLE		FINISH SEE TABLE		SIZE A3		CAGE CODE 00779		DRAWING NO C-1337452	
CUSTOMER DRAWING				SCALE NTS		SHEET 1 OF 1		REV D	