

## FEATURES

- Maximum Offset Voltage: 1mV
- Maximum Bias Current: 15nA
- Typical Output Drive: 70mA
- Operates from 1.1V to 40V
- Internal Pull-Up Current
- Output Can Drive Loads Above  $V^+$
- 30 $\mu$ A Supply Current (LT1017)
- 110 $\mu$ A Supply Current (LT1018)

## APPLICATIONS


- Power Supply Monitors
- Relay Driving
- Oscillators

## DESCRIPTION

The LT<sup>®</sup>1017/LT1018 are general purpose micropower comparators. The LT1017 is optimized for lowest operating power while the LT1018 operates at higher power and higher speed. Both devices can operate from a single 1.1V cell up to 40V. The output stage includes a class "B" pull-up current source, eliminating the need for an external resistive pull-up and saving power. The output stage is also designed to allow driving loads connected to a supply more positive than the device, as can comparators with open-collector output stages.


Input specifications are also excellent. On-chip trimming minimizes offset voltage, while high gain and common mode rejection ratio keep other input referred errors low. Common mode voltage range includes ground. Special circuitry prevents false output states even if the input is overdriven.

The LT1017/LT1018 are pin compatible with older dual comparators such as 393 type devices.


 LTC and LT are registered trademarks of Linear Technology Corporation.

## TYPICAL APPLICATION

1.5V Powered Refrigerator Alarm

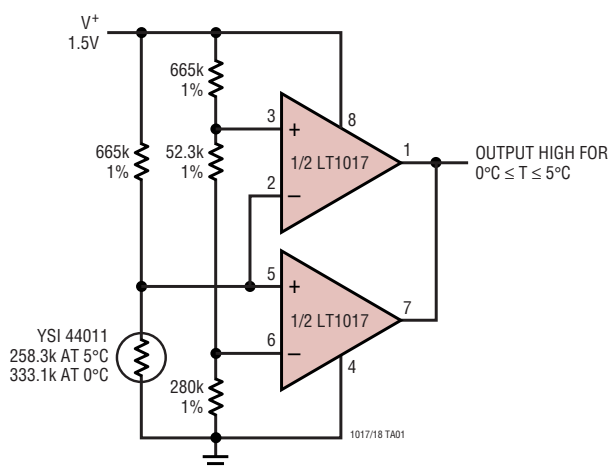

Supply Current

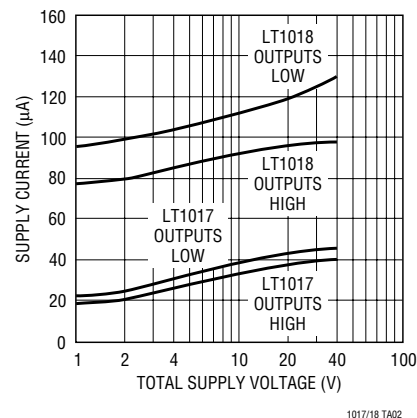

10178fc

# LT1017/LT1018

## ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage .....	40V	Operating Temperature Range	
Differential Input Voltage .....	40V	LT1017M/LT1018M .....	-55°C to 125°C
Input Voltage .....	-0.3V to 40V	LT1017C/LT1018C .....	0°C to 70°C
Short-Circuit Duration .....	Indefinite	LT1017I .....	-40°C to 85°C
Storage Temperature Range .....	-65°C to 150°C	Lead Temperature (Soldering, 10 sec) .....	300°C

## PACKAGE/ORDER INFORMATION

<p>H PACKAGE 8-LEAD TO-5 METAL CAN <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 150^{\circ}\text{C/W}</math>, <math>\theta_{JC} = 45^{\circ}\text{C/W}</math></p> <p><b>OBSOLETE PACKAGE</b> Consider the 8-Lead Plastic Dip Package for Alternate Source</p>	<p>ORDER PART NUMBER</p> <p>LT1017MH LT1017CH LT1018MH LT1018CH</p>	<p>N8 PACKAGE 8-LEAD PDIP <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 130^{\circ}\text{C/W}</math></p>	<p>ORDER PART NUMBER</p> <p>LT1017CN8 LT1017IN8 LT1018CN8</p>
<p>S8 PACKAGE 8-LEAD PLASTIC SO <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 190^{\circ}\text{C/W}</math></p>	<p>ORDER PART NUMBER</p> <p>LT1017CS8 LT1017IS8 LT1018CS8</p> <p>S8 PART MARKING</p> <p>1017 1017I 1018</p>	<p>SW PACKAGE 16-LEAD PLASTIC SO <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 130^{\circ}\text{C/W}</math></p>	<p>ORDER PART NUMBER</p> <p>LT1017CSW LT1018CSW</p>

Consult LTC Marketing for parts specified with wider operating temperature ranges.

## ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the operating temperature range of -55°C to 85°C for M grade parts, -40°C to 85°C for I grade parts and 0°C to 70°C for C grade parts.

PARAMETER	CONDITIONS		LT1017			LT1018			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Offset Voltage (Note 2)	$\pm 0.75\text{V} \leq V_S \leq \pm 20\text{V}$	25°C		0.4	1	0.4	1	mV	
		●		0.5	1.4	0.5	1.4	mV	
		125°C			5	0.7	1.5	mV	
Bias Current	$\pm 0.75\text{V} \leq V_S \leq \pm 20\text{V}$	25°C		5	15	15	75	nA	
		●		7	25	18	100	nA	
		125°C		10	60		110	nA	
Offset Current	$\pm 0.75\text{V} \leq V_S \leq \pm 20\text{V}$	25°C		0.4	2	1	8	nA	
		●		0.5	3	1.6	12	nA	
		125°C			20		20	nA	
Common Mode Rejection Ratio	$V_S = \pm 20\text{V}$ , $-20\text{V} \leq V_{CM} \leq 19.1\text{V}$	25°C	105	115		105	115	dB	
		●	100	115		100	115	dB	
		125°C	82	100		95	110	dB	

10178fc

**ELECTRICAL CHARACTERISTICS** The ● denotes specifications which apply over the operating temperature range of –55°C to 85°C for M grade parts, –40°C to 85°C for I grade parts and 0°C to 70°C for C grade parts.

PARAMETER	CONDITIONS		LT1017			LT1018			UNITS	
			MIN	TYP	MAX	MIN	TYP	MAX		
Power Supply Rejection Ratio	$\pm 0.75V \leq V_S \leq \pm 20V$	25°C	96	110		96	110		dB	
		●	95	105		95	105		dB	
		125°C	82			86	100		dB	
Gain	No Load, $V_{OUT} = \pm 19.9V$ (Note 3)	25°C	110	115		110	125		dB	
		●	105	115		105	120		dB	
		125°C	100			100			dB	
	$R_L = 4k, V_{OUT} = \pm 19V$	25°C	100	110		100	110		dB	
		●	94			94			dB	
		125°C								
Output Sink Current	$V^+ = 4.5V, V^- = 0V$ Overdrive > 30mV	25°C	30	65		35	70		mA	
		●	25	50		25	50		mA	
		125°C	10	20		10	30		mA	
Output Source Current	$V^+ = 40V, V^- = 0V$ $V_{IN} = 5mV, V_{OUT} = 0.4V$	25°C	30	75		75	250		$\mu A$	
		●	25	70		50	220		$\mu A$	
		125°C	25	75		50	200		$\mu A$	
	$V^+ = 1.2V, V^- = 0V$ $V_{IN} = 5mV, V_{OUT} = 0.4V$	25°C	25	35		70	140		$\mu A$	
		●	15	20		45	120		$\mu A$	
		125°C	25	40		40	110		$\mu A$	
Negative Output Saturation	$I_{OUT} = 0mA$ $= 0.1mA$ $= 1mA$ $= 10mA$ $= 30mA$	$V^+ = 4.5V, V^- = 0V$ $V_{IN} = -10mV$	25°C		5	20		5	15	mV
			25°C		35	60		35	60	mV
			25°C		60	120		60	120	mV
			25°C		120	200		120	250	mV
			25°C		350	600		350	700	mV
	$I_{OUT} = 0mA$ $= 0.1mA$ $= 1mA$ $= 10mA$ $= 30mA$	$V^+ = 4.5V, V^- = 0V$ $V_{IN} = -10mV$	●		5	20		8	20	mV
			●		40	75		35	70	mV
			●		75	150		70	150	mV
			●		150	300		150	300	mV
			●		600	900		500	900	mV
	$I_{OUT} = 0mA$ $= 0.1mA$ $= 1mA$ $= 10mA$ $= 30mA$	$V^+ = 4.5V, V^- = 0V$ $V_{IN} = -10mV$	125°C		25	50		10	40	mV
			125°C		60	100		60	100	mV
			125°C		100	200		110	200	mV
			125°C		300	600		300	400	mV
			125°C					900		mV
Positive Output Saturation	$I_{OUT} = 0\mu A$ $= 10\mu A$ $= 0\mu A$ $= 10\mu A$ $= 0\mu A$ $= 10\mu A$	25°C		40	80		35	80	mV	
			●		175	250		175	250	mV
			●		45	90		45	90	mV
			●		190	300		190	300	mV
			125°C		50	100		50	100	mV
			125°C			300			300	mV
Leakage Current	$V_S = 5V, V_{OUT} = 40V$ $V_{IN} \geq 100mV$	25°C		0.5	3		1	8	$\mu A$	
		●		0.6	3		1.8	10	$\mu A$	
Supply Current	$V_S = 5V$	125°C			5			15	$\mu A$	
		●		30	60		110	250	$\mu A$	
Supply Current	$V_S = 5V$	25°C		40	80		110	250	$\mu A$	
		●			80		300		$\mu A$	
	125°C	25°C		40	90		130	250	$\mu A$	
		●		55	100		140	270	$\mu A$	
Minimum Operating Voltage	$I_{OUT} = 1mA$	25°C			1.15			1.2	V	
		●			1.15			1.2	V	
		125°C			1.15			1.2	V	


**Note 1:** Absolute Maximum Ratings are those values beyond which the life of the device may be impaired.

**Note 2:** Offset voltage is guaranteed over a common mode voltage range of  $V^- \leq V_{IN} \leq (V^+ - 0.9V)$ .

**Note 3:** No load gain is guaranteed but not tested (LT1017 only).


## TYPICAL PERFORMANCE CHARACTERISTICS

**Input Bias Current**

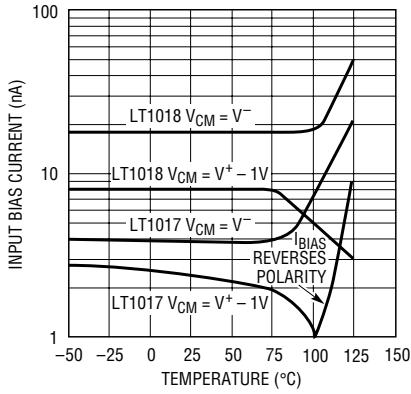


1017/18 G01

**Input Offset Current**

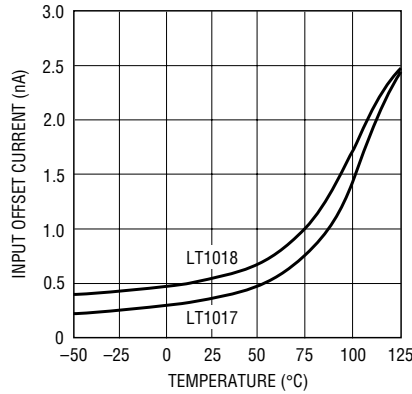


1017/18 G02

**Bias Current vs Differential Input**

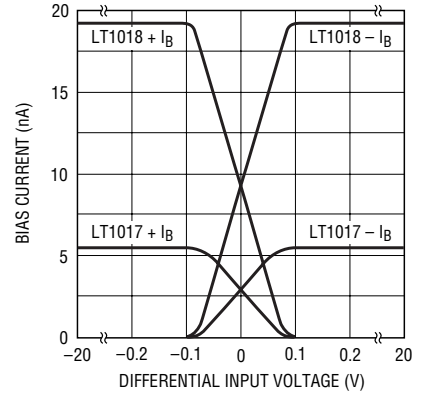


1017/18 G03

**Input Bias Current with Inputs Driven Below the Supply**

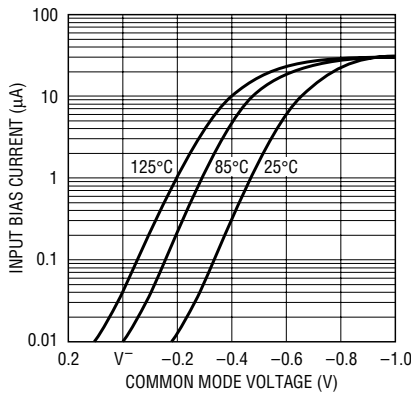


1017/18 G04

**Common Mode Limits**

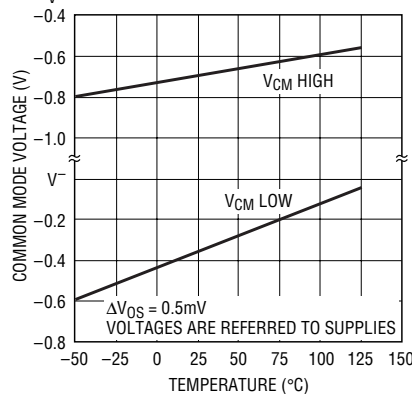


1017/18 G05

**Supply Current**

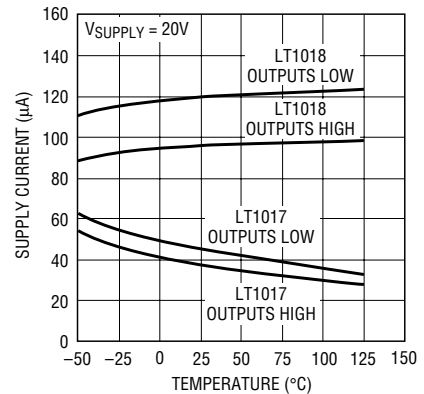


1017/18 G06

**Positive Supply Current**

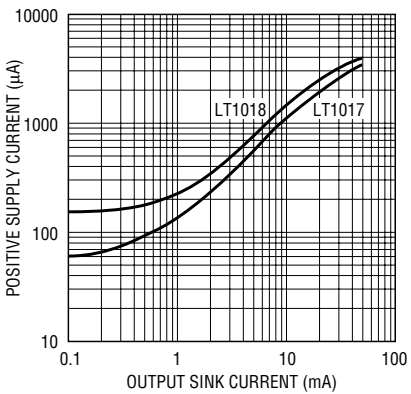


1017/18 G07

**NPN Output Saturation Voltage**

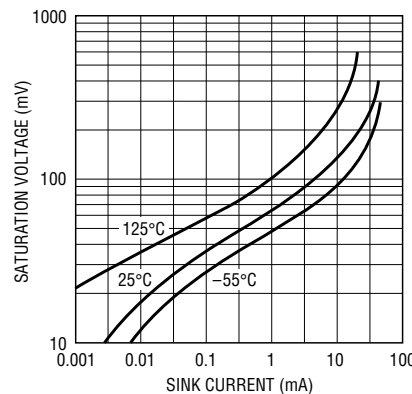

1017/18 G08


**Output Sinking Current Limit**

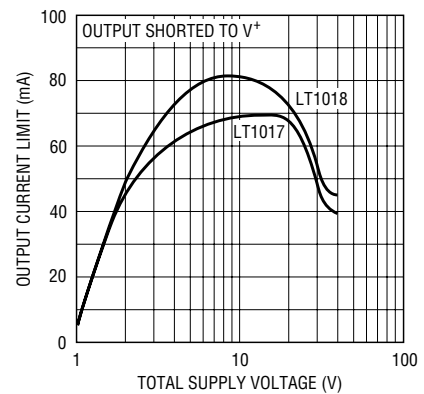


1017/18 G09

# TYPICAL PERFORMANCE CHARACTERISTICS


**Output Sinking Current Limit**

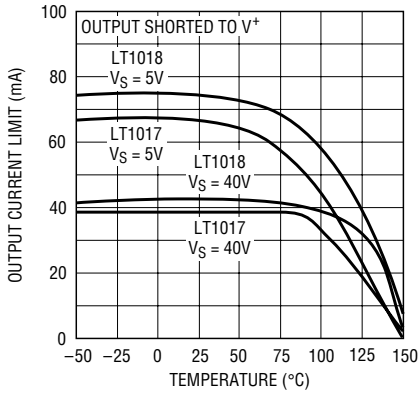


**Total Switching Time**

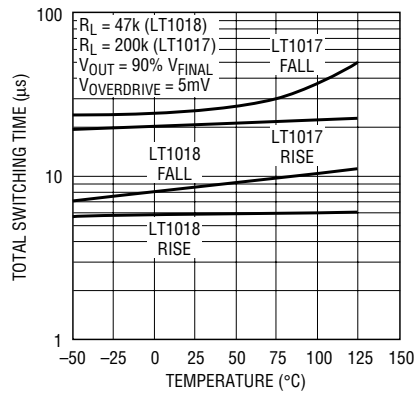


**Output Delay**

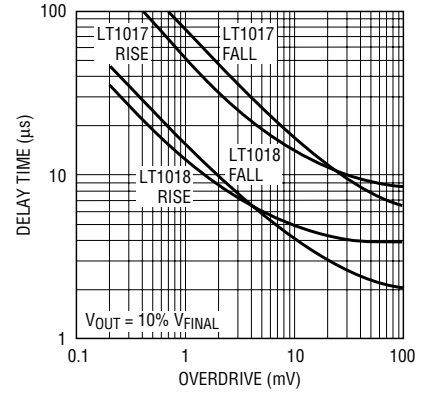


**Transition Time**

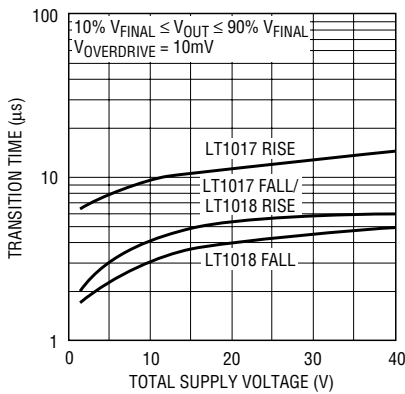


**Positive Transition Time**

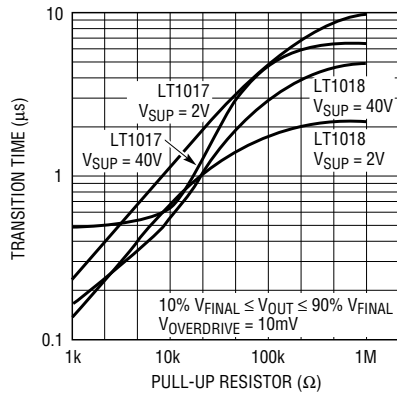


**LT1017 Response Time**

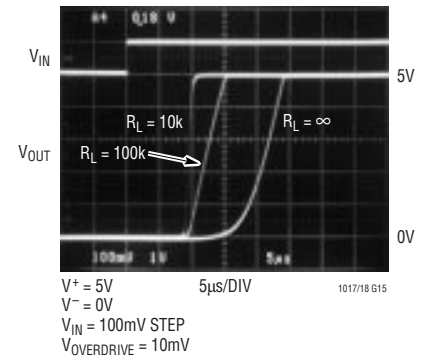


**LT1017 Response Time**

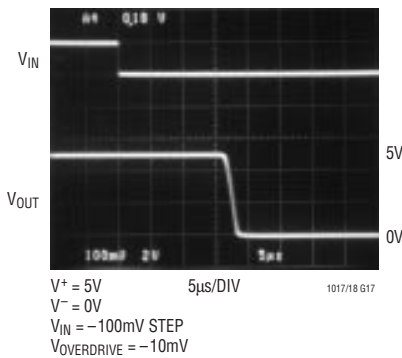

**LT1018 Response Time**

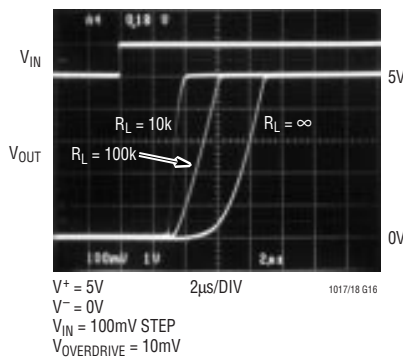


**LT1018 Response Time**

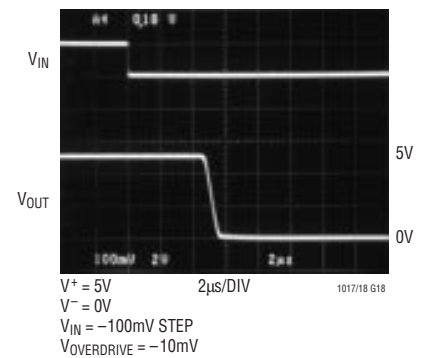


## TYPICAL APPLICATIONS


### Driving Relays




### Increasing Positive Output Current

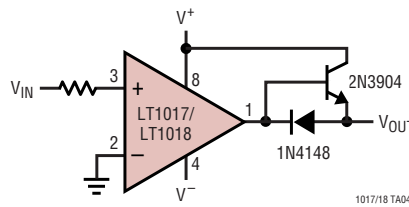


### Delay On Power Up




### LT1018 Op Amp, $A_V = 100$

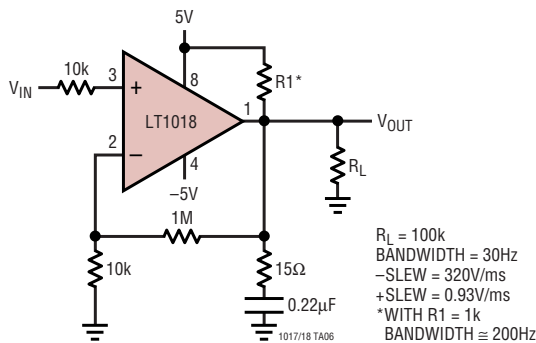


### LT1017 Op Amp, $A_V = 100$

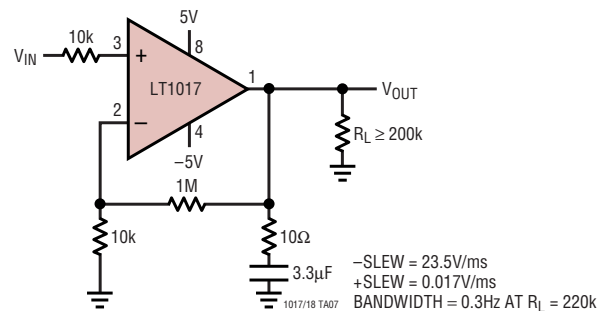

### Negative Voltage Regulator

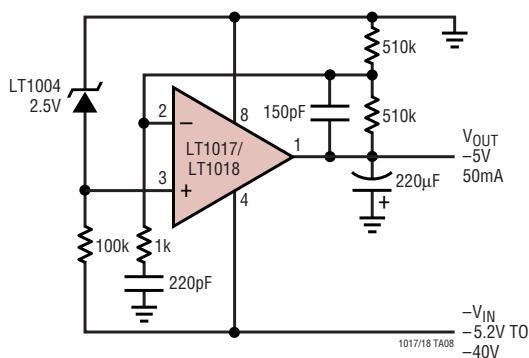


### 2-Wire Comparator

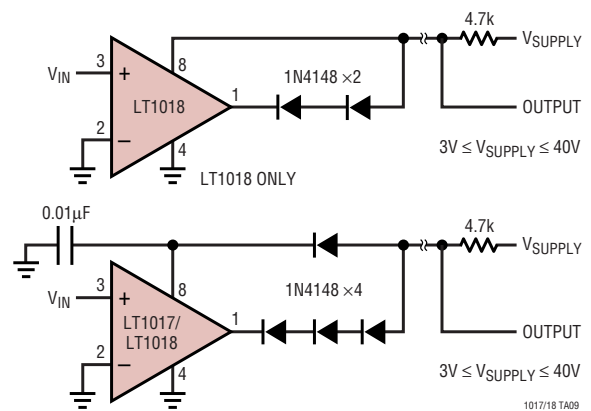


**TYPICAL APPLICATIONS**

**5V Power Supply Monitor**

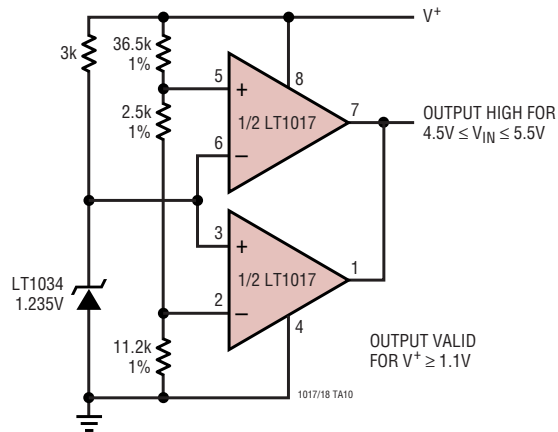


**Precise Tri-Wave Generator**

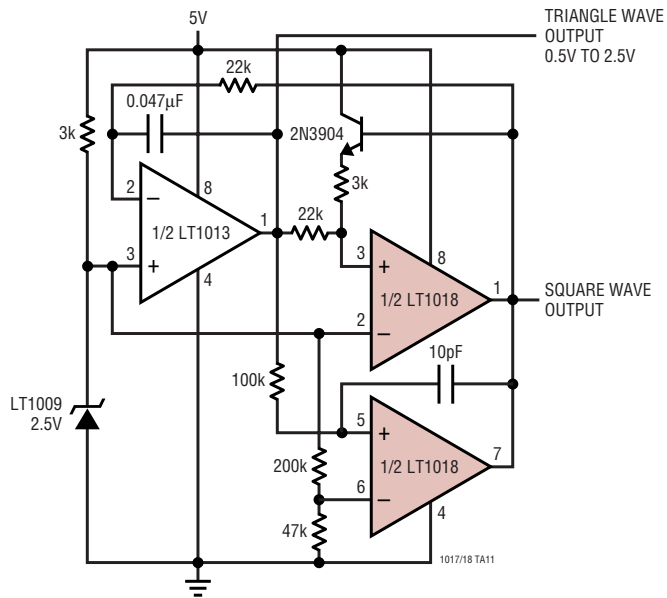


**TYPICAL APPLICATIONS**

**Power Supply Monitor**

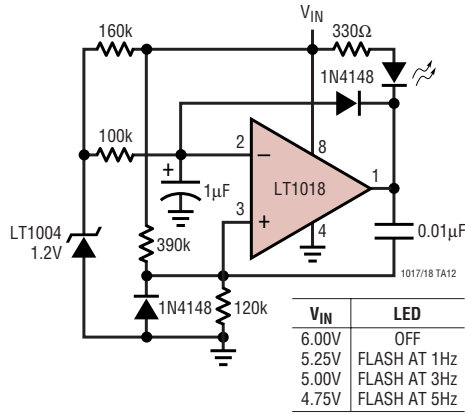


**1.5V Input Flyback Regulator**

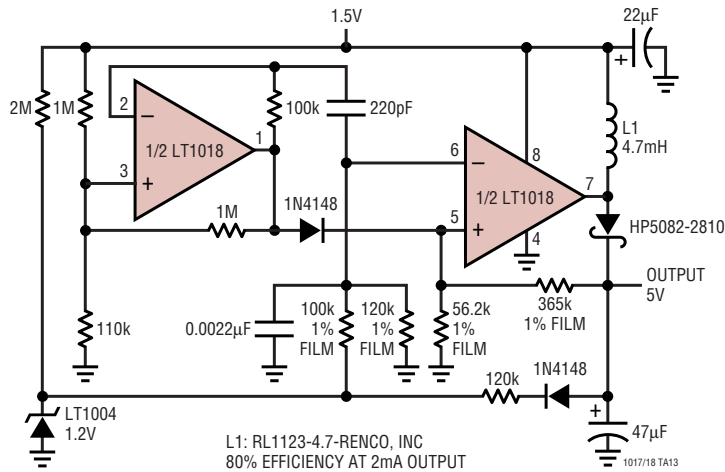




TYPICAL APPLICATIONS


Regulated Step-Up Converter

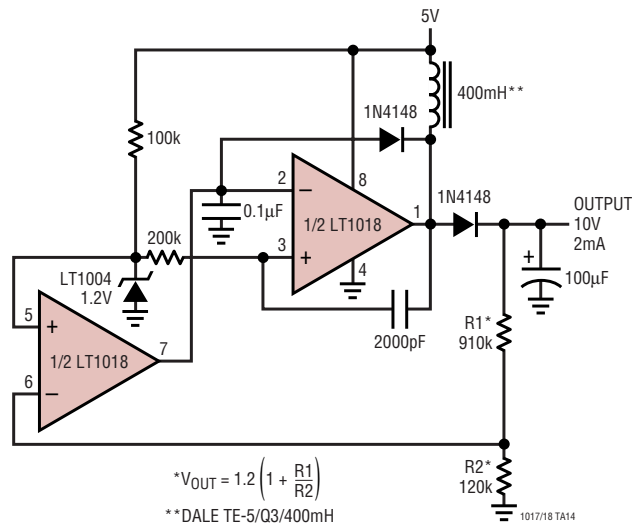


Low Power\* V-to-F Converter

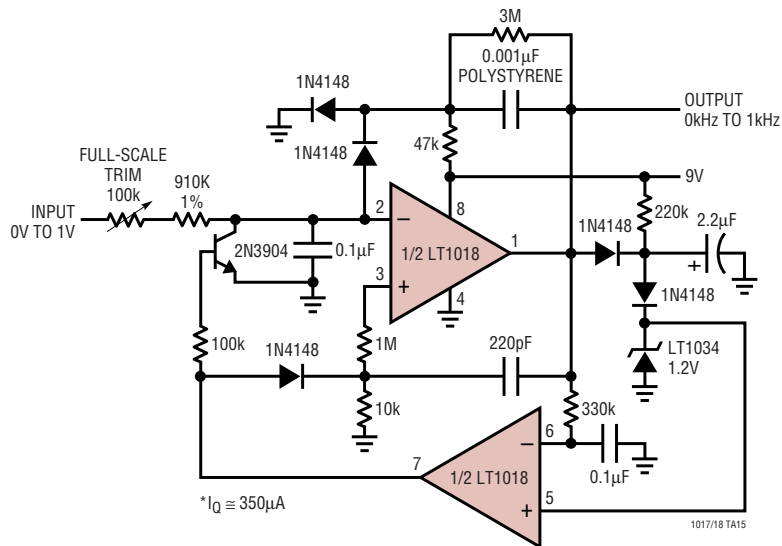

**PACKAGE DESCRIPTION**

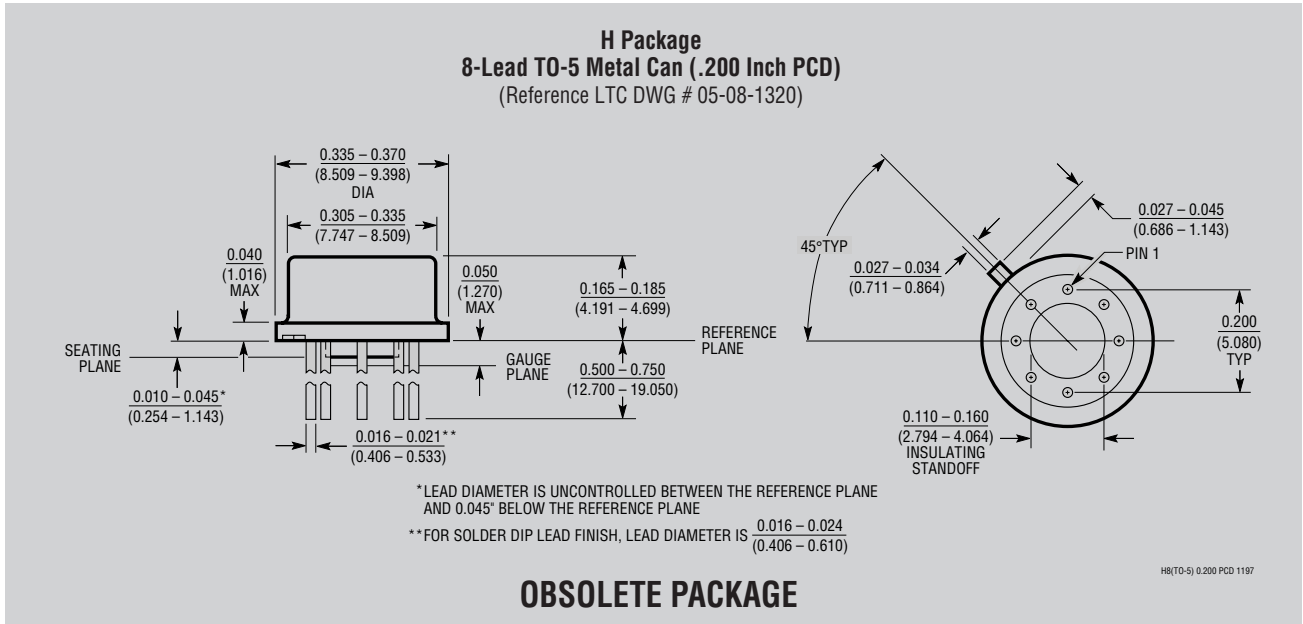


**N8 Package**  
**8-Lead PDIP (Narrow .300 Inch)**  
 (Reference LTC DWG # 05-08-1510)

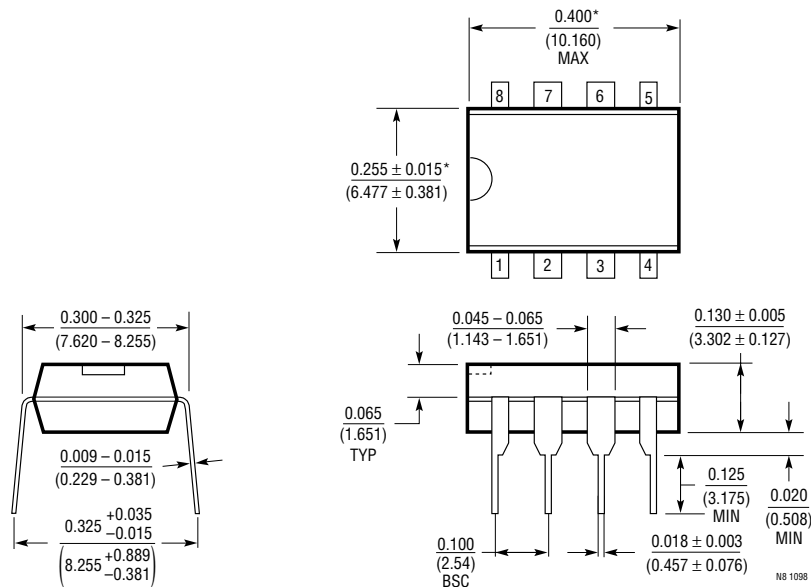


# PACKAGE DESCRIPTION

## S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

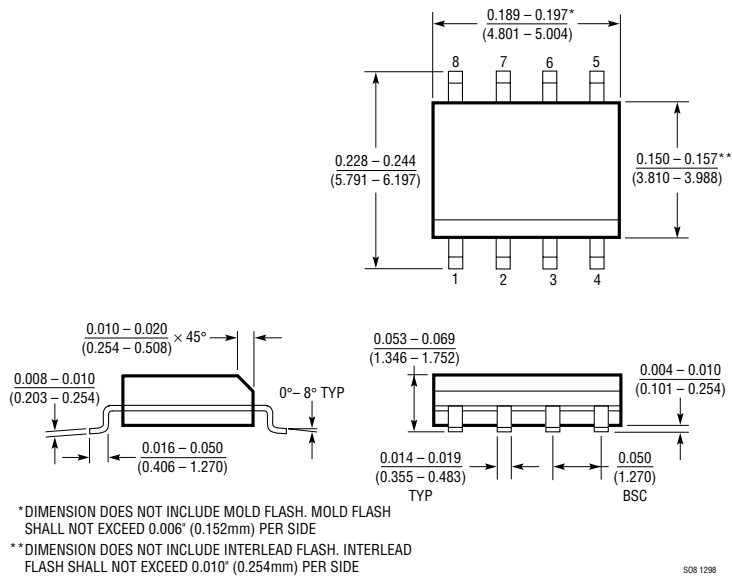


## SW Package 16-Lead Plastic Small Outline (Wide .300 Inch) (Reference LTC DWG # 05-08-1620)

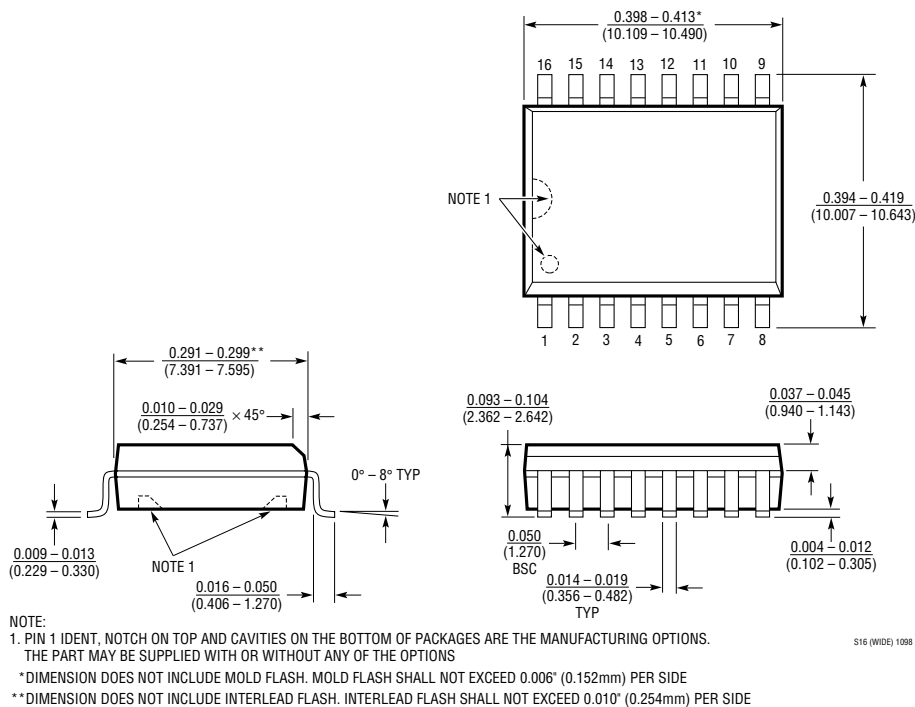

**TYPICAL APPLICATION**

Fully Isolated Limit Comparator

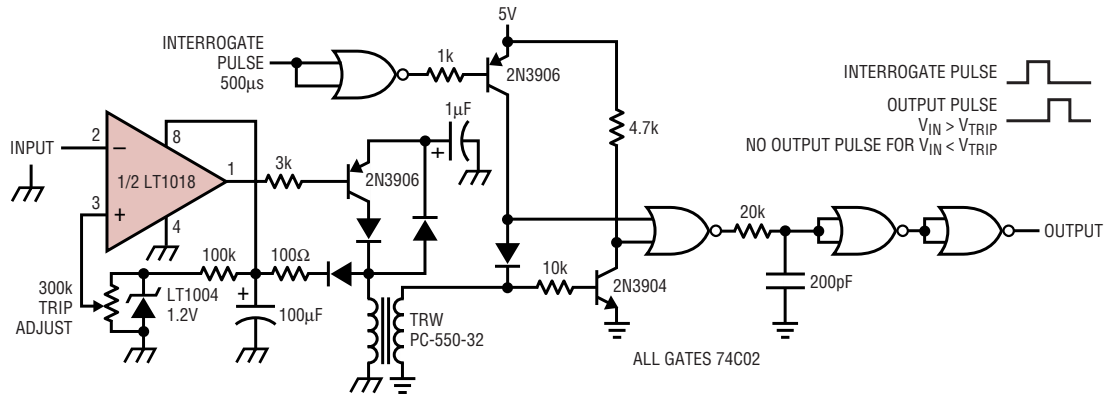

**RELATED PARTS**

PART NUMBER	DESCRIPTION	COMMENTS
LT1011/LT1011A	Voltage Comparators	Improved LT111A, 0.5mV $V_{OS(MAX)}$ , 25nA $I_{B(MAX)}$ , 3nA $I_{OS(MAX)}$ , 250ns $t_{PD(MAX)}$
LT1020	Micropower Regulator and Comparator	40μA $I_{SUPPLY}$ , 125mA $I_{OUT}$ , 2.5V Reference Voltage
LTC1040	Dual Micropower Comparator	1.5μW (1Sample/Second), 0.5mV $V_{OS(MAX)}$ , Rail-to-Rail Input
LT1120/LT1120A	Micropower Regulator with Comparator and Shutdown	20μA $I_{SUPPLY}$ , 125mA $I_{OUT}$ , 2.5V Reference Voltage
LT319A	Dual Comparators	0.5mV $V_{OS(MAX)}$ , 25mA $I_{OUT}$ , 80ns $t_{PD}$
LT1671	Single Supply Ground Sensing Comparator	450μA $I_{SUPPLY}$ , 60ns $t_{PD}$ , 0.8mV $V_{OS}$
LT1716	Micropower, 44V, SOT-23 Ground Sensing Comparator	Input Common Mode Range Extends from -5V to 44V from Negative Supply