



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE74LS10 Integrated Circuit TTL – Triple 3–Input Positive NAND Gate

Description:

The NTE74LS10 contains three independent 3–Input NAND gates in a 14–Lead plastic DIP type package.

Absolute Maximum Ratings: (Note 1)

Supply Voltage, V_{CC}	7V
DC Input Voltage, V_{IN}	7V
Operating Temperature Range, T_A	0°C to +70°C
Storage Temperature Range, T_{STG}	-65°C to +150°C

Note 1. Unless otherwise specified, all voltages are referenced to GND.

Recommended Operating Conditions:

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	V_{CC}	4.75	5.0	5.25	V
High–Level Input Voltage	V_{IH}	2.0	—	—	V
Low–Level Input Voltage	V_{IL}	—	—	0.8	V
High–Level Output Current	I_{OH}	—	—	-0.4	mA
Low–Level Output Current	I_{OL}	—	—	8	mA
Operating Temperature Range	T_A	0	—	+70	°C

Electrical Characteristics: (Note 2, Note 3)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Clamp Voltage	V_{IK}	$V_{CC} = \text{MIN}$, $I_I = -18\text{mA}$	—	—	-1.5	V
High Level Output Voltage	V_{OH}	$V_{CC} = \text{MIN}$, $V_{IL} = \text{MAX}$, $I_{OH} = -0.4\text{mA}$	2.7	3.4	—	V
Low Level Output Voltage	V_{OL}	$V_{CC} = \text{MIN}$, $V_{IH} = 2\text{V}$, $I_{OL} = 4\text{mA}$	—	—	0.4	V
		$V_{CC} = \text{MIN}$, $V_{IH} = 2\text{V}$, $I_{OL} = 8\text{mA}$	—	0.25	0.5	V
Input Current	I_I	$V_{CC} = \text{MAX}$, $V_I = 7\text{V}$	—	—	0.1	mA

Note 2. For conditions shown as MIN or MAX, use the appropriate value specified under "Recommended Operation Conditions".

Note 3. All typical values are at $V_{CC} = 5\text{V}$, $T_A = +25^\circ\text{C}$.

Electrical Characteristics (Cont'd): (Note 2, Note 3)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
High Level Input Current	I _{IH}	V _{CC} = MAX, V _I = 2.7V	-	-	20	µA
Low Level Input Current	I _{IL}	V _{CC} = MAX, V _I = 0.4V	-	-	-0.4	mA
Short-Circuit Output Current	I _{OS}	V _{CC} = MAX, Note 4	-20	-	-100	mA
High Level Supply Current	I _{CCH}	V _{CC} = MAX, V _I = 0	-	0.6	1.2	mA
Low Level Supply Current	I _{CCL}	V _{CC} = MAX, V _I = 4.5V	-	1.8	3.3	mA

Note 2. For conditions shown as MIN or MAX, use the appropriate value specified under "Recommended Operation Conditions".

Note 3. All typical values are at V_{CC} = 5V, T_A = +25°C.

Note 4. Not more than one output should be shorted at a time, and the duration of the short-circuit should not exceed one second.

Switching Characteristics: (V_{CC} = 5V, T_A = +25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Propagation Delay Time From A, B or C Input to Y Output	t _{PLH}	R _L = 2kΩ, C _L = 15pF	-	9	15	ns
	t _{PHL}		-	10	15	ns


Function Table (Each Gate):

Inputs			Output
A	B	C	Y
H	H	H	L
L	X	X	H
X	L	X	H
X	X	L	H

H = HIGH Voltage Level

L = LOW Voltage Level

X = Don't Care

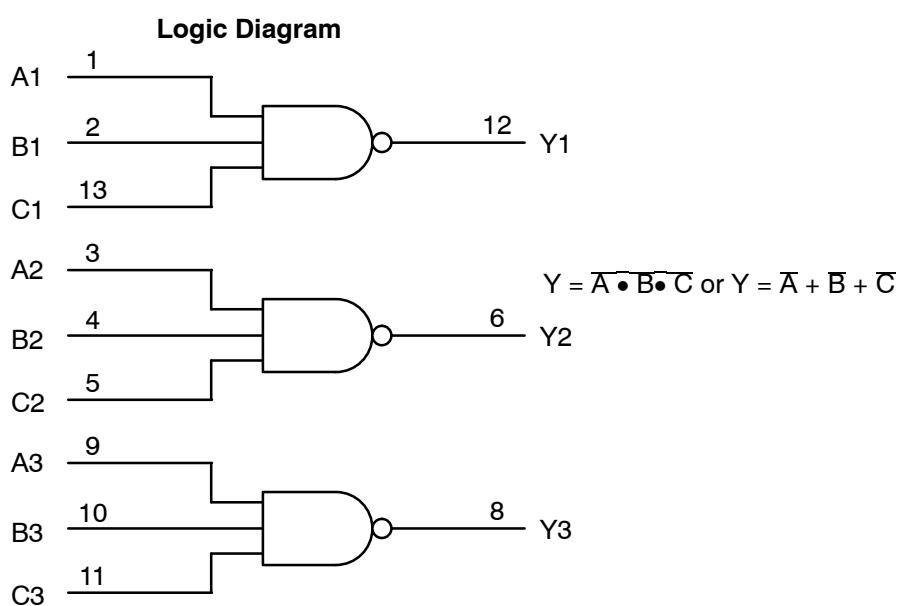

Pin Connection Diagram

