
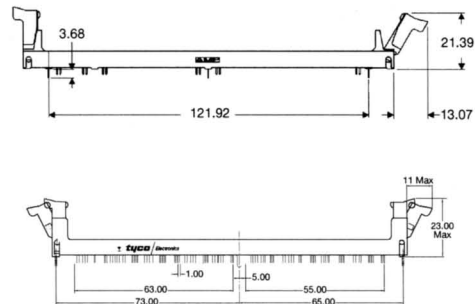
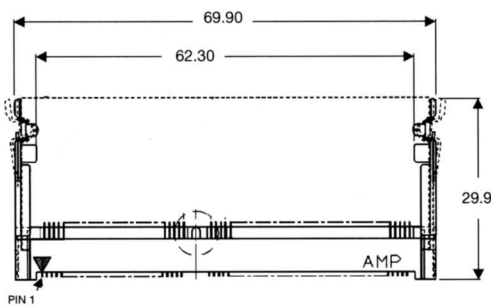


**Memory / DIMM Sockets**

- 124 - 240 position sockets
- Surface mount & through hole
- UL approved

**Specification:**

**Housing** - High temperature nylon  
**Contacts** - Phosphor bronze, gold finish  
**Current Rating** - 0.5A max.

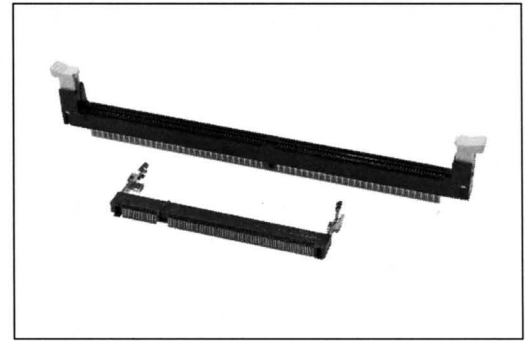

No. of Positions	Product Type	Pitch (mm)	Voltage	Module Type	Module Orientation	Profile	Termination Style	Part Number
124	Fax Modem Socket	0.8	-	-	Right Angle	Standard	SMT	6318228-1
144	SO DIMM	0.8	3.3	SDRAM	Right Angle	Standard	SMT	390113-1
144	SO DIMM	0.8	3.3	SDRAM	Right Angle	Low	SMT	390114-1
144	SO DIMM	0.8	3.3	SDRAM	Right Angle	High	SMT	390112-1
144	SO DIMM	0.8	3.3	SGRAM	Right Angle	High	SMT	390110-1
144	SO DIMM	0.8	3.3	SDRAM	Right Angle	Low	SMT	390111-1
168	DIMM	1.27	3.3	DRAM Non Buffered	Vertical	Standard	Through Hole	5390168-1
168	DIMM	1.27	3.3	DRAM Non Buffered	Right Angle	Low	Through Hole	1-5390171-6
168	DIMM	1.27	3.3	DRAM Non Buffered	25 Degrees	Low	Through Hole	5390170-6
168	DIMM	1.27	3.3	DRAM	Right Angle	Low	Through Hole	1-5390171-5
184	DIMM	1.27	2.5	DRAM - DDR 2	Vertical	Standard	Through Hole	5390241-1
200	SO DIMM	0.6	2.5	SDRAM - DDR 1	Right Angle	Standard	SMT	1473005-1
200	SO DIMM	0.6	1.8	SDRAM - DDR 2	Right Angle	Standard	SMT	1473005-4
200	SO DIMM	0.6	2.5	SDRAM - DDR 1 - Reverse	Right Angle	Standard	SMT	1473006-1
200	SO DIMM	0.6	1.8	SDRAM - DDR 2 - Reverse	Right Angle	Standard	SMT	1473006-4
240	DIMM	1.00	1.8	SDRAM - DDR 2	Vertical	Standard	Through Hole	1775802-1
240	DIMM	1.00	1.8	SDRAM - DDR 2 Fully Buffered	Vertical	Standard	Through Hole	1-1761024-1