

Cooper Bussmann

[Homepage](#)
[About Cooper Bussmann](#)
[Contact Us](#)
[Privacy](#)
[Legal](#)
[Cooper Bussmann® Brand](#)
[Site Map](#)



KTK-15

Fast-Acting Supplementary Fuse, 600V, 13/32 - 1-1/2 Inches

Product Information

| | |
|------------------|--------------------------|
| Product Type: | Fuse |
| Product Family: | Electrical Power |
| Upgrade Product: | LP-CC-15 |
| Brand: | Cooper Bussmann |
| Sub-brand: | Low-Peak |

Certifications

[UL Listed](#)

[CSA Certified](#)

Recommended Products

| | |
|-------------------------------|-------------------------------|
| Rec. Fuse Block: | BM603 Series |
| Rec. Inline Fuse Holder: | HEB Series |
| Rec. Panel-mount Fuse Holder: | HPS Series |
| Rec. Modular Fuse Holder: | CHM Series |
| Rec. Fuse Clips: | 5960 Series |
| Rec. Cover: | SAMI-7 Series |

Electrical Properties

| | |
|--------------------------|--|
| Maximum AC Voltage: | 600 |
| Amperage Rating: | 15 |
| AC Interrupting Ratings: | <ul style="list-style-type: none"> 100000 at 600V |
| Fast Acting: | Yes |

Physical Properties

| | |
|-------------|----------------------------------|
| Dimensions: | 1.5in.(L) × 0.41in.(W) × 0in.(H) |
|-------------|----------------------------------|


LIMITRON®

Fast-Acting Fuses

600 Volt, 1/10 - 30 Amps



Dimensional Data

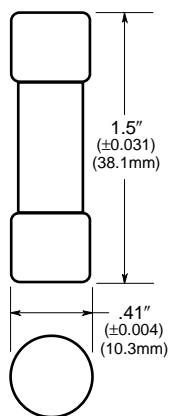

Catalog Symbol: KTK

Fast-Acting

1/10 TO 30A

600Vac (or less)

Interrupting Rating: 100,000A RMS Sym. (UL)

UL Listed, STD. 248-14, (Guide #JDYX, File #E19180)

CSA Certified: C22.2 NO. 248.14

(File #53787—Class #1422-01)

HRC-MISC

Electrical Ratings (Catalog Symbol and Amperes)


600Vac - UL Listed and C.S.A.

| | | | |
|----------|-----------|-----------|--------|
| KTK-1/10 | KTK-1 | KTK-6 | KTK-25 |
| KTK-1/8 | KTK-1-1/4 | KTK-7 | KTK-30 |
| KTK-2/10 | KTK-1-1/2 | KTK-7-1/2 | — |
| KTK-1/4 | KTK-2 | KTK-8 | — |
| KTK-3/10 | KTK-2-1/2 | KTK-9 | — |
| KTK-4/10 | KTK-3 | KTK-10 | — |
| KTK-1/2 | KTK-3-1/2 | KTK-12 | — |
| KTK-6/10 | KTK-4 | KTK-15 | — |
| KTK-3/4 | KTK-5 | KTK-20 | — |

Carton Quantity and Weight

| Ampere Ratings | Carton Qty. | Weight* | |
|----------------|-------------|---------|------|
| | | Lbs. | Kg. |
| 1-30 | 10 | .180 | .082 |

*Weight per carton.




Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses
See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

- LIMITRON® fast-acting fuse.
- Melamine tube.
- Nickel-plated bronze endcaps.

Time-Current Characteristic Curves—Average Melt

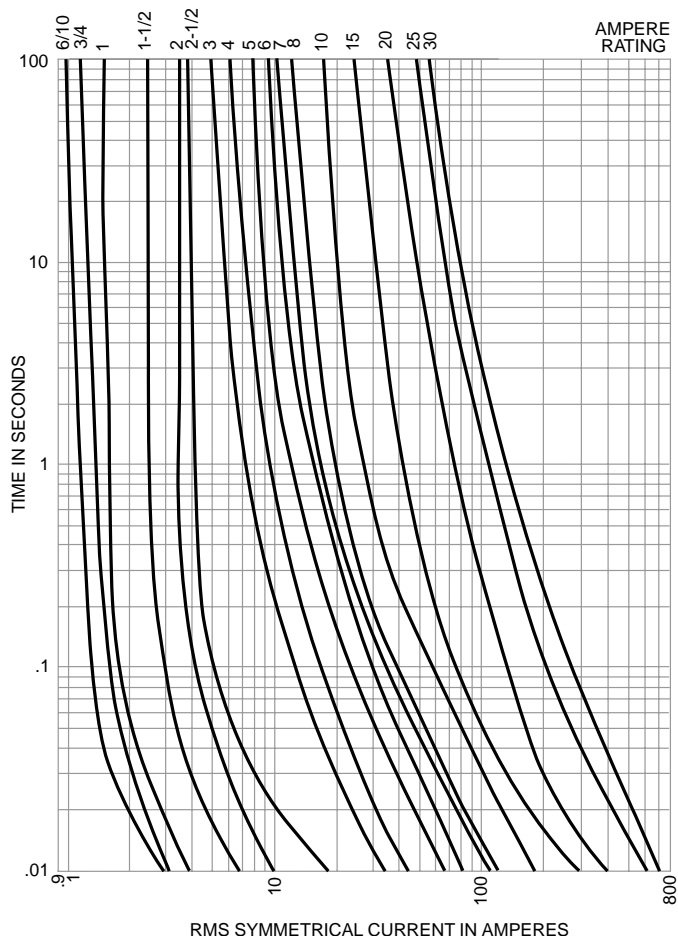

CE