


SMT Cable Clip

Cable Management & Grounding

- ❖ Suitable for use with insulated cables with outer diameters $\varnothing 0.9$ to $\varnothing 3$ mm and grounding braided coax cables.
- ❖ Cable clip can be soldered at same time as rest of board, reducing additional operation time required for mounting plastic clip types.
- ❖ Low profile & small footprint saves PCB space.

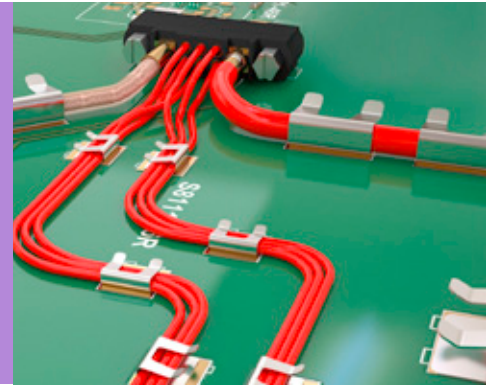





Materials

Material: Copper Alloy
Finish: Tin

Packaging

Format: Tape & Reel or Loose
Reel quantity: $\varnothing 330$ mm reel, see table

CALCULATION							
Part No.	A	B	C	D	Coax Grounding	Cable Retention	Reel Quantity
S8091-46R	5.00	4.00	1.35	0.70	$\varnothing 1.12$ mm	2 x $\varnothing 0.9$ mm	3,000
S8101-46R	5.00	4.00	1.50	0.80	RG178, RG179, RG316	2 x $\varnothing 1.0$ mm	3,000
S8111-46R	5.00	5.00	2.05	0.80	RG174, RG179, RG316	3 x $\varnothing 1.0$ mm, 2 x $\varnothing 1.5$ mm	1,500
S8121-46R	7.00	5.50	2.55	1.30		2 x $\varnothing 1.5$ mm, 1 x $\varnothing 2.0$ mm	1,300
S8131-46R	10.00	8.00	3.55	1.80	RG58	3 x $\varnothing 2.0$ mm, 1 x $\varnothing 3.0$ mm	800



Recommended PC Board Pattern

HOW TO ORDER

S8XX1 - 46 R

SERIES CODE

See Table

FINISH

46 Tin

PACKAGING

R	Tape & Reeled
Blank	Loose

All dimensions in mm.