




C1608X7R1C224K080AC (TDK item description : C1608X7R1C224KT****)

Applications	 Commercial Grade
	 Please refer to Part No. CGA3E2X7R1C224K080AA for automotive use.
Feature	General General (Up to 50V)
Series	C1608 [EIA CC0603]




Size	
Length(L)	1.60mm +/-0.10mm
Width(W)	0.80mm +/-0.10mm
Thickness(T)	0.80mm +/-0.10mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	0.30mm Min.
Recommended Land Pattern(PA)	0.70 to 1.00mm (Flow Soldering) 0.60 to 0.80mm (Reflow Soldering)
Recommended Land Pattern(PB)	0.80 to 1.00mm (Flow Soldering) 0.60 to 0.80mm (Reflow Soldering)
Recommended Land Pattern(PC)	0.60 to 0.80mm (Flow Soldering) 0.60 to 0.80mm (Reflow Soldering)
Recommended Slit Pattern(SD)	

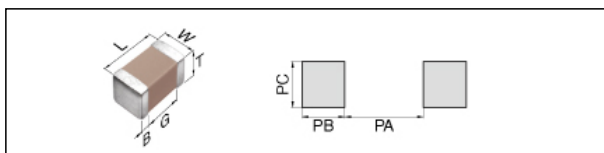Electrical Characteristics	
Capacitance	220nF +/-10%
Rated Voltage	16Vdc
Temperature Characteristic	X7R(+/-15%)
Dissipation Factor	5% Max.
Insulation Resistance	454MΩ Min.


Other	
Soldering Method	Reflow, Flow
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.

C1608X7R1C224K080AC


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

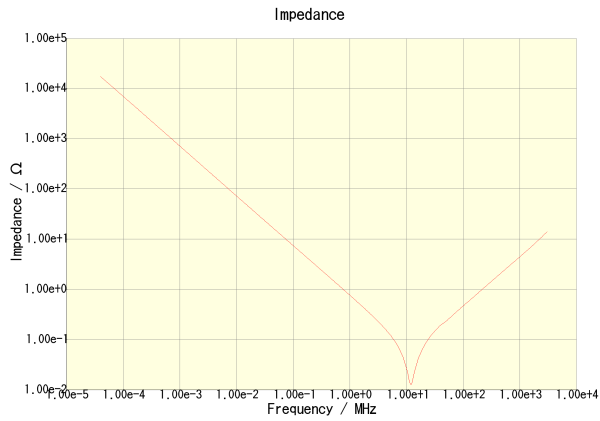


C1608X7R1C224K080AC

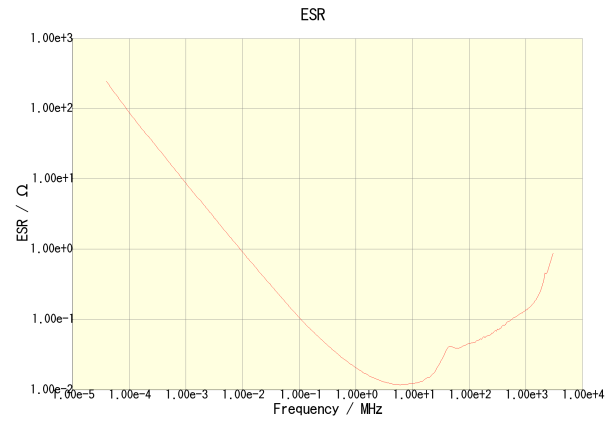


C1608X7R1C224K080AC

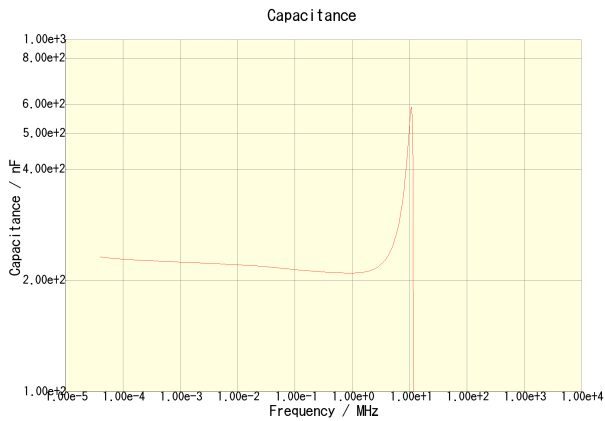


C1608X7R1C224K080AC

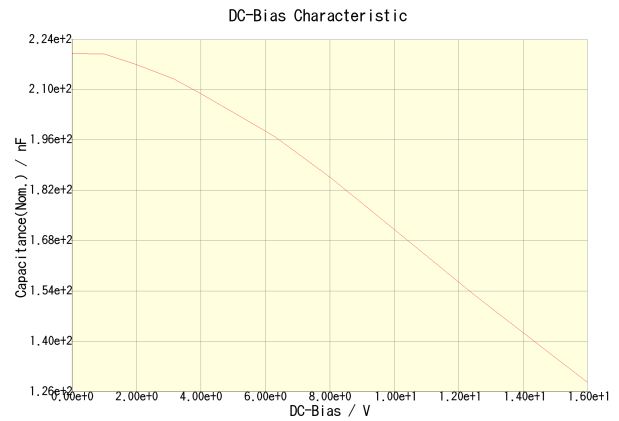

C1608X7R1C224K080AC

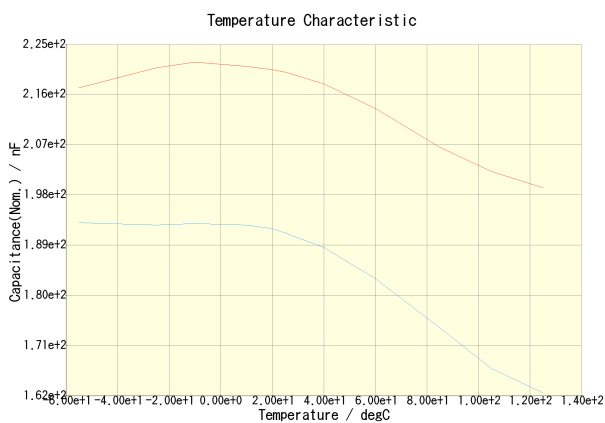

C1608X7R1C224K080AC(DC Bias = 0V) C1608X7R1C224K080AC(DC Bias = 8V)

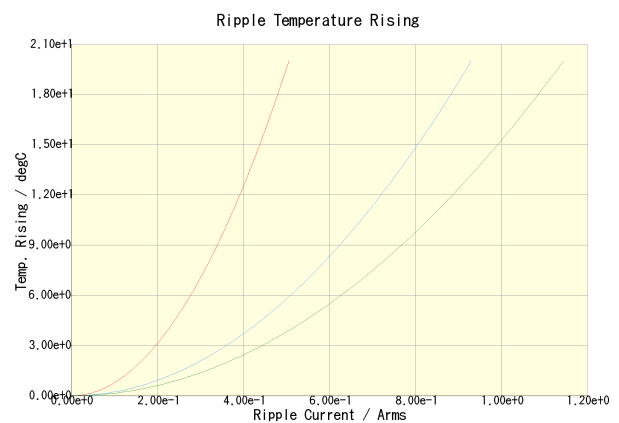

C1608X7R1C224K080AC(100kHz) C1608X7R1C224K080AC(500kHz)
C1608X7R1C224K080AC(1MHz)