

CERTI-CRIMP II SAHT

Standard Straight Action Hand Tool Design
Widely used in the Aircraft and Military industries

Image representative of type only

Features:

Fixed dies
Straight action jaw closure
Ratchet mechanism ensures complete crimp cycle
Emergency only ratchet release
Terminal/wire positioning aids & Ins. adjustment on most tools
Ergonomic non-slip handles
Approximate weight 0.59 kg (1.3 lbs)



| Part Number | Description | mm ² (AWG) or other |
|-------------|--|--|
| 91572-1 | AMP CT 2.0 Receptacle | 0.12 - 0.4 (26-22) |
| 91576-1 | AMP DYNAMIC D-2 | 0.08 - 0.22 (28-24) |
| 91595-1 | AMP DYNAMIC D-2 | 0.4 - 1.0 (22-18) |
| 91558-1 | AMP DYNAMIC D-3 | 0.6 - 1.5 (20-16) |
| 91559-1 | AMP DYNAMIC D-3 | 0.2 - 0.6 (24-20) |
| 91503-1 | AMPLIMITE HD-20 | 0.08 - 0.6 (28-20) Ins. Ø0.76-1.52mm |
| 91513-1 | AMPLIMITE HD-20 | 0.4 - 1.0 (22-18) No Ins. Crimp |
| 91548-1 | AMPLIMITE HD-20 | 0.08 - 0.6 (28-20) No Ins. Crimp |
| 91549-1 | AMPLIMITE HD-20 | 0.08 - 0.22 (28-24) Ins. Ø0.76-1.52mm |
| 91520-1 | AMPLIMITE HD-22 | 0.08 - 0.4 (28-22) Ins. Ø0.76-1.27mm |
| 91537-1 | AMPMODU II FFC | 0.15 - 0.4 (26-22) |
| 91516-1 | AMPMODU IV | 0.05 - 0.6 (30-20) |
| 91517-1 | AMPMODU IV, V | 0.15 - 0.4 (26-22) Ins. Ø1.02-1.52mm |
| 91512-1 | Commercial MATE-N-LOK | 0.2 - 1.0 (24-18) Ins. Ø1.52-2.54mm |
| 91501-1 | Micro MATE-N-LOK | 0.2 - 0.6 (24-20) Ins. Ø0.89-1.53mm |
| 91502-1 | Micro MATE-N-LOK | 0.05 - 0.12 (30-26) Ins. Ø0.89-1.53mm |
| 91522-1 | Mini-Universal MATE-N-LOK | 0.4 - 1.0 (22-18) Ins. Ø1.5-2.39mm |
| 91529-1 | Mini-Universal MATE-N-LOK | 0.15 - 0.4 (26-22) Ins. Ø1.19-1.75mm |
| 91536-1 | Mini-Universal MATE-N-LOK "F" Ins. Crimp | 0.5 - 1.42 (22-16) Ins. Ø2.0-3.2mm |
| 91594-1 | Mini-Universal MATE-N-LOK "O/L" Ins. Crimp | 0.5 - 1.42 (22-16) Ins. Ø2.0-3.2mm |
| 91577-1 | MULTILOCK 040 | 0.4 - 0.6 (22-20) |
| 91505-1 | TYPE III+ | 0.2 - 1.42 (24-16) Ins. Ø1.14-2.54mm |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

CERTI-CRIMP II SAHT - Short Handle

Ideal for working in confined spaces
 Widely used in the Aircraft and Military industries

Image representative of type only

Features:

- Fixed dies
- Straight action jaw closure
- Ratchet mechanism ensures complete crimp cycle
- Emergency only ratchet release
- Terminal/wire positioning aids & Ins. adjustment on most tools
- Ergonomic non-slip handles
- Approximate weight 0.5 kg (1.1 lbs)



| Part Number | Description | mm ² (AWG) or other |
|-------------|---------------------------------------|--------------------------------|
| 1901600-2 | PIDG STRATO-THERM Terminals & Splices | 1.0 - 1.5 (18-16) |
| 1901611-2 | PIDG STRATO-THERM Terminals & Splices | 0.2 - 0.6 (24-20) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

CERTI-CRIMP II SAHT - Long Handle

Low handle force for ease of operation
 Widely used in the Aircraft and Military industries

Image representative of type only

Features:

- Fixed dies
- Straight action jaw closure
- Ratchet mechanism ensures complete crimp cycle
- Emergency only ratchet release
- Terminal/wire positioning aids & Ins. adjustment on most tools
- Ergonomic non-slip handles
- Approximate weight 0.59 kg (1.3 lbs)



| Part Number | Description | mm ² (AWG) or other |
|-------------|---------------------------------------|--------------------------------|
| 1901600-1 | PIDG STRATO-THERM Terminals & Splices | 1.0 - 1.5 (18-16) |
| 1901611-1 | PIDG STRATO-THERM Terminals & Splices | 0.2 - 0.6 (24-20) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

CERTI-CRIMP II SAHT - Head Assy (Square)

Head only for use with Power Assist options

Image representative of type only

Features:

- Fixed Dies
- Straight action jaw closure
- Ratchet mechanism ensures complete crimp cycle
- Emergency only ratchet release
- Terminal/wire positioning aids & Ins. adjustment on most tools

Use with:

- 1213805-[] Battery Tool Kit
- 1213860-[] Adapter, Electric Terminator

| Part Number | Description | mm ² (AWG) or other |
|-------------|---------------------------------------|--------------------------------|
| 1-1901600-2 | PIDG STRATO-THERM Terminals & Splices | 1.0 - 1.5 (18-16) |
| 1-1901611-1 | PIDG STRATO-THERM Terminals & Splices | 0.2 - 0.6 (24-20) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

CERTI-CRIMP II SA Battery Tool Kit

Convert your existing Hand Tools into Powered!

- 1213805-2 - Kit only without Head
- 1213805-5 - Kit only without Head (GB Power Plug)

Image representative of type only


Features:

Heads can be removed from Hand Tools, or are also available as a [-3] option.
 Example 91500-1 CERTI-CRIMP II SAHT; handles can be removed and the head used with this kit. Alternatively 91500-3 (head only) is also available.

Over 100 crimps per charge
 Compact - only 360mm (14") long and weighs 1.57kg (3.48lbs)

The Tool Kit is supplied in a durable plastic carry case and includes:
 Battery Tool with the relevant CERTI-CRIMP II SAHT Adapter
 Battery Charger 230 v
 Two Batteries

for more information, please see the Power Assist section

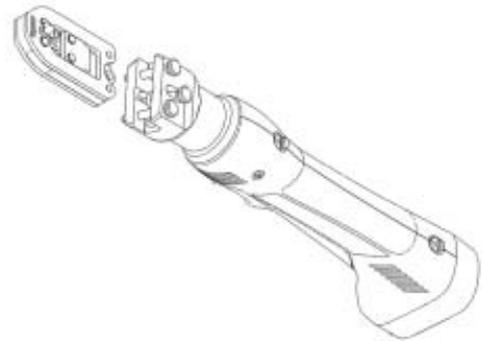

Adapter - CERTI-CRIMP II to Electric Terminator

1213860-1 - Adapter only

Features:

For use with Electric Terminators (1673677-2 or 1490076-2) and any CERTI-CRIMP II SAHT Head.

Heads can be removed from Hand Tools, or are also available as a [-3] option.
 Example 91500-1 CERTI-CRIMP II SAHT; the head can be removed from the handles and used along with this adapter on the Electric Terminator . Alternatively 91500-3 (head only) is also available.

Image representative of type only



Double Action Hand Tool

Note: The approvals shown against the tools listed are only applicable when using terminals and wires recommended for the relevant industry.

Image representative of type only

Widely used in Aircraft and Military applications

Features:

Fixed dies

Ratchet mechanism ensures complete crimp cycle

Emergency only ratchet release

Terminal/wire positioning aids & Ins. adjustment on many tools

Ergonomic non-slip handles

Approximate weight 0.54 kg (1.2 lbs)



| Part Number | Description | mm ² (AWG) or other |
|-------------|---|--|
| 45216 | PIDG Closed End Splice | 1.0 - 1.5 (18-16) |
| 90009-8 | Special GB Railways PIDG FASTON Tool Qualifications: LUL RSE 024 pt6 & EE6161 | 1.5 - 2.5 (16-14) |
| 90035-3 | Special GB Railways PIDG FASTON Tool Qualifications: LUL RSE 024 pt6 & EE6161 | 0.4 - 1.0 (22-18) |
| 482930-1 | Special French tool for PIDG FASTON 2.8 (.110) with crimp orientation at 90° Marks the applied product with a one dot indent code. | 0.15 - 0.4 (26-22) |
| 46121 | Standard Tool for PIDG Terminals & Splices; PLASTI-GRIP Butt Splices Qualifications: Mil-T-7928; LUL RSE 024 pt6 & EE6161 Marks the applied product with a one dot indent code | 0.15 - 0.4 (26-22) |
| 47386 | Standard Tool for PIDG & PLASTI-GRIP Terminals and PIDG Splices - GB Railways Qualifications: Mil-T-7928/7; LUL RSE 024 pt6 & EE6161 Marks the applied product with a one dot indent code. | 0.4 - 1.5 (22-16) Ins. Ø3.18mm max |
| 47386-5 | French PIDG & PLASTI-GRIP Ring Tongue Tool - includes French Instruction Sheet Meets Mil-T-7928 - AMP specified level Marks the applied product with a one dot indent code. | 0.4 - 1.5 (22-16) |
| 47387 | Standard Tool for PIDG & PLASTI-GRIP Terminals and Splices - GB Railways Qualifications: Mil-T-7928; LUL RSE 024 pt6 & EE6161 Marks the applied product with a two dot indent code. | 1.25 - 2.0 (16-14) 0.6 - 1.5 (20-16) HD Ins. Ø3.8mm1 max |
| 525690 | Special GB Aerospace PIDG & PLASTI-GRIP Ring Tongue Tool. Equivalent to 47386 but has special retaining pins/rings to reduce the risk of tool parts falling off whilst building and maintaining aircraft. | 0.6 - 1.0 (20-18) |
| 525691 | Special GB Aerospace PIDG & PLASTI-GRIP Ring Tongue Tool. Equivalent to 47387 but has special retaining pins/rings to reduce the risk of tool parts falling off whilst building and maintaining aircraft. | 1.5 - 2.5 (16-14) |
| 47386-4 | GB Special for PIDG & PLASTI-GRIP Ring Tongue's & FASTON's Meets Mil-T-7928 - AMP specified level for Ringtongues only Marks the applied product with a one dot indent code. | 0.4 - 1.5 (22-16) |
| 47387-7 | GB Special for PIDG & PLASTI-GRIP Ring Tongue's and FASTON's: Meets Mil-T-7928 - AMP specified level for Ring Tongues only Marks the applied product with a two dot indent code. | 1.5 - 2.5 (16-14) 0.6 - 1.5 (20-16) HD |
| 46447 | SOLISTRAND High Temp Terminals and Splices | 0.4 - 6.0 (22-10) |
| 49592 | Standard Tool for SOLISTRAND Terminals & Splices Qualifications: Mil-T-7928 | 2.5 - 4.0 (14-12) |
| 49935 | Standard Tool for SOLISTRAND Terminals and Splices Qualifications: Mil-T-7928; LUL RSE 024 pt6 & EE6161 | 0.4 - 6.0 (22-10) |
| 69363 | Standard tool for SOLISTRAND Terminals & Splices Qualifications: Mil-T-7928; LUL RSE 024 pt6 & EE6161 | 0.15 - 0.6 (26-20) |
| 525693 | Special tool for SOLISTRAND Terminals & Splices (GB) Qualifications: Mil-T-7928; LUL RSE 024 pt6 & EE6161 Equivalent to 49935 but has special retaining pins/rings to reduce the risk of tool parts falling off whilst building and maintaining aircraft. | 0.4 - 6.0 (22-10) |
| 46673 | STRATO-THERM Uninsulated Terminals & Splices | 0.4 - 1.5 (22-16) |
| 46673-1 | STRATO-THERM Uninsulated Terminals & Splices without Insulation Support | 0.4 - 1.5 (22-16) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

Double Action Hand Tool Battery Tool Kit

Convert your existing Hand Tools into Powered!

1213804-2 - Kit only without Head

1213804-5 - Kit only without Head (GB Power Plug)

Image representative of type only

Features:

Example 47386 DAHT; handles can be removed and the head used with this kit.

Over 100 crimps per charge

Compact - only 360mm (14") long and weighs 1.57kg (3.48lbs)


The Tool Kit is supplied in a durable plastic carry case and includes:

Battery Tool with the relevant DAHT Adapter

Battery Charger 230 v

Two Batteries

for more information, please see the Power Assist section

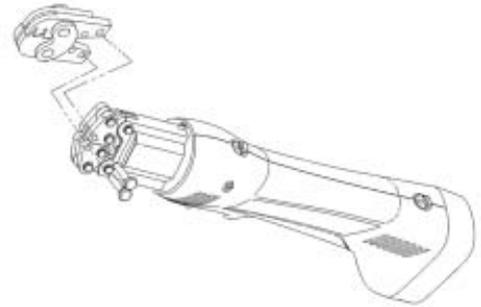

Adapter - Double Action Hand Tool to 626 Pneumatic

1213563-1 - Adapter only

Image representative of type only

Features:

Heads can be removed from Hand Tools, example: the Handles from 47386 can be removed and the head used with this Adapter (includes cam).


Also required:

Hand held power unit 189721-1

or

Foot actuated Power Unit 189722-1

for more information, please see the Power Assist section

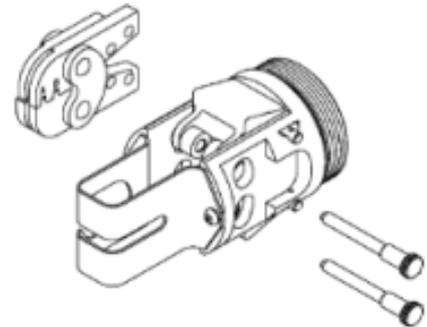

C-Head SAHT

69710-1 - Base Tool without Die-set
Widely used in Aircraft and Military applications
Can be used with all C-Head SAHT Dies

Image representative of type only

Features:

Interchangeable Dies
Straight action jaw closure
Ratchet mechanism ensures complete crimp cycle
Emergency only ratchet release
Approximate weight 0.86 kg (1.9 lbs)



C-Head SAHT - LD

1901260-1 Base Tool without Die-set
A light duty alternative to 69710-1
Can be used with all C-Head SAHT Dies EXCEPT:
- Die-set - C-Head SAHT - HD
- Through Splice applicatons

Image representative of type only

Features:

Interchangeable Dies
Straight action jaw closure
Ratchet mechanism ensures complete crimp cycle
Emergency only ratchet release
Ergonomic non-slip handles
Approximate weight 0.5 kg (1.1 lbs)



Die-set - C-Head SAHT

A range of Die-sets for many premium crimp applications

Features:

Use in:

Hand Tool Frame 69710-1

Hand Tool Frame 1901260-1 (see restrictions)

Battery Tool Kits:

Open Head 1213840-[]


Closed Head 1213819-[]

Adapters for C-Head Dies:

Electric Terminator 1901556-1

Press SSC- 2FP 8-1481221-3

Image representative of type only

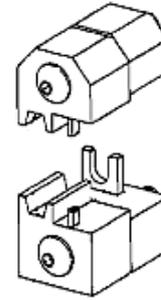

| Part Number | Description | mm ² (AWG) or other |
|-------------|--|-------------------------------------|
| 58212-1 | AMPLIMITE | RG 142, 142A, 142B |
| 576711 | PIDG STRATO-THERM Terminals & Splices | 0.2 - 0.4 (24-22) |
| 576714 | PIDG STRATO-THERM | 1.5 (16) |
| 576715 | PIDG STRATO-THERM | 1.0 (18) |
| 576720 | PIDG STRATO-THERM | 0.5 (22) |
| 47807-1 | PIDG, PLASTI-GRIP Terminals & Splices | 1.5 - 2.5 (16-14) |
| 47806-2 | PIDG, PLASTI-GRIP, Terminals & Splices | 0.4 - 1.5 (22-16) |
| 1-539634-9 | Pin 50 ohm, size 8 kit | Gore Cable Type: GSC-03-81748-00 |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

Die-set - C-Head SAHT - HD

A range of Heavy Duty Die-sets for many premium crimp applications

Features:

Use in:


Hand Tool Frame 69710-1

Adapters for C-Head Dies:

Electric Terminator 1901556-1

Press SSC- 2FP 8-1481221-3

Image representative of type only

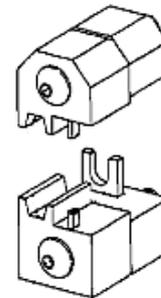

| Part Number | Description | mm ² (AWG) or other |
|-------------|---------------------------------------|--------------------------------|
| 59993-1 | AMPLIMITE | 8 (10) |
| 576716 | PIDG STRATO-THERM Terminals & Splices | 2.5 (14) |
| 576723 | PIDG STRATO-THERM Terminals & Splices | 6.0 (10) |
| 576742 | PIDG STRATO-THERM Terminals & Splices | 4.0 (12) |
| 69735 | PIDG STRATO-THERM Terminals & Splices | 4.0 - 6.0 (12-10) |
| 47808-6 | PIDG, PLASTI-GRIP Terminals & Splices | 4.0 - 6.0 (12-10) |
| 90140-1 | TYPE XII Contact | 6.0 - 10.0 (10-8) |
| 90145-1 | TYPE XII Contact | 2.5 - 4.0 (14-12) |
| 58380-1 | Universal MATE-N-LOK | 3.0 (12) |
| 58380-2 | Universal MATE-N-LOK | 5.0 (10) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

C-Head SAHT Battery Tool Kit

- 1213819-2 - CLOSED head
- 1213819-5 - CLOSED head (GB Power Plug)
- 1213840-2 - OPEN head
- 1213840-5 - OPEN head (GB Power Plug)

Image representative of type only


Features:

- Over 100 crimps per charge
- Compact - only 360mm (14") long and weighs 1.57kg (3.48lbs)

The Tool Kit is supplied in a durable plastic carry case and includes:

- Battery Tool with the relevant C-Head SAHT Adapter
- Battery Charger 230 v
- Two Batteries

for more information, please see the Power Assist section

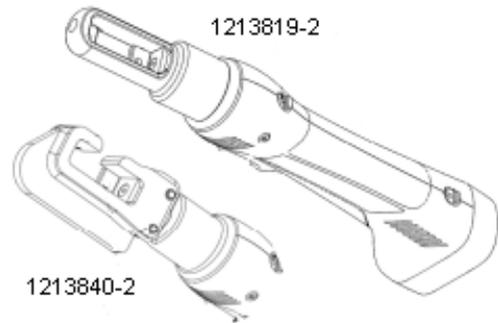

Adapter - C-Head SAHT to Bench Press SSC-2FP

8-1481221-3 - Adapter only

Features:

- Adapts Bench Top Press SSC- 2FP (1481004-7 pictured) to take C-Head SAHT Dies

for more information on the Press and Press options, please see the Power Assist section

Image representative of type only



Adapter - C-Head SAHT to Electric Terminator

1901556-1 - Adapter only

Features:

- Adapts the Electric Terminator to take C-Head SAHT Dies

for more information on the Press and Press options, please see the Power Assist section

Image representative of type only



Heavy Head Hand Tool

Note: The specifications shown against the tools listed are only applicable when using terminals recommended for the relevant industry
Widely used in Aircraft and Military applications

Image representative of type only

Features:

Fixed dies
Straight action jaw closure
Ratchet mechanism ensures complete crimp cycle
Emergency only ratchet release
Terminal/wire positioning aids & Ins. adjustment on most tools
Approximate weight 0.95 kg (2.1 lbs)



| Part Number | Description | mm ² (AWG) or other |
|-------------|---|---|
| 234170-1 | AMP DYNAMIC D-5 | 1.5 - 2.5 (16-14) |
| 234171-1 | AMP DYNAMIC D-5 | 4.0 - 6.0 (12-10) |
| 1366044-1 | AMP DYNAMIC D-5 Receptacle | 8.0 (10) Ins. Ø4.9-7.8mm |
| 90246-1 | Standard tool for PIDG FASTON | 2.5 - 4.0 (14-12) |
| 90276-2 | Special GB Railways PIDG FASTON Tool Qualifications: LUL RSE 024 pt6 & EE6161 | 4.0 - 6.0 (12-10) |
| 484364-1 | PIDG STRATO-THERM Terminals & Splices | 1.0 (18) |
| 576782 | Special GB Aerospace tool for thin-wall PIDG STRATO-THERM Terminals & Splices Qualified to BS 4G178 | 2.5 (14) |
| 576783 | Special GB Aerospace tool for thin-wall PIDG STRATO-THERM Terminals & Splices Qualified to BS 4G178 | 4.0 (12) |
| 576784 | Special GB Aerospace tool for thin-wall PIDG STRATO-THERM Terminals & Splices with PTFE or PEEK thin-wall Insulation Qualified to BS 4G178 | 6.0 (10) |
| 576778 | Special GB Aerospace tool for thin-wall PIDG STRATO-THERM Terminals & Splices Qualified to BS 4G178 | 0.2 - 0.4 (24-22) |
| 576779 | Special GB Aerospace tool for thin-wall PIDG STRATO-THERM Terminals & Splices Qualified to BS 4G178 | 0.5 (22) |
| 576780 | Special GB Aerospace tool for thin-wall PIDG STRATO-THERM Terminals & Splices Qualified to BS 4G178 | 1.0 (18) |
| 576781 | Special GB Aerospace tool for thin-wall PIDG STRATO-THERM Terminals & Splices Qualified to BS 4G178 | 1.5 (16) |
| 59287-2 | PIDG, PLASTI-GRIP Large Expansion Terminals & Splices | 4.0 - 6.0 (12-10) (16-14) HD |
| 525692 | Special GB Aerospace PIDG & PLASTI-GRIP Ring Tongue Tool. Equivalent to 59239-4 but has special retaining pins/rings to reduce the risk of tool parts falling off whilst building and maintaining aircraft. | 4.0 - 6.0 (12-10) |
| 59239-4 | Standard Tool for PIDG & PLASTI-GRIP Terminals and Splices - GB Railways Qualifications: Mil-T-7928; LUL RSE 024 pt6 & EE6161 Marks the applied product with a one dot indent code. | 3.0 - 5.0 (12-10) 1.5 - 2.5 (16-14) HD Ins. Ø5.84mm max |
| 69322-1 | SOLISTRAND High Temp Parallel Splice | 0.4 - 6.0 (22-10) |
| 69355 | SOLISTRAND Terminals & Splices | 10.0 (8) |
| 59461 | STRATO-THERM Uninsulated Terminals & Splices with Insulation Support | 4.0 - 6.0 (12-10) (16-14) HD |
| 90382-2 | TYPE XII Contact | 1.5 - 4.0 (16-12) |
| 90384-1 | TYPE XII Contact | 6.0 - 10.0 (10-8) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

Heavy Head Hand Tool Battery Tool Kit

Convert your existing Hand Tools into Powered!

1901235-2 - Kit only without head

1901235-5 - Kit only without head (GB Power Plug)

Image representative of type only

Features:

Heads can be removed from many Heavy Head Hand Tools, example:
the Handles from 59239-4 can be removed and the head used with this kit.
See Instruction sheet 409-10068 for a list of compatible tools

Over 100 crimps per charge

Compact - only 360mm (14") long and weighs 1.57kg (3.48lbs)


The Tool Kit is supplied in a durable plastic carry case and includes:

Battery Tool with Heavy Head Adapter

Battery Charger 230 v

Two Batteries

for more information, please see the Power Assist section

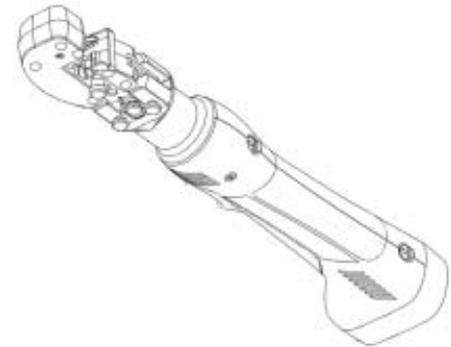

Adapter - Heavy Head to 626 Pneumatic

525432-1 - Adapter only

Features:

Heads can be removed from Hand Tools, example:
the Handles from 59239-4 can be removed and the head used with this Adapter on the 626 Pneumatic system.

Also required:

Adapter Holder with Ratchet 356304-1


or Adapter Holder without Ratchet 189928-1

and

Hand held power unit 189721-1

or Foot actuated Power Unit 189722-1

Image representative of type only

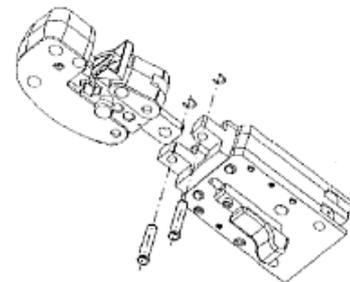

CERTI-LOK

169400 Base Tool without Die-set

Image representative of type only

Features:

- Interchangeable Dies
- Straight action jaw closure
- Ratchet mechanism ensures complete crimp cycle
- Easy access ratchet release
- Handle pressure adjustment with locking device
- Ergonomic non-slip handles
- Approximate weight 0.64 kg (1.4 lbs)



| Part Number | Description | mm ² (AWG) or other |
|-------------|---|--------------------------------|
| 656075-1 | Complete tool for LOCKING CLIP | 0.03 - 0.56 (32-20) |
| 169404 | Die-set for PIDG, PLASTI-GRIP Terminals & Splices Use in Hand Tool Frame 169400 GB Railways PIDG & PLASTI-GRIP Tool (Signal only) Meets; Mil-T 7928 F, VG 88720, DIN 41611 | 0.6 - 6.0 (20-10) |
| 169409 | Die-set for SOLISTRAND Terminals & Splices Use in Hand Tool Frame 169400 | 0.4 - 6.0 (22-10) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

Adapter - CERTI-LOK to Electric Terminator

169411 - Adapter only

Image representative of type only

Features:

Adapts the Electric Terminator to take CERTI-LOK Dies

for more information on the Press and Press options, please see the Power Assist section



Reel-Fed CERTI-LOK

A unique tool that applies terminals from special small reels

Features:

- Terminal feeding and cutting device
- Straight action jaw closure
- Ratchet mechanism ensures complete crimp cycle
- Easy access ratchet release
- Handle pressure adjustment with locking device
- Ergonomic non-slip handles

Image representative of type only



| Part Number | Description | mm ² (AWG) or other |
|-------------|--------------------------|--|
| 169424-1 | AMPLIMITE HD-20 | 0.08 - 0.56 (28-20) Ins. Ø0.76-1.52mm |
| 734643-1 | AMPLIVAR | |
| 734203-1 | AMPMODU IV | 0.12 - 0.14 (26) |
| 734204-1 | AMPMODU IV | 0.2 - 0.56 (24-20) |
| 734870-1 | MICRO MATCH COSI contact | 0.2 - 0.6 (24-20) |
| 734870-2 | MICRO MATCH COSI contact | 0.08 - 0.2 (28-24) |
| 539608-1 | MODU II | 0.02 - 0.20 (32-24) |
| 734216-1 | TYPE III+ | 0.2 - 1.5 (24-16) Ins. Ø1.1-2.5mm |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

PEZ 100

539717-1 - Base Tool without Die-set

1579000-1 - Base Tool without Die-set Long Handles

Image representative of type only

Features:

- Interchangeable Dies
- Flap type terminal locator
- Straight action jaw closure
- Ratchet mechanism ensures complete crimp cycle
- Easy access ratchet release
- Handle pressure adjustment with locking device
- Ergonomic non-slip handles



| Part Number | Description | mm ² (AWG) or other |
|-------------|--|--------------------------------------|
| 1579002-6 | PIDG STRATO-THERM | 0.2 - 0.4 (24-22) |
| 1579002-7 | PIDG STRATO-THERM | 1.0 - 2.5 (18-14) |
| 7-1579001-2 | POSITIVE-LOK | 0.35 - 0.75 (24-18) |
| 7-1579001-3 | POSITIVE-LOK | 0.5 - 0.75 (22-20) |
| 7-1579001-4 | Die-set for Ring Tongue (similar to DIN 46225) | 1.0 - 2.5 (18-14) Ins. Ø2.1-3.1mm |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

ERGOCRIMP

539635-1 Base Tool without Die-set

Image representative of type only

Note: This tool is not compatible with SDE Dies

Features:

- Interchangeable Dies
- Virtually a straight action jaw closure
- Ratchet mechanism ensures complete crimp cycle
- Easy access ratchet release
- Handle pressure adjustment with locking device
- Ergonomic non-slip handles
- Approximate weight 0.59 kg (1.3 lbs)



Spare parts Kit 539635-2 (excluding main spring)
Main Spring PN 1579005-1

| Part Number | Description | mm ² (AWG) or other |
|-------------|---------------------|--|
| 9-1579004-6 | MCON 2.8 Receptacle | 0.2 - 0.35 (24-22) Ins. Ø1.15-1.4mm |
| 9-1579004-8 | MCON 2.8 Receptacle | 1.5 - 2.5 (16-14) Ins. Ø2.2-3.0mm |
| 9-1579004-9 | MCON 2.8 Receptacle | 4.0 (12) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

Die-set - ERGOCRIMP


Widely used in the Automotive industry

Image representative of type only

Features:

Use in:
Hand Tool Frame 539635-1

1285003-1 - Head for the 626 Pneumatic System
1579000-7 - Adapter for Bench Top Press SSC- 2FP (1481004-7)
for more information please see the Power Assist section

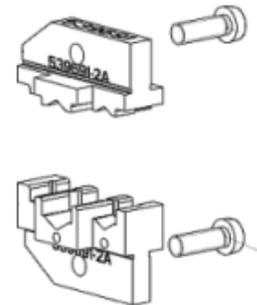

| Part Number | Description | mm ² (AWG) or other |
|-------------|----------------------------------|--------------------------------|
| 4-1579001-1 | AMP MCP 1.2-LL | 1.0 - 1.5 (18-16) |
| 4-1579001-2 | AMP MCP 1.2-LL | 0.5 - 0.75 (22-20) |
| 4-1579001-3 | AMP MCP 1.2-LL | 0.25 - 0.35 (24-22) |
| 4-1579001-4 | AMP MCP 1.2-LL | 0.14 - 0.22 (26-24) |
| 4-1579001-5 | AMP MCP 1.2-LL (SWS) | 1.0 - 1.5 (18-16) |
| 4-1579001-6 | AMP MCP 1.2-LL (SWS) | 0.75 - 1.0 (20-16) |
| 4-1579001-7 | AMP MCP 1.2-LL (SWS) | 0.2 - 0.35 (24-22) |
| 4-1579001-8 | AMP MCP 1.2-LL (SWS) | 0.14 - 0.22 (26-24) |
| 539950-2 | AMP MCP 1.5k; AMP MCP 1.5k (SWS) | 0.2 - 1.0 (24-18) |
| 539691-2 | PIDG, PLASTI-GRIP - All Types | 0.4 - 6.0 (22-10) |
| 6-1579001-6 | SOLARLOK | 1.5 - 6.0 (16-10) |
| 6-1579001-7 | SOLARLOK | 4.0 - 6.0 (12-10) |
| 539662-2 | SOLISTRAND Terminals & Splices | 0.3 - 6.6 (24-10) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

Tetra-Crimp Hand Tool

58078-3 - Base Tool without Die-set

Features:

Interchangeable Dies
 Ratchet mechanism ensures complete crimp cycle
 Tamper proof ratchet release setting
 Emergency ratchet release feature
 Terminal locator / support and wire stop on many tools
 Approximate weight 0.64 kg (1.4 lbs)
 Ergonomic non-slip handles

Image representative of type only



| Part Number | Description | mm ² (AWG) or other |
|-------------|---|--------------------------------|
| 59824-1 | Complete Tool for PIDG, PLASTI-GRIP Terminals & Splices Meets UL requirements | 0.4 - 6.0 (22-10) |
| 58052-3 | Die-set for ULTRA FAST Use In Hand Tool Frame 58078-3 | 0.15 - 0.4 (26-22) |
| 90390-3 | Die-set for ULTRA FAST (including Flag Terminals) Use In Hand Tool Frame 58078-3 | 0.4 - 1.0 (22-18) |
| 90391-3 | Die-set for ULTRA FAST (including Flag Terminals) Use In Hand Tool Frame 58078-3 | 1.5 - 2.5 (16-14) |
| 58079-3 | Die-set for ULTRA FAST PLUS Use In Hand Tool Frame 58078-3 | 0.4 - 1.0 (22-18) |
| 58080-3 | Die-set for ULTRA FAST PLUS Use In Hand Tool Frame 58078-3 | 1.5 - 2.5 (16-14) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

Mini CERTI-LOK

A light weight and compact tool for many commercial applications

Image representative of type only

Features:

- Fixed dies
- Straight action jaw closure
- Ratchet mechanism ensures complete crimp cycle
- Easy access ratchet release
- Handle pressure adjustment with locking device
- Easy terminal positioning with 'Flap Locator' (some tools)
- Ergonomic non-slip handles
- Approximate weight 0.46 kg (1.0 lbs)



| Part Number | Description | mm ² (AWG) or other |
|-------------|--|--|
| 1579004-2 | 110 FASTIN-ON | 0.5 - 1.5 (22-16) |
| 169341-1 | AMPLIMITE HD-20 (Spare Terminal Locator 4-539785-7) | 0.03 - 0.56 (32-20) Ins. Ø0.5-1.5mm |
| 734360-1 | AMPLIMITE HD-22 | 0.08 - 0.4 (28-22) |
| 169481-1 | AMPMODU IV (Spare Terminal Locator 4-539785-8) | 0.03 - 0.56 (32-20) Ins. Ø0.5-1.4mm |
| 734202-1 | Mini-Universal MATE-N-LOK | 0.4 - 1.0 (22-18) |
| 734218-1 | MODULAR PLUG | 4 Posn |
| 734218-2 | MODULAR PLUG | 6 Posn |
| 734218-3 | MODULAR PLUG | 8 Posn |
| 734218-4 | MODULAR PLUG | 6 Posn off-set |
| 539645-1 | MQS Ø1.0mm | 0.35 - 0.5 (24-22) |
| 169994-1 | POSITIVE-LOK 4.8 mm | 0.2 - 0.6 (24-20) |
| 169481-2 | TANDEM-SPRING (Spare Terminal Locator 4-539785-9) | 0.03 - 0.56 (32-22) |
| 169480-1 | TYPE 'F' Crimp-on Snap-in | 0.05 - 1.5 (30-16) |
| 169475-1 | TYPE III+ | 0.03 - 0.56 (32-20) |
| 169422-1 | TYPE III+; CI-2 Socket | 0.75 - 2.5 (20-14) Ins. Ø2.0-3.8mm |
| 1579004-4 | Wire End Ferrules | 0.08 - 10.0 (28-8) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

Modular Mini CERTI-LOK

Based on the Mini Certi-Lok tool
 2-1579005-1 Short handle assembly
 2-1579005-2 Long handle assembly

Image representative of type only

Features:

Heads with identical features to the Mini Certilok tool

Choice of two handle lengths:

2-1579005-1 Short Handle
 2-1579005-2 long Handle

Interchangerbility via snap-in pins.



| Part Number | Description | mm ² (AWG) or other |
|-------------|--|--------------------------------|
| 2-1579021-8 | Head only for 4.2mm PE Series | 0.15 - 1.0 (26-18) |
| 1579001-8 | Head only for FFC to MQS | 0.35 - 0.5 (24-22) |
| 5-1579001-8 | Complete tool for MQS (SWS) | 0.5 - 0.75 (22-20) |
| 1579001-9 | Head only for Pin/Socket Ø2.5 | 1.5 - 2.5 (16-14) |
| 7-1579001-8 | Head only for SOLARLOK | 1.5 - 2.5 (16-14) |
| 7-1579001-9 | Head only for SOLARLOK | 4.0 - 6.0 (12-10) |
| 1-1579004-1 | Complete tool for SOLARLOK with Long Handle assembly | 1.5 - 2.5 (16-14) |
| 1-1579004-2 | Complete tool for SOLARLOK with Long Handle assembly | 4.0 - 6.0 (12-10) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

C-Frame Hand Tool

6-1419172-9 - Base Tool without Die-set

Image representative of type only

Features:

Interchangeable Dies
 Double action jaw closure
 Ratchet mechanism ensures complete crimp cycle
 Easy access ratchet release
 Handle pressure adjustment with locking device
 Egonomic non-slip handles
 Approximate weight 0.55 kg (1.2 lbs)



| Part Number | Description | mm ² (AWG) or other |
|-------------|---|--------------------------------|
| 1583684-1 | Die-set for ADK Series Back Shell Use in Hand Tool frame 6-1419172-9 | 6.0 mm Cable Dia Max |
| 1583684-2 | Die-set for ADK Series Back Shell Use in Hand Tool frame 6-1419172-9 | 7.5 mm Cable Dia Max |
| 1583684-3 | Die-set for ADK Series Back Shell Use in Hand Tool frame 6-1419172-9 | 8.5 mm Cable Dia Max |
| 1583684-4 | Die-set for ADK Series Back Shell Use in Hand Tool frame 6-1419172-9 | 9.5 mm Cable Dia Max |
| 948761-2 | Complete tool for HDE 20 Ferrule | 9-15-25 WAY 8.2MM I/D |
| 948761-1 | Complete tool for HDE20 Ferrule | 9-15-25 WAY 6.25MM I/D |
| 948761-3 | Complete tool for HDE20 Ferrule | 9-15-25 WAY 9.5MM I/D |
| 734566-1 | Complete tool for N Series 50 & 70 ohm | |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

D-Frame Tool

Image representative of type only

Features:

- Fixed Die-sets
- Small and lightweight
- Ratchet mechanism ensures complete crimp cycle
- Easy access ratchet release
- Handle pressure adjustment with locking device
- Ergonomic non-slip handles
- Approximate weight 0.55 kg (1.2 lbs)



| Part Number | Description | mm ² (AWG) or other |
|-------------|--|--------------------------------|
| 947488-1 | Coax - BNC, TNC | Cable Dia 5 & 6mm |
| 947679-1 | HE 13 / 14 Crimp-on Snap-in | 0.08 - 0.2 (28-24) |
| 2-1579002-0 | Wire Wire End Ferrules (Square crimp form) | 0.5 - 6.0 (22-10) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

Trapezium Crimp Tool

Special Trapezium crimp tool for Wire End Ferrule applications

Image representative of type only

Features:

- Ratchet mechanism ensures complete crimp cycle
- Easy access ratchet release
- Handle pressure adjustment with locking device
- Ergonomic non-slip handles



| Part Number | Description | mm ² (AWG) or other |
|-------------|--|--------------------------------|
| 734641-2 | Wire End Ferrules (trapezium crimp form) | 0.14 - 6.0 (26-10) |
| 734641-3 | Wire End Ferrules (trapezium crimp form) | 0.5 - 10 (22-6) |
| 734641-4 | Wire End Ferrules (trapezium crimp form) | 10.0 - 16.0 (8-6) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

Square Crimp Tool

Special Square crimp tool for Wire End Ferrule applications

Image representative of type only

Features:

- Ratchet mechanism ensures complete crimp cycle
- Easy access ratchet release
- Handle pressure adjustment with locking device
- Ergonomic non-slip handles



| Part Number | Description | mm ² (AWG) or other |
|-------------|--|--------------------------------|
| 539660-1 | Wire Wire End Ferrules (square crimp form) | 0.08 - 6.0 (28-10) |
| 539661-1 | Wire Wire End Ferrules (square crimp form) | 0.75 - 10 (20-8) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

Service Tool

734790-1 - Base Tool without Die-set

Image representative of type only

Features:

- Interchangeable Dies
- Ratchet mechanism ensures complete crimp cycle
- Easy access ratchet release
- Handle pressure adjustment with locking device
- Ergonomic non-slip handles
- Approximate weight 0.59 kg (1.3 lbs)



| Part Number | Description | mm ² (AWG) or other |
|-------------|--|--------------------------------|
| 1-1579004-5 | Complete tool for FASTON; FASTIN-FASTON | 0.1 - 6.0 (18-10) |
| 2-1579021-3 | Complete tool for FASTON; FASTIN-FASTON Use in Hand Tool 734790-1 | 0.5 - 6.0 (22-10) |
| 734767-1 | Micro TIMER I; Junior Power-TIMER 2.8 (SWS); CI-2 Use in Hand Tool 734790-1 | 0.5 - 2.5 (22-14) |
| 1-1579004-4 | Complete tool for PIDG, PLASTI-GRIP - All Types | 0.5 - 6.0 (22-10) |
| 2-1579021-2 | Die-set for PIDG, PLASTI-GRIP - RBY all types Use in Hand Tool 734790-1 | 0.5 - 6.0 (22-10) |
| 734768-1 | Pin / Socket Ø1.5 (SWS) Use in Hand Tool 734790-1 | 0.5 - 2.5 (22-14) |
| 1-1579004-6 | Complete tool for SOLISTRAND Terminals & Splices | 0.08 - 10.0 (28-8) |
| 2-1579021-4 | Die-set for SOLISTRAND Terminals & Splices Use in Hand Tool 734790-1 | 0.5 - 6.0 (22-10) |
| 734658-1 | Complete Tool for Wire End Ferrules | 25.0 - 35.0 (4-2) |
| 734658-2 | Complete Tool for Wire End Ferrules | 50 (1/0) |
| 790081-2 | Complete Tool for Wire End Ferrules | 6.0 - 16.0 (10-6) |
| 1-1579004-7 | Complete Tool for Wire End Ferrules DIN 46228 | 0.14 - 6.0 (26-10) |
| 2-1579021-5 | Die-set for Wire End Ferrules DIN 46228 Use in Hand Tool 734790-1 | 0.14 - 6.0 (26-10) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.

TERMI-POINT Hand Tool

Features:

Pneumatic options (pictured)
Interchangeable Mandrels
Terminals fed from Reel

Image representative of type only



| Part Number | Description | mm ² (AWG) or other |
|-------------|--|--------------------------------|
| 655032-1 | Maxi TERM-POINT | 0.2 - 0.56 (24-20) |
| 655136-3 | STD TERM-POINT | 0.2 - 0.4 (24-22) |
| 1-69411-3 | Mandrel (red) for 69526-1 - Ins. Range Ø1.10 - 1.65 mm | 0.2 (24) |
| 1-69411-4 | Mandrel (orange) for 69526-1 - Ins. Range Ø1.14 - 1.65 mm | 0.4 (22) |
| 1-69411-9 | Mandrel (brown) for 69526-1 - Ins. Range Ø1.14 - 1.65 mm | 0.15 (26) |
| 69526-2 | Hand Tool without Mandrel | 0.08 - 0.4 (28-22) |
| 69551-5 | Mandrel (black) for 69526-1 - Ins. Range Ø1.14 - 1.65 mm | 0.08 (28) |
| 69551-6 | Mandrel (brown) for 69526-1 - Ins. Range Ø0.56 - 1.14 mm | 0.15 (26) |
| 69551-8 | Mandrel (orange) for 69526-1 - Ins. Range Ø0.87 - 1.23 mm | 0.4 (22) |
| 69551-9 | Mandrel (red) for 69526-1 - Ins. Range Ø0.74 - 1.23 mm | 0.2 (24) |
| 69561 | Mandrel (yellow) for 654182-1 - Ins. Range Ø1.17 - 1.65 mm | 0.56 (22) |
| 69561-1 | Mandrel (yellow) for 654182-1 - Ins. Range Ø1.68 - 2.16 mm | 0.56 (22) |
| 69561-4 | Mandrel (red) for 654182-1 - Ins. Range Ø1.17 - 1.65 mm | 0.2 (24) |
| 654182-1 | Hand Tool without Mandrel | 0.6 - 0.2 (20-24) |
| 871087-1 | Hand Tool (pneumatic) without Mandrel | 0.6 - 0.2 (20-24) |
| 871087-2 | Hand Tool (pneumatic) without Mandrel | 0.4 - 0.15 (22-26) |
| 871295-1 | Mandrel (yellow) for 871087-1 - Ins. Range Ø0.91 - 1.65 mm | 0.56 (22) |
| 871295-2 | Mandrel (red) for 871087-1 - Ins. Range Ø0.86 - 1.65 mm | 0.2 (24) |
| 871295-3 | Mandrel (orange) for 871087-2 - Ins. Range Ø0.91 - 1.65 mm | 0.4 (22) |
| 871295-4 | Mandrel (red) for 871087-2 - Ins. Range Ø0.86 - 1.65 mm | 0.2 (24) |
| 871295-5 | Mandrel (brown) for 871087-2 - Ins. Range Ø0.76 - 1.40 mm | 0.15 (26) |

Only the most popular options are listed here, please use our online search by terminal PN to find the right tool for your application, and contact us where information is unclear or missing - there may well be something available for your requirement.