


CGJ3E2X7R1E103K080AA (TDK item description : CGJ3E2X7R1E103KT****)

Applications  High Reliability Grade

Feature  General (Up to 50V)
 AEC-Q200

Series CGJ3(1608) [EIA CC0603]

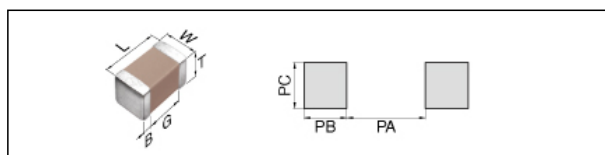







Size	
Length(L)	1.60mm +/-0.10mm
Width(W)	0.80mm +/-0.10mm
Thickness(T)	0.80mm +/-0.10mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	0.30mm Min.
Recommended Land Pattern(PA)	0.70 to 1.00mm (Flow Soldering) 0.60 to 0.80mm (Reflow Soldering)
Recommended Land Pattern(PB)	0.80 to 1.00mm (Flow Soldering) 0.60 to 0.80mm (Reflow Soldering)
Recommended Land Pattern(PC)	0.60 to 0.80mm (Flow Soldering) 0.60 to 0.80mm (Reflow Soldering)
Recommended Slit Pattern(SD)	

Electrical Characteristics	
Capacitance	10nF +/-10%
Rated Voltage	25Vdc
Temperature Characteristic	X7R(+/-15%)
Dissipation Factor	3% Max.
Insulation Resistance	10000MΩ Min.

Other	
Soldering Method	Reflow, Flow
AEC Q200	Yes
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.

CGJ3E2X7R1E103K080AA

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

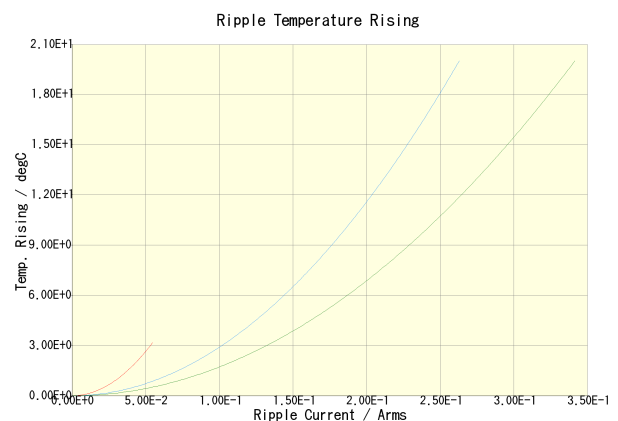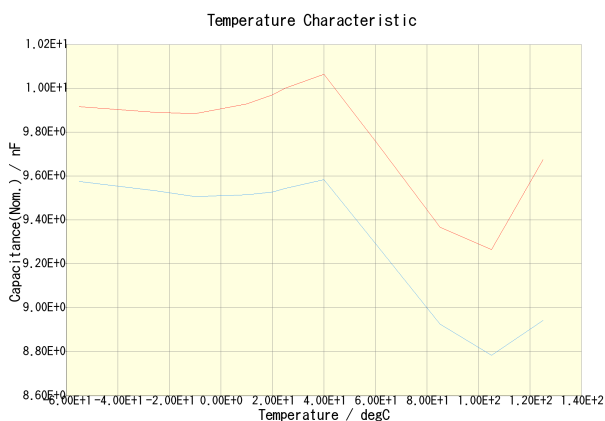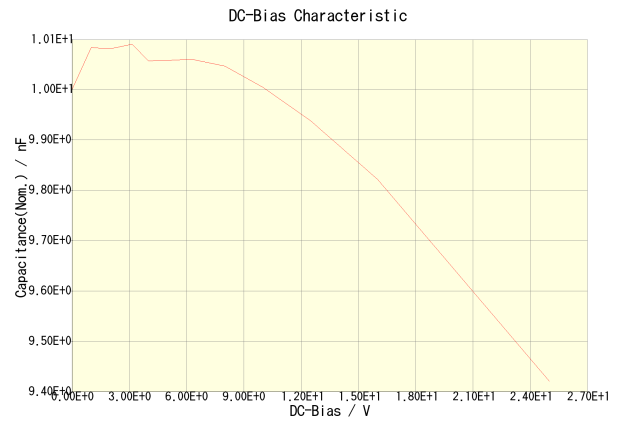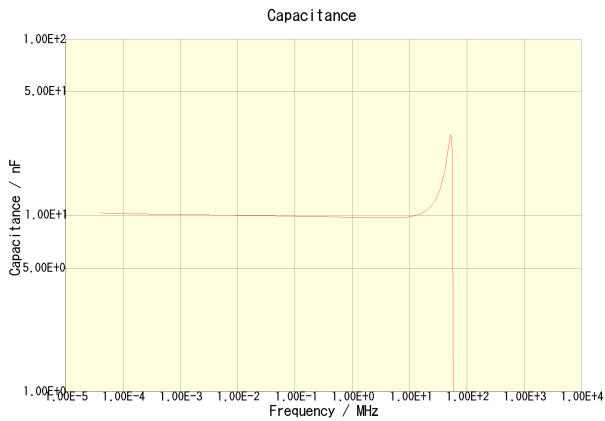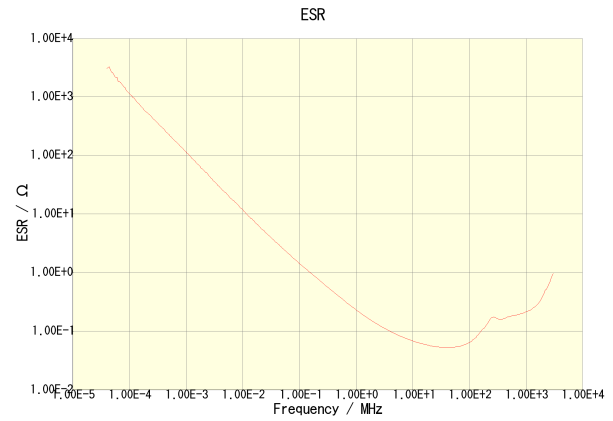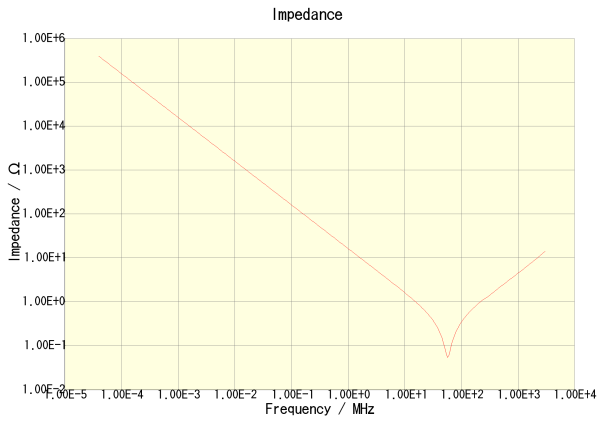

CGJ3E2X7R1E103K080AA(DC Bias = 0V)

CGJ3E2X7R1E103K080AA(DC Bias = 12.5V)

CGJ3E2X7R1E103K080AA(100kHz)

CGJ3E2X7R1E103K080AA(500kHz)

CGJ3E2X7R1E103K080AA(1MHz)