




C2012X7R2A102K085AA (TDK item description : C2012X7R2A102KT****)

Applications	 Commercial Grade
	 Please refer to Part No. CGA4F2X7R2A102K085AA for automotive use.
Feature	Mid Mid Voltage (100 to 630V)
Series	C2012 [EIA CC0805]



Size	
Length(L)	2.00mm +/-0.20mm
Width(W)	1.25mm +/-0.20mm
Thickness(T)	0.85mm +/-0.15mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	0.50mm Min.
Recommended Land Pattern(PA)	1.00 to 1.30mm (Flow Soldering) 0.90 to 1.20mm (Reflow Soldering)
Recommended Land Pattern(PB)	1.00 to 1.20mm (Flow Soldering) 0.70 to 0.90mm (Reflow Soldering)
Recommended Land Pattern(PC)	0.80 to 1.10mm (Flow Soldering) 0.90 to 1.20mm (Reflow Soldering)
Recommended Slit Pattern(SD)	

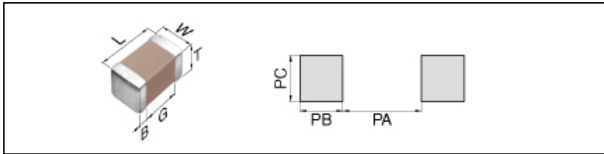Electrical Characteristics	
Capacitance	1nF +/-10%
Rated Voltage	100Vdc
Temperature Characteristic	X7R(+/-15%)
Dissipation Factor	3% Max.
Insulation Resistance	10000MΩ Min.

Other	
Soldering Method	Reflow, Flow
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

C2012X7R2A102K085AA


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)




C2012X7R2A102K085AA

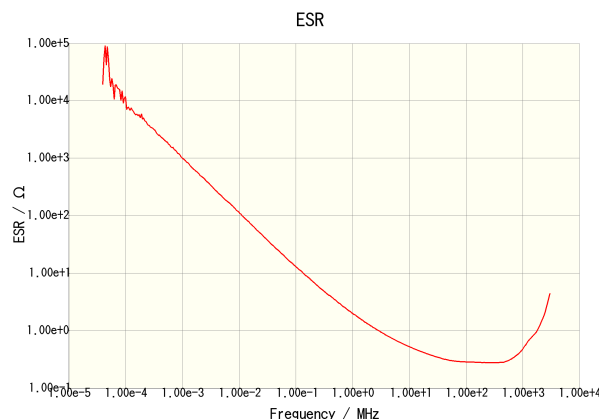


C2012X7R2A102K085AA

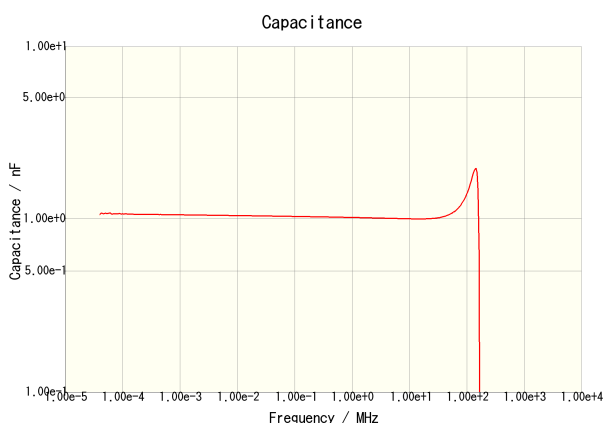


C2012X7R2A102K085AA

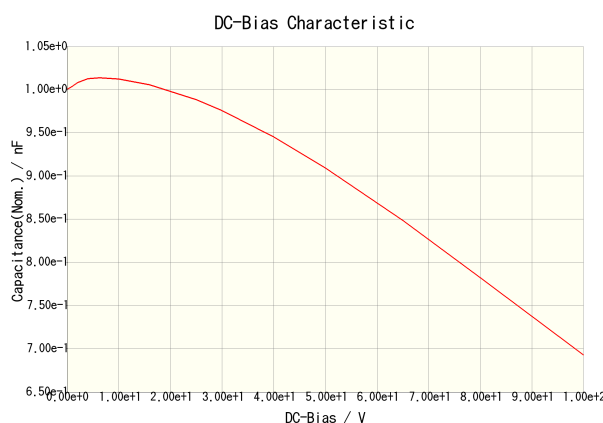

C2012X7R2A102K085AA

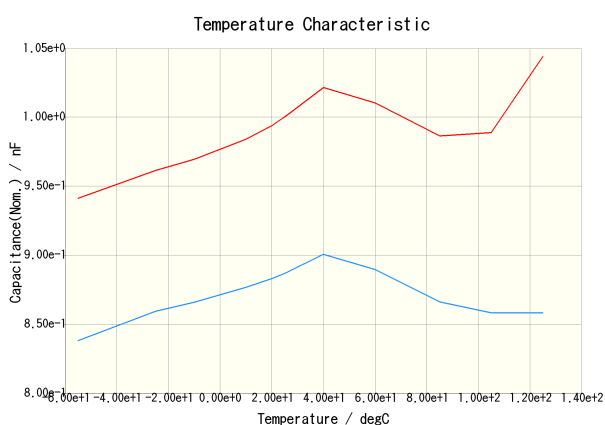

C2012X7R2A102K085AA(DC Bias = 0V) C2012X7R2A102K085AA(DC Bias = 50V)

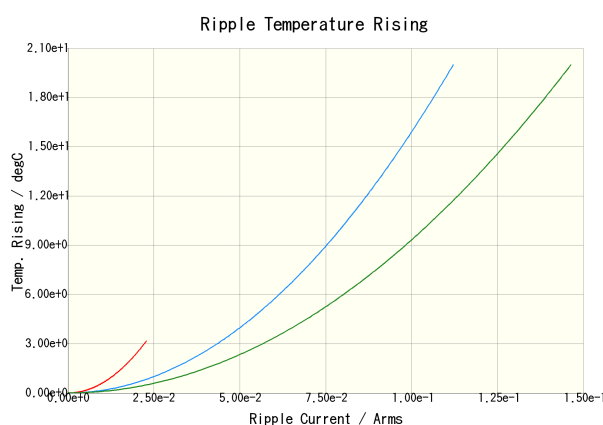

C2012X7R2A102K085AA(100kHz) C2012X7R2A102K085AA(500kHz)
C2012X7R2A102K085AA(1MHz)

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.