




LOC	DIST	REV	DESCRIPTION	DATE	DMN	APVD
G	14	P	LTR			
		J2	REVISED PER ECO-11-005027	11MAR11	RK	HMR

AMP WIRE RANGE	 Listed FILE E13288	 LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

- 1 STAMP 6SAMP 16-14* APPROX AS SHOWN
- 2. WIRE INSUL DIA, 3.00-4.90 [.118-.193]
- 3. TONGUE MATL THK, 0.79±0.05 [.031±.002]
- 4 MATERIAL: BODY - PH BRZ PER ASTM B-36
SLEEVE - PVC, COLOR - BLUE

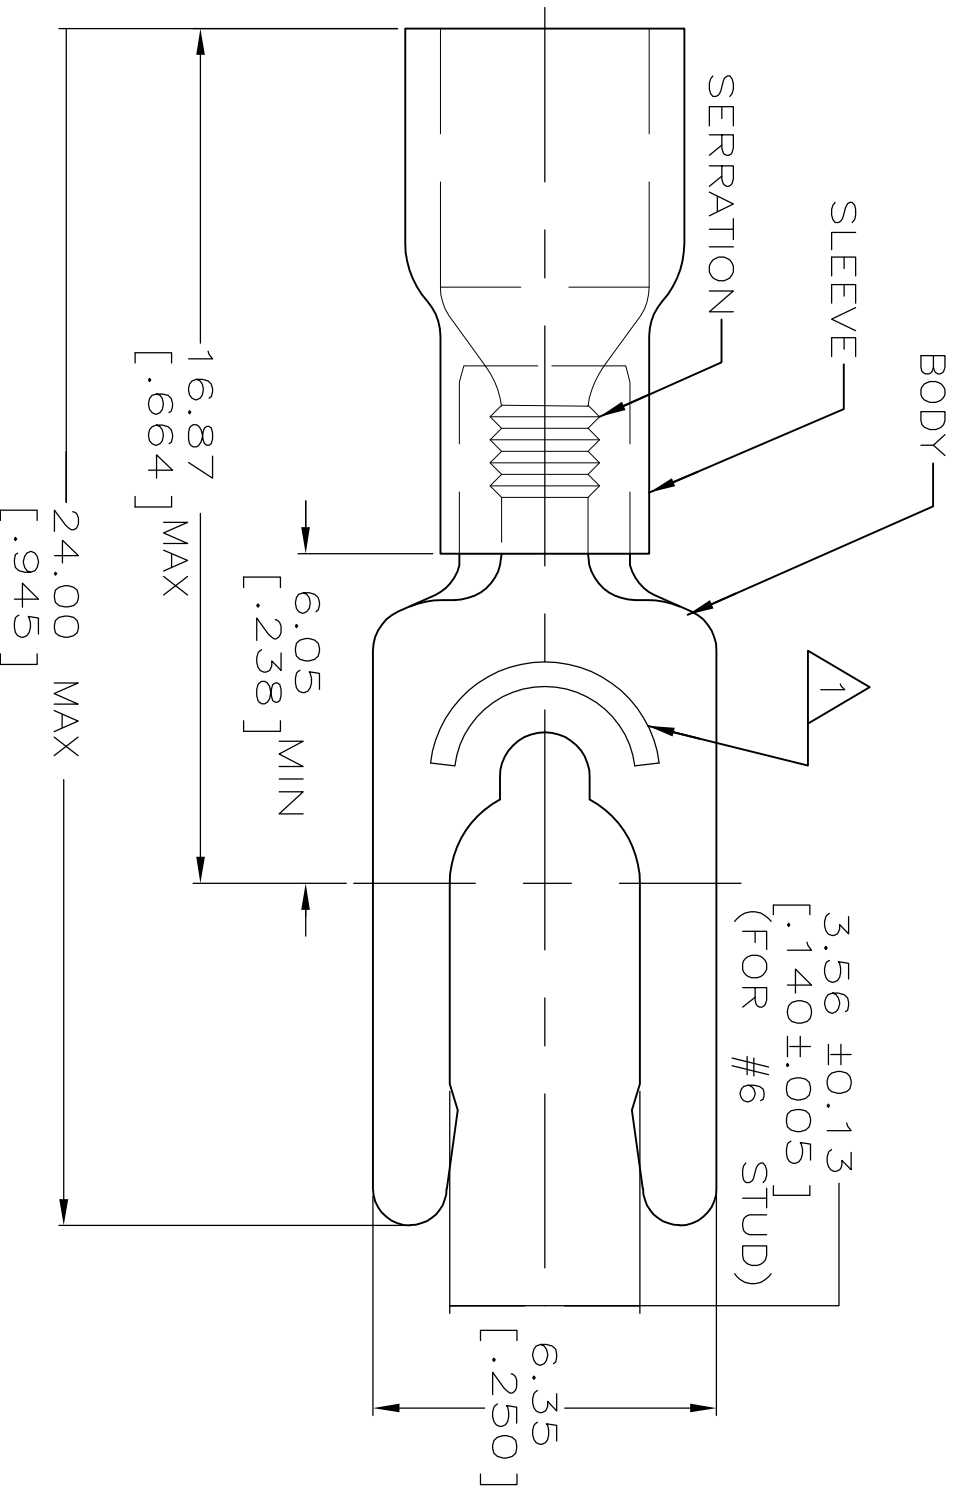

100	LOOSE PIECE, BOX	8-52463-1
5000	ON TAPE, REEL	52463-1
1000	LOOSE PIECE	52463
QTY	PACKAGE TYPE	PART NO



TERMINAL, SPRING SPADE,
LONG, PLASTI-GRIP,
WIRE SIZE: 16-14

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS
 1-800-522-6752


FOR APPLICATION TOOLS INFORMATION CENTER
 1-800-722-1111

FOR ORDER ENTRY 1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT.

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221° F]

VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)
 CIRCULAR MIL AREA: 1.04-2.62mm²[2.050-5.180]
 SOLID OR STRANDED



MATERIAL: TIN PER ASTM B545

DMN: 26JUN95
 L: OLMEDA
 CHK: M ELLIS
 APVD: G NGO
 PRODUCT SPEC: UL 486A
 APPLICATION SPEC: -
 WEIGHT: -

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± 0.20 [.008]
 3 PLC ± -
 4 PLC ± -
 FINISH ± -
 TIN PER ASTM B545

NAME: A3

CUSTOMER DRAWING

SIZE: A3
 CAGE CODE: 00779
 DRAWING NO: 52463
 SCALE: 6:1
 SHEET: 1 of 1
 REV: J2