

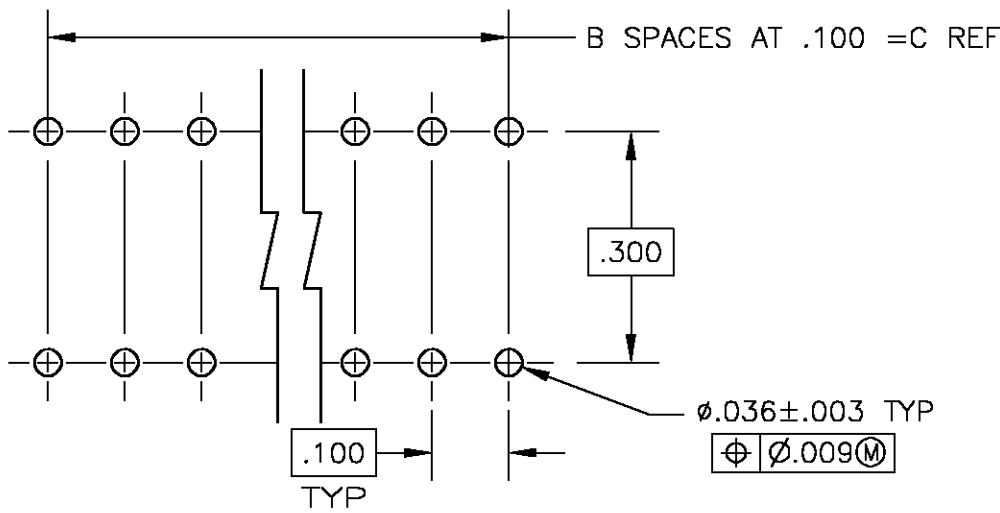
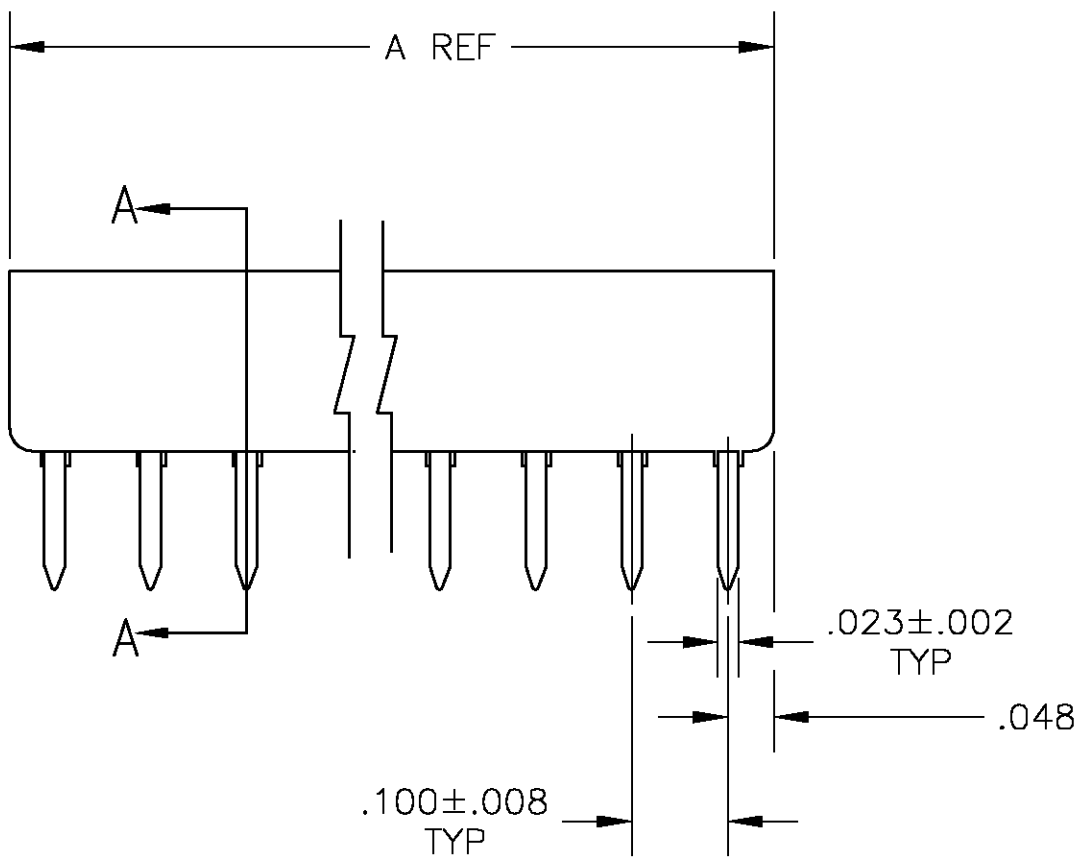



LOC		DIST		REVISIONS					
AD		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	REV PER OG3C-0113-05			29JUN05	RB	KD

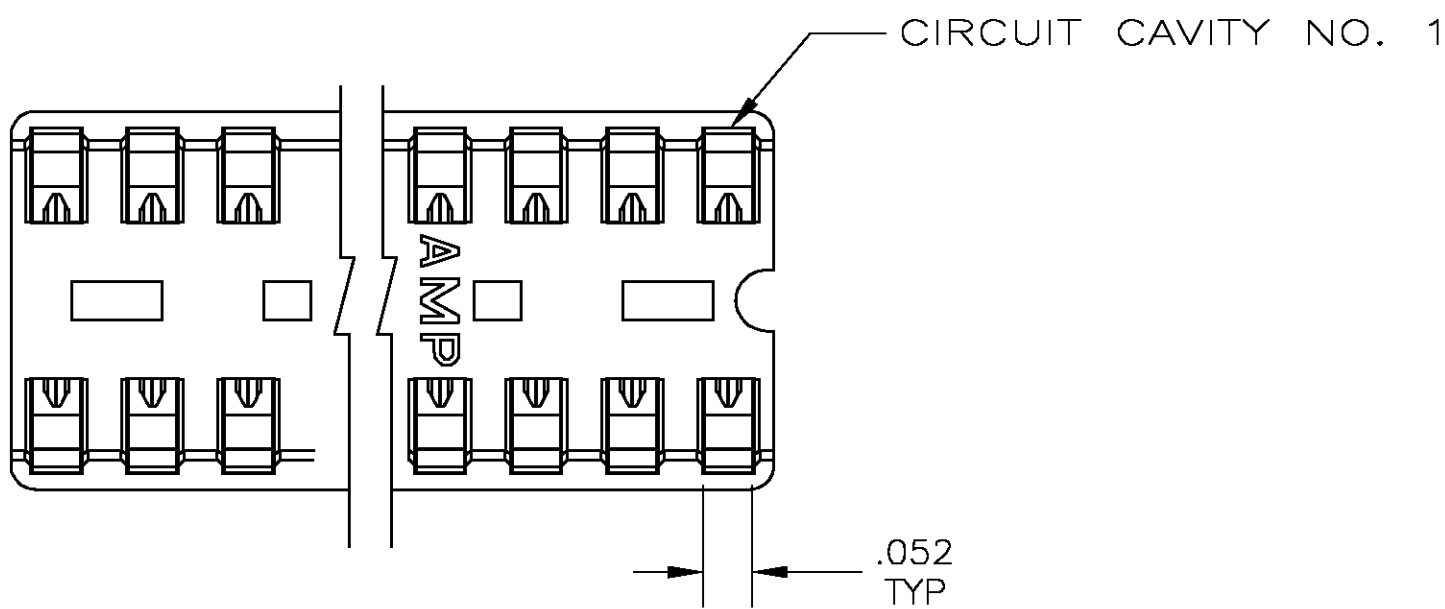

RECOMMENDED MOUNTING HOLE PATTERN
SCALE 4:1

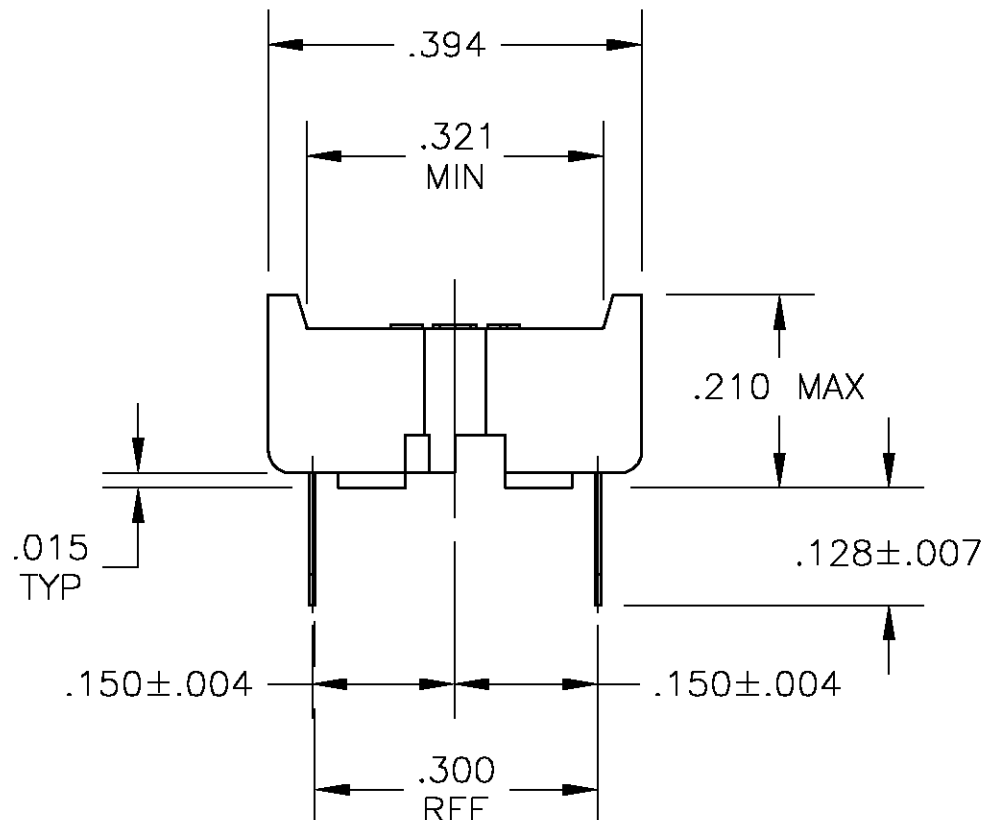

1. RECEPTACLE ACCEPTS A .008-.014 THICK I.C. LEAD.
2. TUBE LOADED FOR AUTOMATIC INSERTION.
3. BECU CONTACT-PLATED WITH TWO .000030 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
4. PHOS. BRONZE CONTACT- PLATED WITH TWO .000015 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
5. MAXIMUM DIMENSION FOR I.C. SEATING PLANE.
6. HOUSING MATERIAL-GLASS FILLED THERMOPLASTIC, BLACK, 94V-0

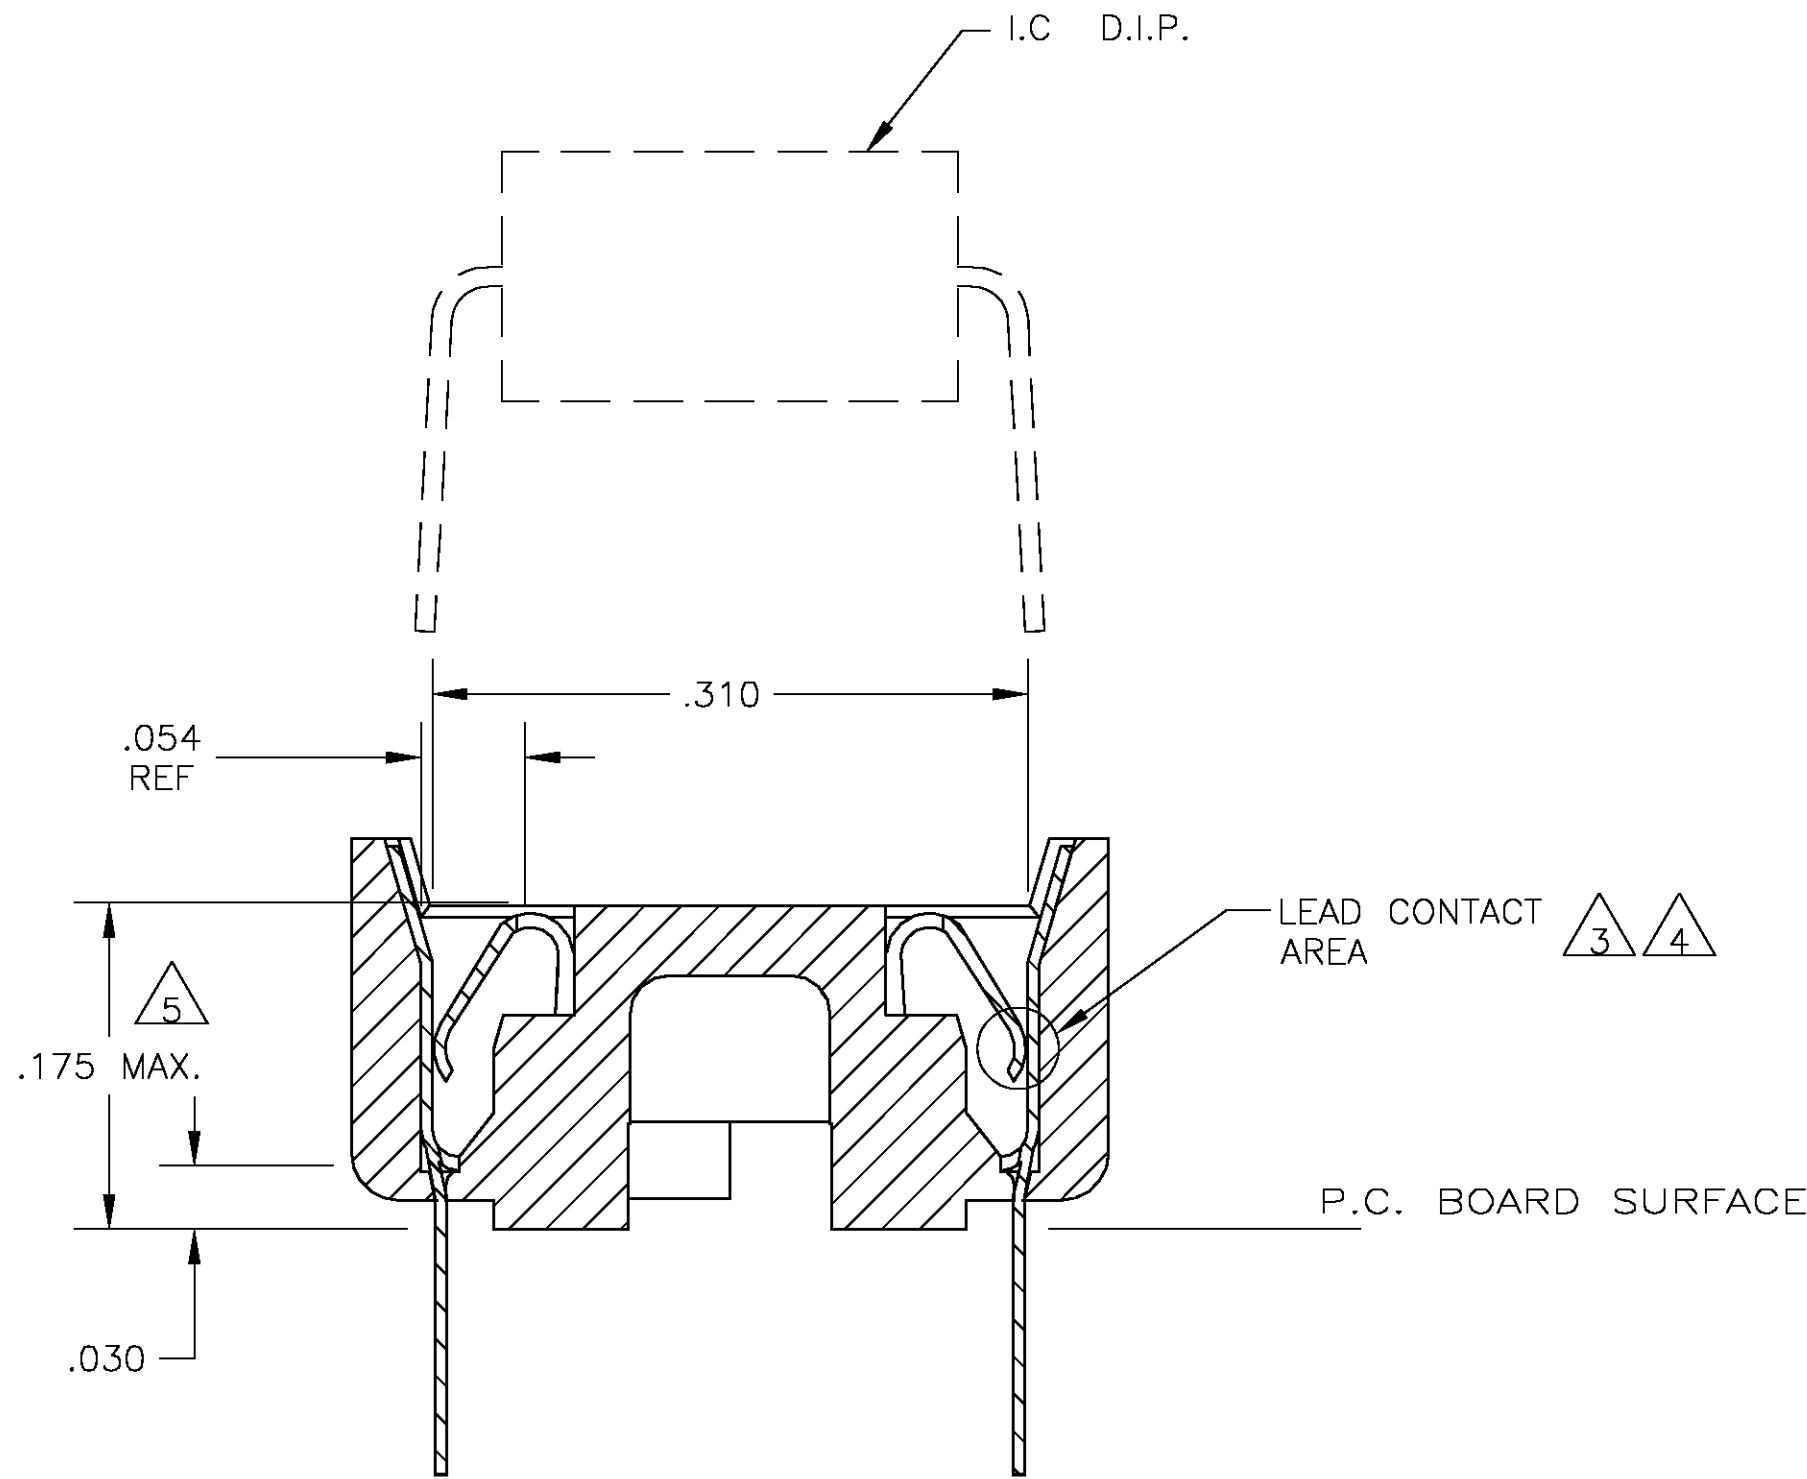

SECTION A-A
SCALE 10:1

5	.900	9	.995	20	1-1825093-6	
5	.800	8	.895	18	1-1825093-5	
5	.700	7	.795	16	1-1825093-4	
5	.600	6	.695	14	1-1825093-3	
5	.300	3	.395	8	1-1825093-2	
5	.200	2	.295	6	1-1825093-1	
4	.900	9	.995	20	1825093-6	
4	.800	8	.895	18	1825093-5	
4	.700	7	.795	16	1825093-4	
4	.600	6	.695	14	1825093-3	
4	.300	3	.395	8	1825093-2	
4	.200	2	.295	6	1825093-1	
CONTACT & FINISH		DIM C	B SPCS	DIM A	POSITION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN B.S.VISWESWARA	20APR2005	Tyco Electronics Corporation Harriaburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK K.WRIGHT	APVD	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		DIP SOCKET ASSY, CLOSED, DIPLOMATE, .300 CL, LEAD FREE	
0 PLC ± -		APPLICATION SPEC		RESTRICTED TO	
1 PLC ± -		WEIGHT		A1 00779 C=1825093	
2 PLC ± -		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV A	
3 PLC ± -					
4 PLC ± -					
ANGLES ± -					
FINISH					