



# Connectivity Solutions

Complete or Partial Part #,  
Competitor Part # or  
Keywords.

Wireless

CATV

Audio &amp; Video

Networking &  
Structured Wiring

Military &amp; Aerospace

Test &amp; Measurement

[Home](#)[Member Access](#)[Products](#)[Connectors](#)[Microwave Components](#)[CATV Components](#)[Coaxial Cable Assemblies](#)[Structured Cabling & Connectors](#)[Tools & Accessories](#)[Customer Service](#)[Request For Quote](#)[Representatives](#)[Distributors](#)[Literature/Catalog Request](#)[What's New](#)[About Our Brands](#)[Legal Terms](#)[© 2007 All Rights Reserved](#)

## Product Detail



<b>Product Line:</b>	<a href="#">Johnson</a> (Click for customer service)
<b>Part Number:</b>	108-0307-001
<b>Description:</b>	Banana Plug - Insulated Solderless Tapered Handle
<b>Product Family:</b>	BANANA PLUG
<b>Body Material:</b>	Brass per QQ-B-626D
<b>Breakdown Voltage:</b>	3500 Vrms min.
<b>Color / Finish:</b>	Yellow
<b>Contact Finish:</b>	Nickel
<b>Contact Termination:</b>	Solder
<b>Current:</b>	15 amps
<b>Desc 2:</b>	Tapered Handle
<b>Description:</b>	Insulated Solderless
<b>For Use With:</b>	.166 (4.23) Banana Jack
<b>RoHS Compliant:</b>	Yes

20070523-1523

# Banana Plug - Insulated Solderless Tapered Handle

## SPECIFICATIONS

**Plug Body:** Brass per QQ-B-626D

**Plug Spring:** Nickel silver per QQ-C-533

**Finish:** Nickel



**Insulated Handle:** Nylon 6/6 per ASTM D4066

## RATINGS

**Current:** 15 amps

**Breakdown Voltage:** 3500 Vrms minimum =

**Contact Resistance:** 0.010 ohms maximum

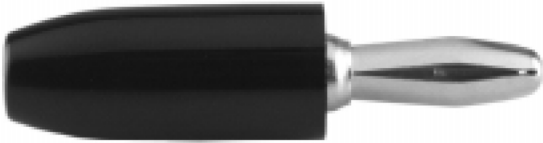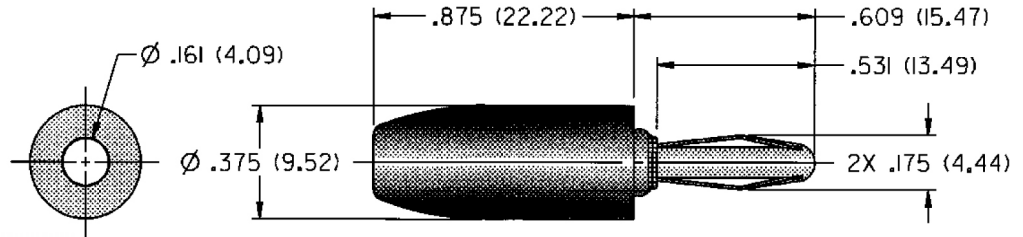

<b>NICKEL PLATING</b>
108-0307-001 Yellow

**For Standard Banana Jack: .166 (4.23) Diameter**

## FEATURES:

- Fast solderless connection of up to 16 gauge wire
- Recessed plug body to limit shock hazard
- Nylon UL approved for self extinguishing