

SPRING-LOADED  
CONNECTORS

PCB CONNECTORS

DIL / SIL / TO  
SOCKETSPGA / BGA / PLCC  
SOCKETSSCREW-MACHINED  
CONTACTS

CUSTOM DESIGN

## PGA / BGA / PLCC - PLCC SOLDER TAIL



&lt;&lt; Back To Search Results

Series  
540PGA / BGA / PLCC - PLCC solder tail  
PLCC  
Socket for Plastic Leaded Chip Carrier (PLCC),  
Solder tailPLCC sockets, solder tail, with precision stamped  
contacts providing component retention thanks to  
positive spring action.

## Technical specs.:

Insulator:	Glass filled thermoplastic PPS-GF40-FR
Flammability:	UL 94V-O
Contact:	Phosphor bronze
Mechanical life:	Min. 25 cycles
Rated current:	1 A
Contact resistance:	Max. 30 m $\Omega$
Dielectric strength:	Min. 500 V RMS
Insulation resistance:	Min. 1000 M $\Omega$
Capacitance:	Max. 1 pF

## Dimensions

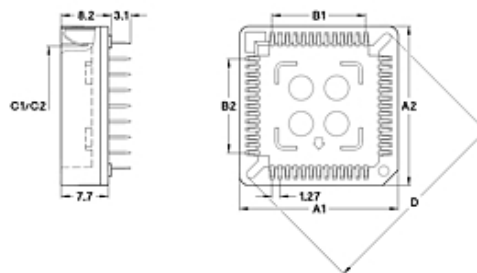

## Ordering information RoHS-compliant parts

PP Plating code Sleeve Clip  
88 Tin Tin

## General technical specs. ...

No of poles	A1/A2	B1/B2	C1/C2	D	E	Order Codes
28	18.09	7.62	11.2	22.12		540-88-028-24-008
32	18.04/20.06	7.62/10.16	11.2/13.6	23.12		540-88-032-24-008
44	23.1	12.7	16.2	29.12		540-88-044-24-008
52	25.7	15.24	18.8	32.85		540-88-052-24-008
68	30.8	20.32	23.7	39.9		540-88-068-24-008
84	35.95	25.4	28.9	47.4		540-88-084-24-008

Home

About Us

Products

Technical Assistance

Distributors &amp; Reps

Distributors Login

Contact Us

Job Opportunities

Newsletters

## NEWS

[January 2010] **ARROW CENTRAL EUROPE** has been appointed as New Distributor Partner.  
More >>

[January 2010] **New Sales and Marketing Director**