

DIL - SOLDER TAIL ULTRALOW / VERY LOW PROFILE

<< Back To Search Results


Series
115

DIL - Solder tail ultralow / very low profile
2.54 mm, Solder tail, Ultralow and very low
profile

"Ultralow" sockets have specially designed contacts for
reduced socket above PCB.

Technical specs.:


Insulator:	Black glass filled polyester PCT-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass CuZn36Pb3 (C36000)
Contact:	Clip (4 finger): Beryllium copper (C17200)
Accepted pin Ø:	0.40 to 0.52 mm
Insertion force:	3 N typ.
Withdrawal force:	1.5 N typ. (polished steel gauge Ø 0.43 mm)
Mechanical life:	Min. 100 cycles
Rated current:	1 A
Contact resistance:	Max. 10 mΩ
Dielectric strength:	Min. 1000 V RMS

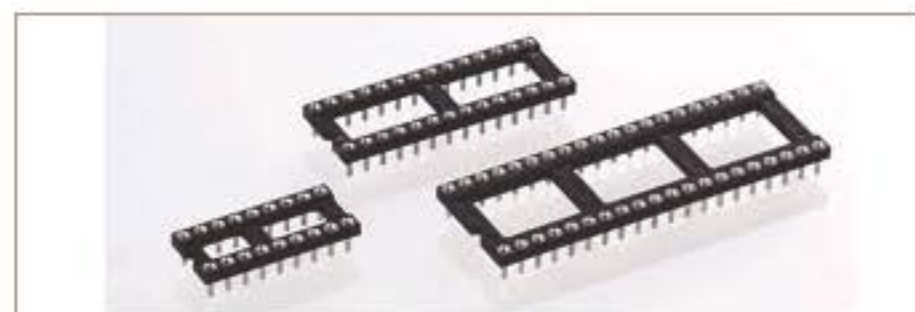

Ordering information RoHS-compliant parts


PP Plating code	Sleeve	Clip
87	Tin	Gold flash
83	Tin	Gold 0.75 µm

General technical specs. ...




	Poles	A	B	C	D	E	See	Order Codes
	6	7.6	7.62	10.1				115-PP-306-41-003101
	8	10.1	7.62	10.1				115-PP-308-41-003101
	10	12.6	7.62	10.1				115-PP-310-41-003101
	14	17.7	7.62	10.1				115-PP-314-41-003101
	16	20.3	7.62	10.1				115-PP-316-41-003101
	18	22.8	7.62	10.1				115-PP-318-41-003101
	20	25.3	7.62	10.1				115-PP-320-41-003101
	22	27.9	7.62	10.1				115-PP-322-41-003101
	24	30.4	7.62	10.1				115-PP-324-41-003101
	28	35.5	7.62	10.1				115-PP-328-41-003101
	20	25.4	10.16	12.6				115-PP-420-41-003101
	22	27.8	10.16	12.6				115-PP-422-41-003101
	24	30.4	10.16	12.6				115-PP-424-41-003101
	28	35.5	10.16	12.6				115-PP-428-41-003101
	24	30.5	15.24	17.7				115-PP-624-41-003101
	28	35.5	15.24	17.7				115-PP-628-41-003101
	32	40.6	15.24	17.7				115-PP-632-41-003101
	36	45.7	15.24	17.7				115-PP-636-41-003101
	40	50.8	15.24	17.7				115-PP-640-41-003101
	48	60.9	15.24	17.7				115-PP-648-41-003101
	50	63.5	15.24	17.7				115-PP-650-41-003101

Ultralow socket

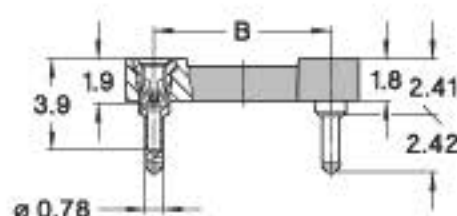

Option: very low version

Very low version is optional;
change suffix 003101 to 001101.
Same number of poles and insulator
body dimensions as standard series
110.

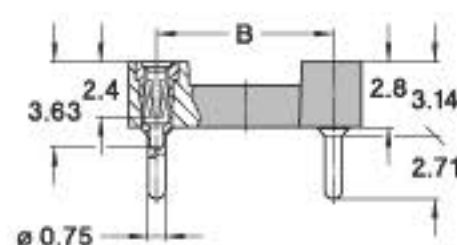

NEWS

