

Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 689979

Specifications

Stamped Dip Socket Series:

ED

Ratings:

| | |
|-----------------------|--------------------|
| Current | 1A |
| Voltage | 10 mV - 60 V |
| Dielectric strength | > 1000 V (RMS) |
| Contact resistance | 20 m Ω |
| Insulation resistance | 5000 Ω min. |

Material:

| | |
|-------------------|--|
| Plastic | PBT Glass-filled, UL94V-0 |
| Color | Black |
| Contact | Phosphor Bronze |
| Temperature range | -55°C / +110°C, 260°C for 5 sec. (solder bath resistant) |

ORDERING PROCEDURE


1 - 2 3 4 - 5

- 1) Series
- 2) Number of Positions (see chart for available positions)
- 3) Contact style:
 - D = Dual wipe
- 4) Plating:
 - T = Tin
- 5) Options:
 - CA = Capacitor
 - J = Retention leg


Please refer to following pages for ordering examples.

Series: ED

Stamped Dip Socket

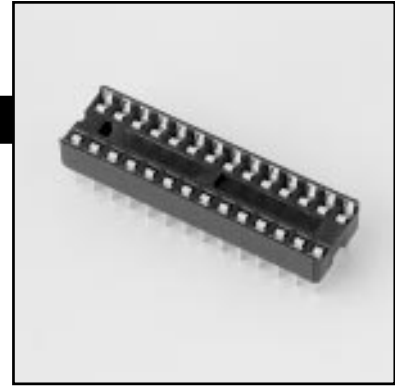

- ❖ Dual wipe contacts
- ❖ Closed bottom design to prevent wicking
- ❖ Side and end stackable
- ❖ Pin 1 polarized
- ❖ Optional retention leg

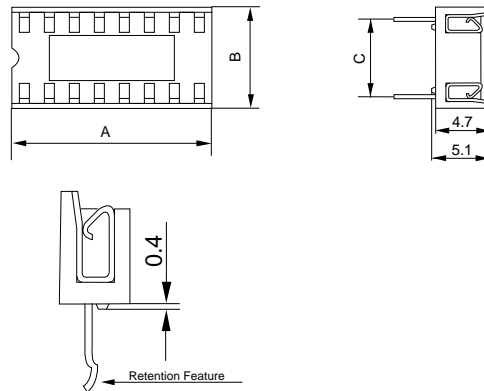

Ordering example: **ED - 28 DT**

| Positions | A | B | C |
|-----------|-------|-------|-------|
| 06 | 7.62 | 10.16 | 7.62 |
| 08 | 10.16 | 10.16 | 7.62 |
| 14 | 17.78 | 10.16 | 7.62 |
| 16 | 20.32 | 10.16 | 7.62 |
| 18 | 22.86 | 10.16 | 7.62 |
| 20 | 25.40 | 10.16 | 7.62 |
| 22* | 27.94 | 10.16 | 7.62 |
| 24 | 30.48 | 17.78 | 15.24 |
| 24* | 30.48 | 10.16 | 7.62 |
| 28 | 35.56 | 17.78 | 15.24 |
| 28* | 35.56 | 10.16 | 7.62 |
| 32 | 40.64 | 17.78 | 15.24 |
| 40 | 50.80 | 17.78 | 15.24 |
| 48 | 60.96 | 17.78 | 15.24 |

*Add 1 for 7.62 spacing on 22(1), 24(1) and 28(1) position