

CGA4J3X7R1H105K125AE

TDK Item Description : CGA4J3X7R1H105KT**S




Equivalent C2012X7R1H105K for Automotive

Application & Main Feature


Automotive Grade (Soft Termination)

Series

CGA4(2012) [EIA CC0805]



DC Bias Characteristic

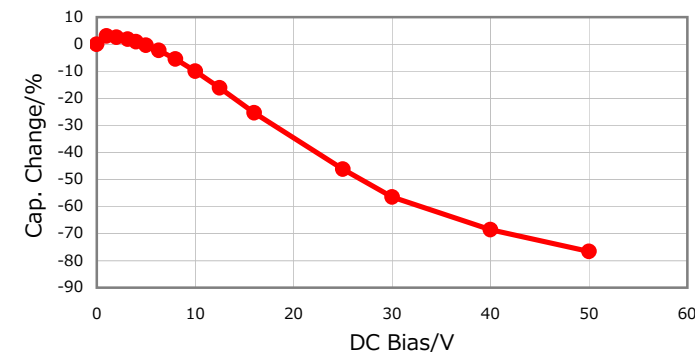

Dimensions

L 2.00mm +0.45,-0.2mm
W 1.25mm +0.25,-0.2mm
T 1.25mm +0.25,-0.2mm
B 0.20mm Min.
G 0.50mm Min.

Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

Rated Voltage

1H (50Vdc)

Capacitance

1uF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor

5% Max.


Insulation Resistance

500Mohm Min.


AEC-Q200

Yes


|Z|, ESR vs. Freq. Characteristics

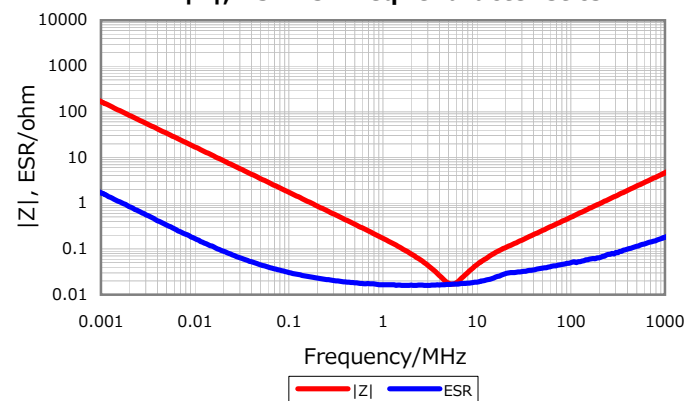


Temperature Characteristic

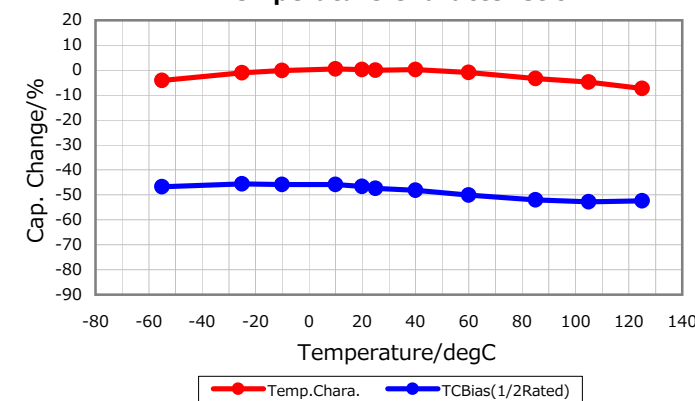

Cap. vs. Freq. Characteristic

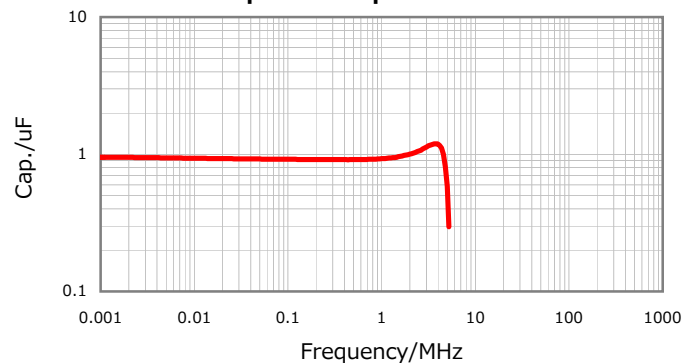

Ripple Temperature Rise Characteristic

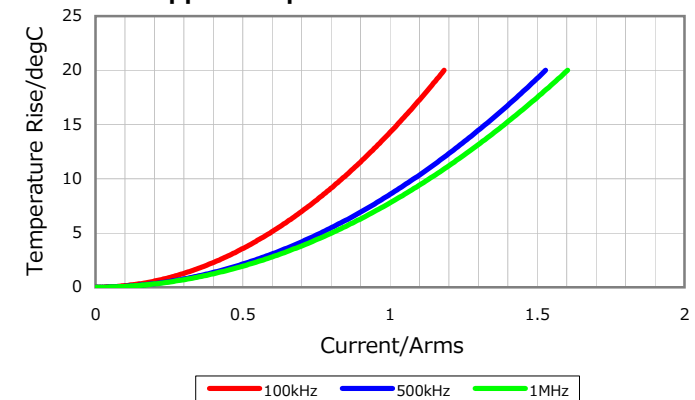

All specifications are subject to change without notice.

September 28, 2013

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK:

[CGA4J3X7R1H105K125AE](#)