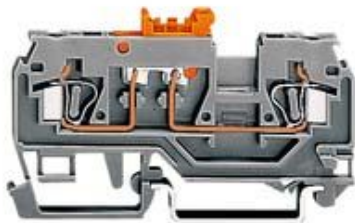

Item no.: 280-870
Product description: 2-conductor disconnect terminal block for test and measurement with knife disconnect disconnect link orange with test slot for test plug \varnothing 2 mm / 0.079 in and \varnothing 2.3 mm / 0.091 in



Produkt kann von Bild abweichen / product may differ

Packing unit 100 pieces

RoHS compliant

Product group	1 (Rail Mounted Terminal Blocks)
Cross section [mm ²]	0.08 - 2.5 mm ²
Cross section [AWG]	28 - 12 AWG
Connection method	CAGE CLAMP®CONNECTION
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	16 A
Weight	8.607 g
Color	grey
Wiring type	Front-entry
No. of connection Points	2
No. of potentials	2
Height	28.5 mm
Height	1.12 in
Width	5 mm
Width	0.197 in
Depth	69.5 mm

Depth	2.738 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in
Mounting	TS 35



Item number	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
280-870	ABS	05-HG476175/3-PDA	250	16	2,5
280-870	BV	07436/Co	250	16	2,5
280-870	CCA	NL5855	250	16	2,5
280-870	CSA	154112-1536071	300	15	28-12
280-870	DNV	E-10423	800	20	2,5
280-870	GL	17295-00HH	400	16	2,5
280-870	KEMA	2082859.07	250	16	2,5
280-870	LR	91/20112(E6)	250	16	2,5
280-870	PRS	TE/1718/880590/08	250	16	2,5
280-870	RMR	11130002	250	16	2,5
280-870	UR	E45172	600	15	28-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected