


-sheet 1 of 7 ^J

REVISION AA

RECOMMENDED STENCIL LAYOUT FOR SEAM-XX-XX.X-XX-XX-X-A-XX


NOTE: STENCIL TO BE .0060 [.152] THICK.

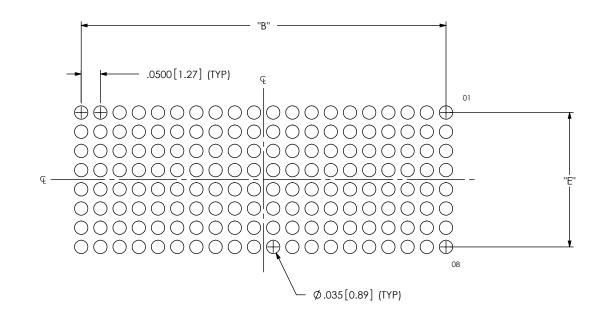



PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITEN CONSENT OF SAMTEC, INC.



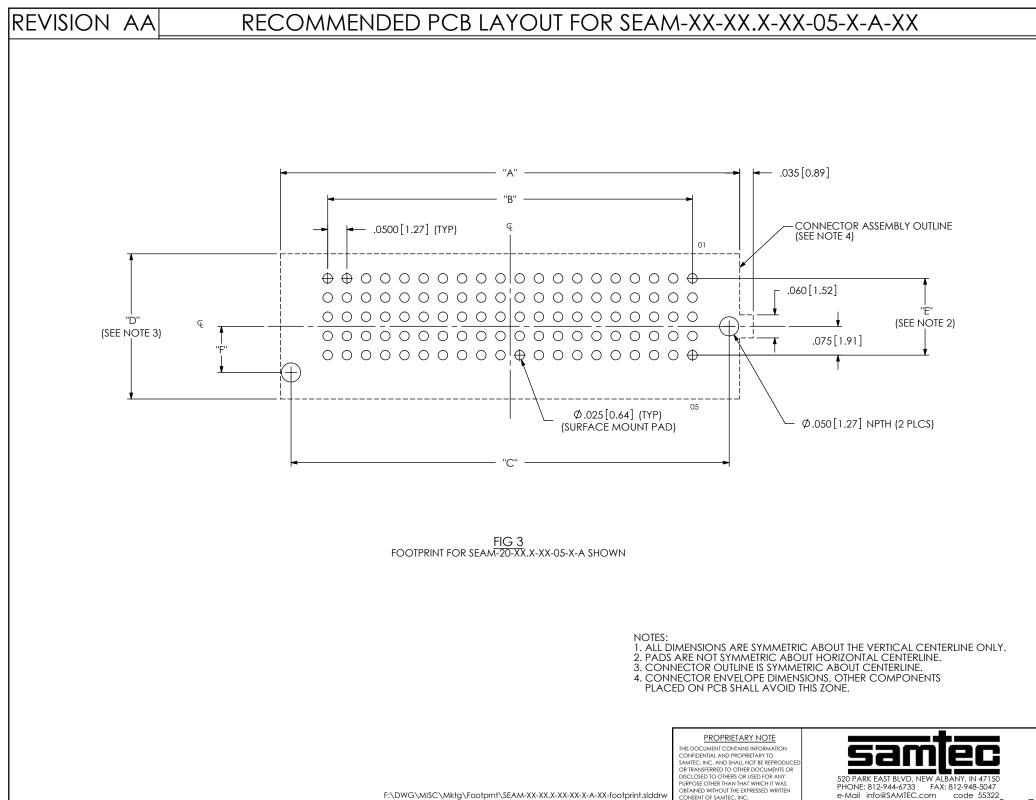

-SHEET 3 OF 7

REVISION AA

RECOMMENDED STENCIL LAYOUT FOR SEAM-XX-XX.X-XX-05-X-A-XX

NOTE: STENCIL TO BE .0060[.152] THICK.



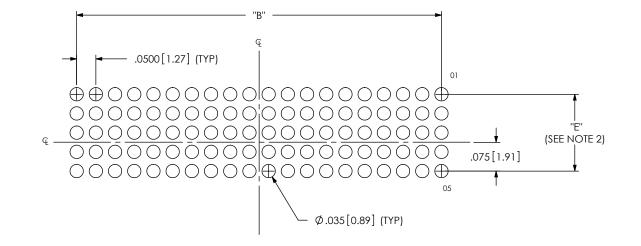


FIG 4 STENCIL FOR SEAM-20-XXX-XX-05-X-A SHOWN (ALL DIMENSIONS ARE SYMMETRIC ABOUT THE VERTICAL CENTERLINE ONLY.)



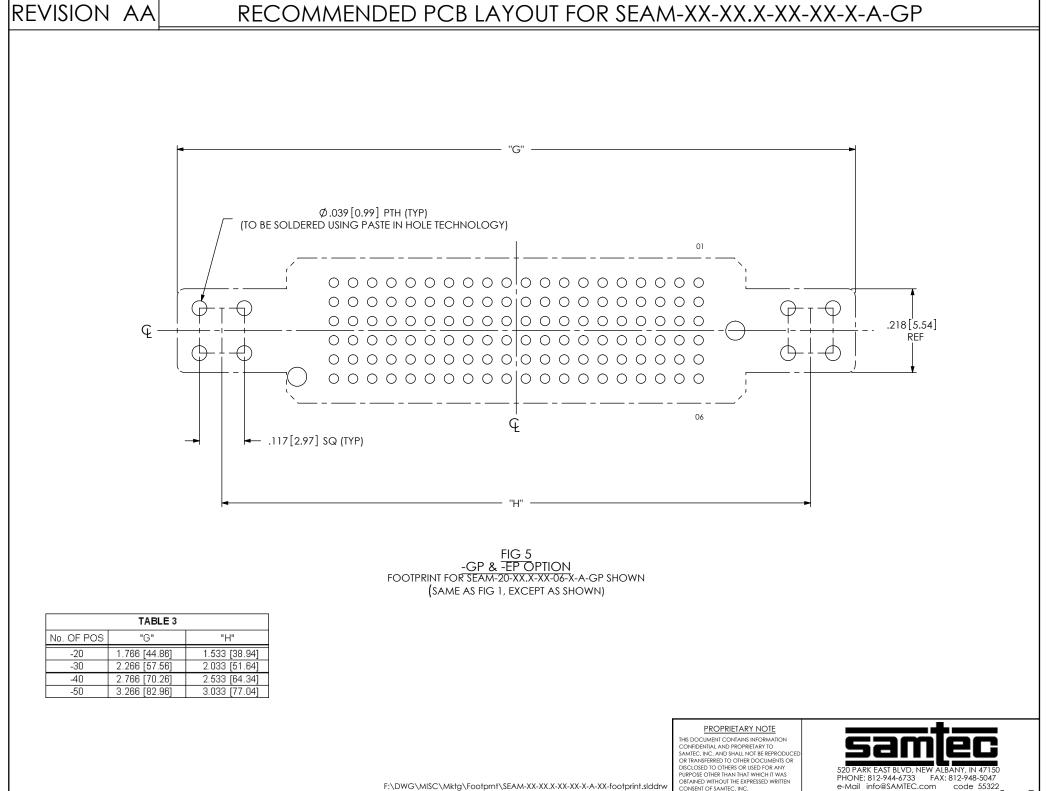

SHEET 5 OF 7

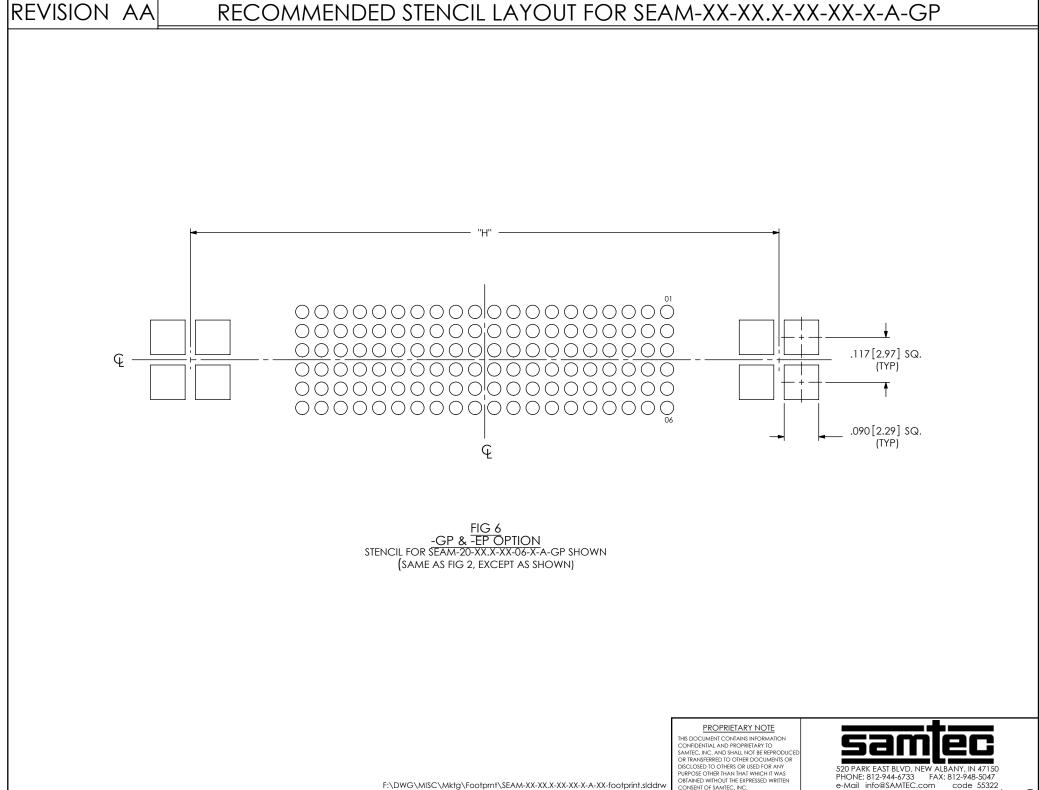

-SHEET 6 OF 7



-08

-10


100 [2.54]

.150 [3.81]

.480 [12.19]

.580 [14.73]

RECOMMENDED PCB LAYOUT FOR SEAM-XX-XX.X-XX-XX-X-A-XX

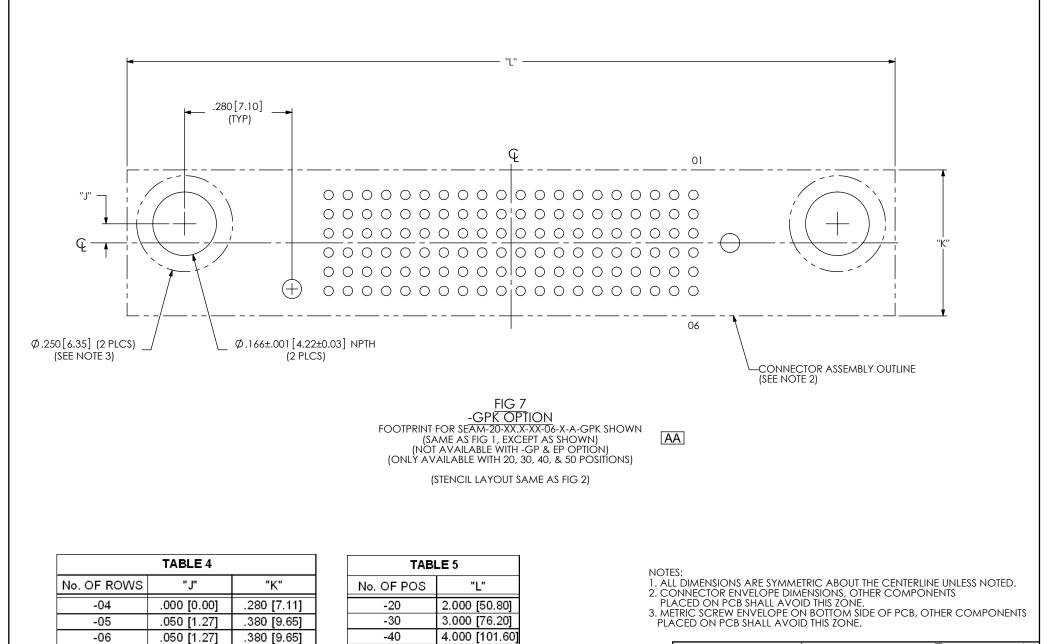

-50

5.000 [127.00

CONTRUMENTATION OF THE REPRODUCED SANTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO THERE OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITEN CONSINT OF SANTEC, INC.

PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION

CONFIDENTIAL AND PROPRIETARY TO