




CGA4J3X5R1H225K125AB (TDK item description : CGA4J3X5R1H225KT****)

Applications		Automotive Grade
Feature		General (Up to 50V)
		AEC-Q200
Series	CGA4(2012) [EIA CC0805]	



Size	
Length(L)	2.00mm +/-0.20mm
Width(W)	1.25mm +/-0.20mm
Thickness(T)	1.25mm +/-0.20mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	0.50mm Min.
Recommended Land Pattern(PA)	1.00 to 1.30mm (Flow Soldering) 0.90 to 1.20mm (Reflow Soldering)
Recommended Land Pattern(PB)	1.00 to 1.20mm (Flow Soldering) 0.70 to 0.90mm (Reflow Soldering)
Recommended Land Pattern(PC)	0.80 to 1.10mm (Flow Soldering) 0.90 to 1.20mm (Reflow Soldering)
Recommended Slit Pattern(SD)	

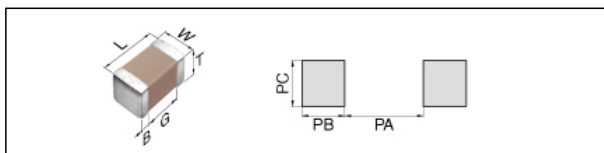
Electrical Characteristics	
Capacitance	2.2uF +/-10%
Rated Voltage	50Vdc
Temperature Characteristic	X5R(+/-15%)
Dissipation Factor	5% Max.
Insulation Resistance	227MΩ Min.

Other	
Soldering Method	Reflow, Flow
AEC Q200	Yes
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000Pcs Min.


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

CGA4J3X5R1H225K125AB


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

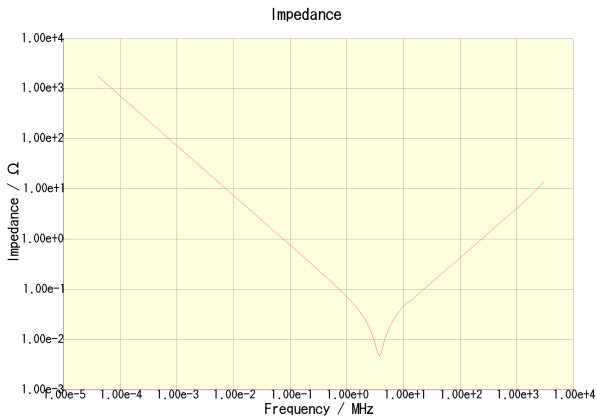


CGA4J3X5R1H225K125AB

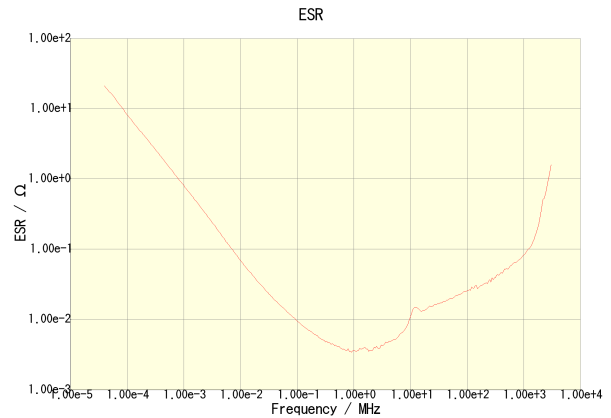


CGA4J3X5R1H225K125AB

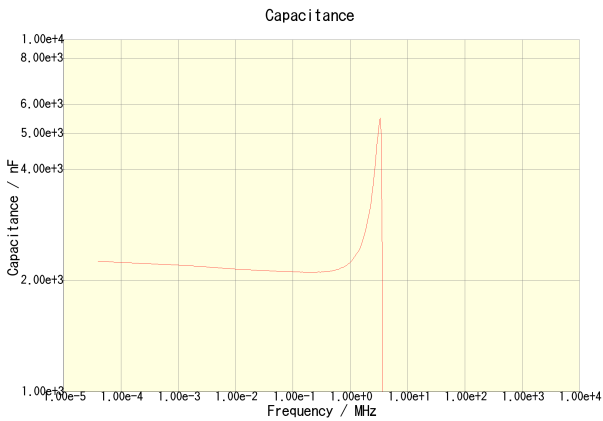


CGA4J3X5R1H225K125AB

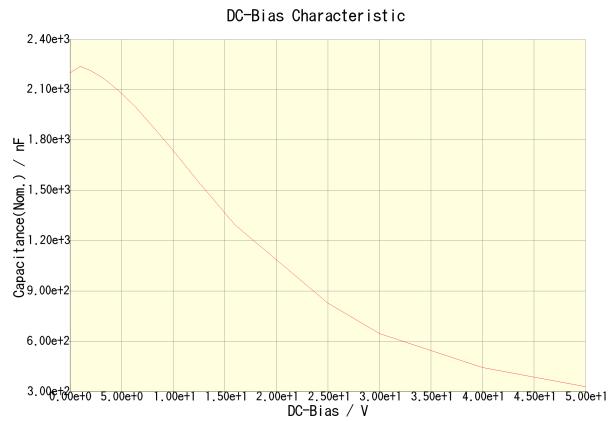

CGA4J3X5R1H225K125AB

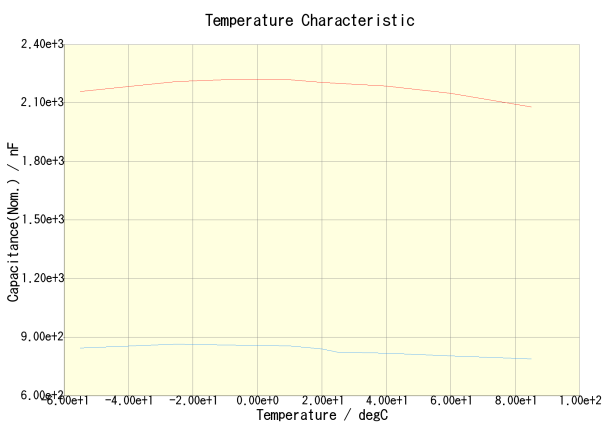

CGA4J3X5R1H225K125AB(DC Bias = 0V) CGA4J3X5R1H225K125AB(DC Bias = 25V)

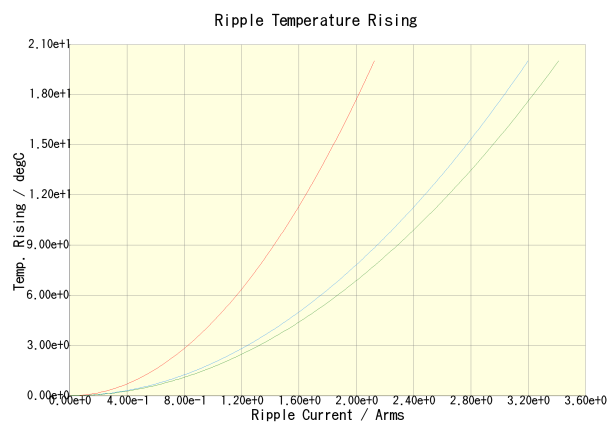

CGA4J3X5R1H225K125AB(100kHz) CGA4J3X5R1H225K125AB(500kHz)
CGA4J3X5R1H225K125AB(1MHz)

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.