

Distributed by:

**JAMECO**<sup>®</sup>  
ELECTRONICS

**www.Jameco.com ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 1591666

**Features**


- ESD Protection >30kV (Human Body Model) (Note 1)
- Ultra-Small Surface Mount Package
- Protects 2 Data Lines
- Low Leakage <25nA
- Low Capacitance 3pF Typ.
- Protects USB 2.0 and USB 1.1
- **Lead Free by Design/RoHS Compliant (Note 4)**
- **"Green" Device (Note 5)**

**IEC Compatibility (Note 1)**

- 61000-4-2 (ESD) Air-30kV Contact-30kV
- 61000-4-4 (EFT) 40A, 5/50 ns
- 61000-4-5 (Surge) 8x20μs, 20 Amperes

**Mechanical Data**

- Case: SOT-363
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish — Matte Tin annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- Orientation: See Diagram Below
- Marking Information: See Page 3
- Weight: 0.006 grams (approximate)

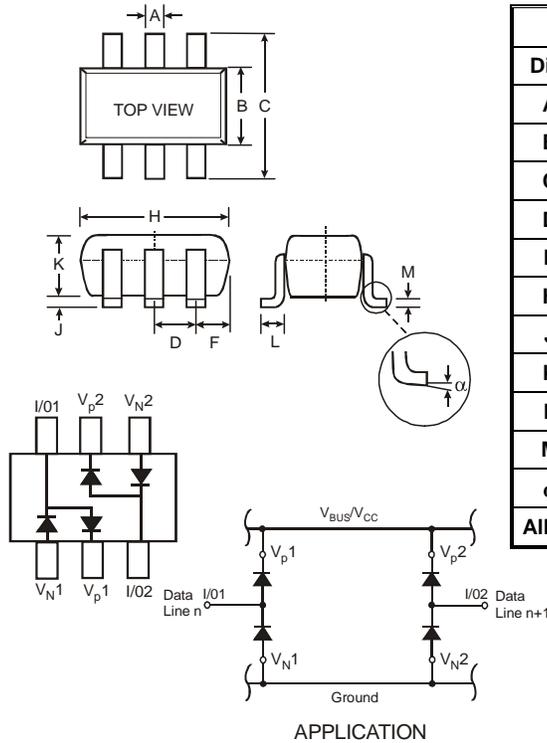

SOT-363		
Dim	Min	Max
A	0.10	0.30
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
F	0.30	0.40
H	1.80	2.20
J	—	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.25
α	0°	8°
All Dimensions in mm		

**Maximum Ratings** @T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V <sub>RM</sub>	100	V
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	80	V
Working Peak Reverse Voltage	V <sub>RWM</sub>		
DC Blocking Voltage	V <sub>R</sub>		
Forward Continuous Current (Note 2)	I <sub>FM</sub>	500	mA
Repetitive Peak Forward Current @ T <sub>p</sub> = 5μs, f = 50kHz (Note 2)	I <sub>FRM</sub>	1000	mA
Non-Repetitive Peak Forward Surge Current @ t = 1.0μs @ t = 1.0s	I <sub>FSM</sub>	20	A
		2.0	
Clamping Voltage @ I <sub>pp</sub> = 20A 8x20μs Waveform (Note 3)	V <sub>C</sub>	16	V
Power Dissipation (Note 2)	P <sub>d</sub>	200	mW
Thermal Resistance, Junction to Ambient Air (Note 2)	R <sub>θJA</sub>	625	°C/W
Operating and Storage Temperature Range	T <sub>i</sub> , T <sub>STG</sub>	-65 to +150	°C

- Notes:
1. Tested with V<sub>p</sub> connected to V<sub>n</sub> to simulate appropriate V<sub>BUS</sub>/V<sub>CC</sub> decoupling to ground.
  2. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
  3. Referenced to V<sub>p</sub> or V<sub>n</sub>.
  4. No purposefully added lead.
  5. Diodes Inc.'s "Green" policy can be found on our website at [http://www.diodes.com/products/lead\\_free/index.php](http://www.diodes.com/products/lead_free/index.php).

## Electrical Characteristics @T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 6)	V <sub>(BR)R</sub>	80	—	—	V	I <sub>R</sub> = 100μA
Forward Voltage	V <sub>F</sub>	0.62	—	0.72	V	I <sub>F</sub> = 5.0mA
		—	—	0.93		I <sub>F</sub> = 20mA
		—	—	1.0		I <sub>F</sub> = 100mA
		—	—	1.25		I <sub>F</sub> = 150mA
Reverse Current (Note 6)	I <sub>R</sub>	—	—	100	nA	V <sub>R</sub> = 70V
		—	—	50	μA	V <sub>R</sub> = 75V, T <sub>j</sub> = 150°C
		—	—	30	μA	V <sub>R</sub> = 25V, T <sub>j</sub> = 150°C
		—	—	25	nA	V <sub>R</sub> = 20V
Capacitance, Between I/O Lines (I/O1 & I/O2)	C <sub>LL</sub>	—	2.5	4.0	pF	V <sub>R</sub> = 0V, f = 1.0MHz
Capacitance Between I/O Line and Ground	C <sub>LG</sub>	—	3.3	5.3	pF	V <sub>R</sub> = 0V, f = 1.0MHz
Reverse Recovery Time	t <sub>rr</sub>	—	—	4.0	ns	V <sub>R</sub> = 6V, I <sub>F</sub> = 5mA

Notes: 6. Short duration pulse test used to minimize self-heating effect.

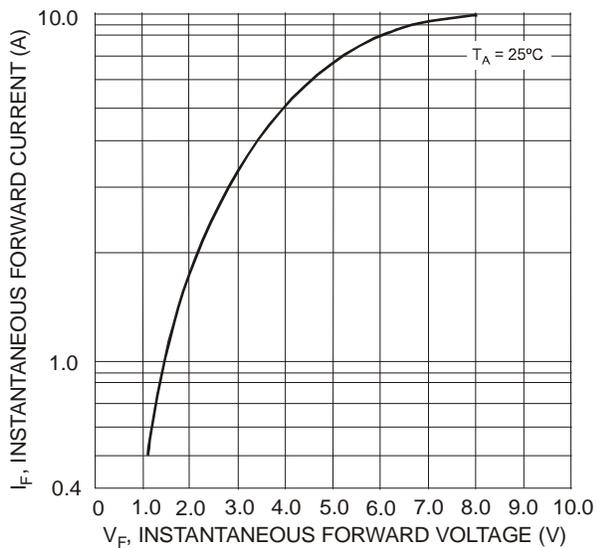


Fig. 1 Typical Forward Characteristics, High Current

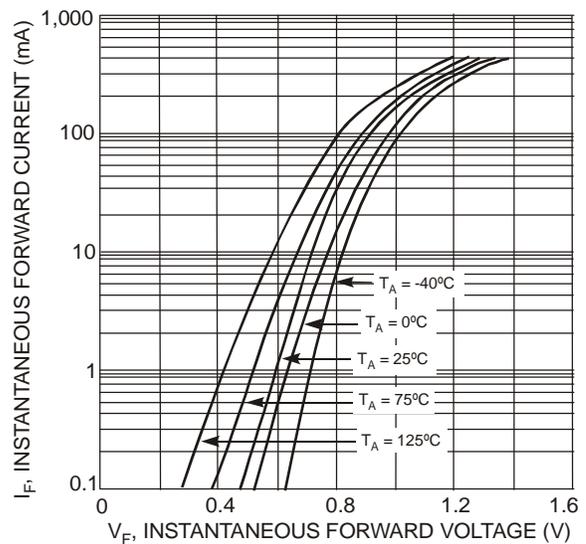


Fig. 2 Typical Forward Characteristics, Low Current

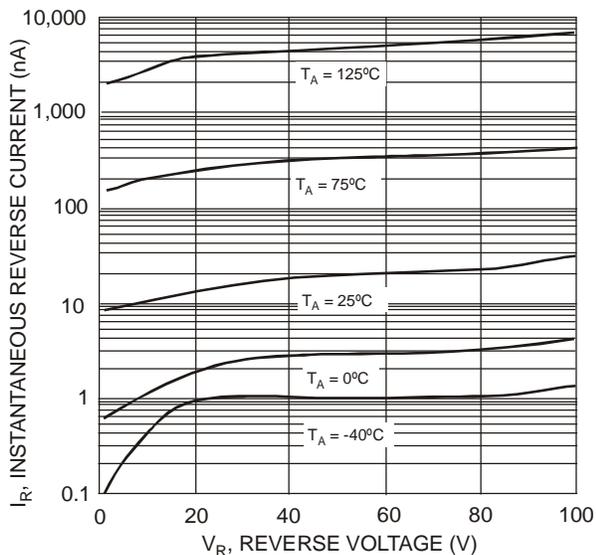


Fig. 3 Typical Reverse Characteristics

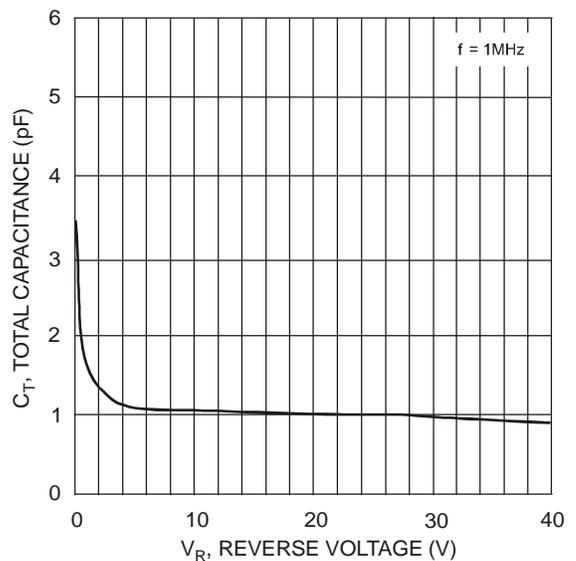


Fig. 4 Typical Capacitance vs. Reverse Voltage One Diode Element

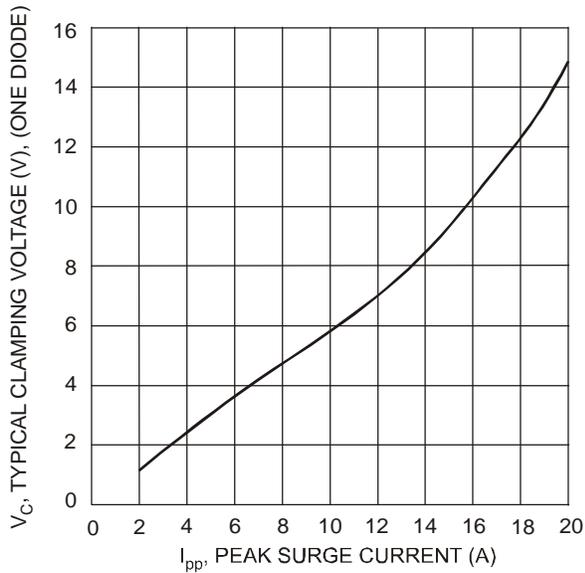


Fig. 5 61000-4-5 8x20 $\mu$ s Lightning Surge Response


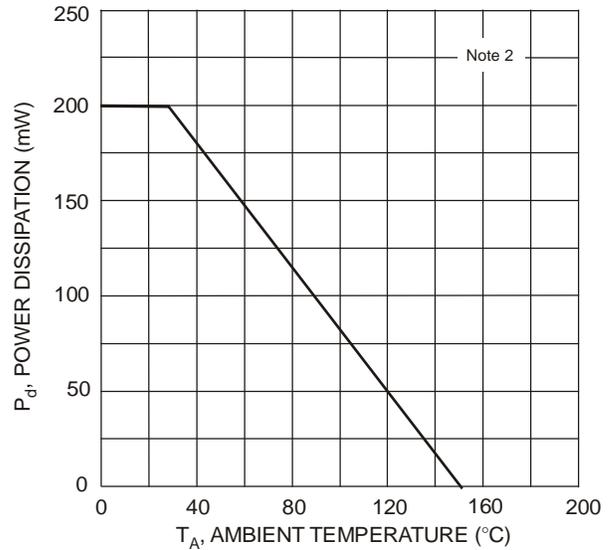


Fig. 6 Power Derating Curve, Total Package

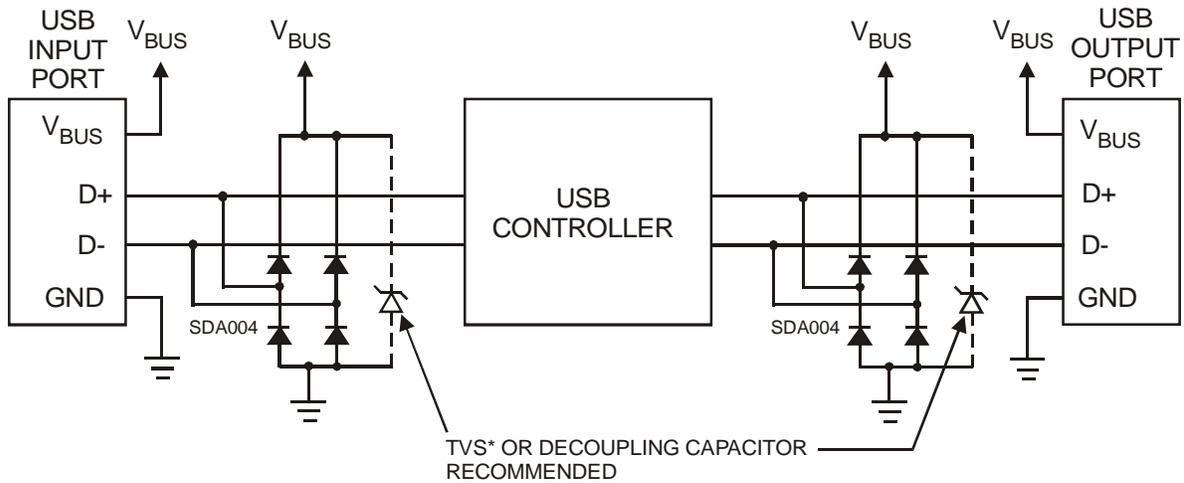

\* MMBZ6V8AL OR EQUIVALENT


## ESD PROTECTION - USB APPLICATION

## Ordering Information (Note 7)

Device	Packaging	Shipping
SDA004-7	SOT-363	3000/Tape & Reel

Notes: 7. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

## Marking Information



KAB or JAB = Product Type Marking Code  
 YM = Date Code Marking  
 Y = Year ex: R = 2004  
 M = Month ex: 9 = September

### Date Code Key

Year	2004	2005	2006	2007	2008	2009	2010	2111	2012
Code	R	S	T	U	V	W	X	Y	Z

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

**IMPORTANT NOTICE**

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

**LIFE SUPPORT**

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.