

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.



Jameco Part Number 2014844

VR Miniature Sized
series



Anti-Solvent
Feature
(Through
100V only)


- One rank smaller case sizes than VX series.
- Adapted to the RoHS directive (2002/95/EC).

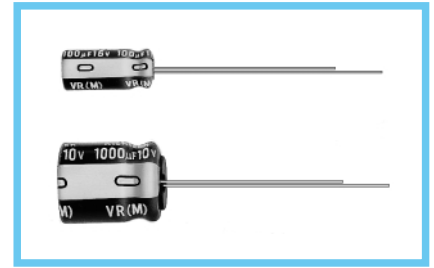

Specifications

Item	Performance Characteristics	
Category Temperature Range	-40 to +85°C (6.3V to 400V), -25 to +85°C (450V)	
Rated Voltage Range	6.3 to 450V	
Rated Capacitance Range	0.1 to 33000µF	
Capacitance Tolerance	±20% at 120Hz, 20°C	
Leakage Current	Rated voltage (V)	6.3 to 100V
	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (µA), whichever is greater. After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (µA), whichever is greater.	160 to 450V After 1 minute's application of rated voltage, CV ≤ 1000 : I = 0.1CV+40µA or less After 1 minute's application of rated voltage, CV > 1000 : I = 0.04CV+100 (µA) or less
tan δ	For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF. Measurement frequency : 120Hz, Temperature : 20°C	
	Rated voltage (V)	6.3 10 16 25 35 50 63 100 160 to 315 350 to 450
Stability at Low Temperature	tan δ (MAX.)	0.28 0.24 0.20 0.16 0.14 0.12 0.10 0.08 0.20 0.25
	Rated voltage (V)	6.3 10 16 25 35 50 63 100 160 to 200 250 to 350 400 450
Endurance	Impedance ratio	Z-25°C / Z+20°C 5 4 3 2 2 2 2 2 3 4 6 15
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C 12 10 8 5 4 3 3 3 4 8 10 —
Shelf Life	After 2000 hours' application of rated voltage at 85°C, capacitors meet the characteristic requirements listed at right.	Capacitance change Within ±20% of initial value tan δ 200% or less of initial specified value Leakage current Initial specified value or less
	After storing the capacitors under no load at 85°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.	
Marking	Printed with white color letter on black sleeve.	


Radial Lead Type

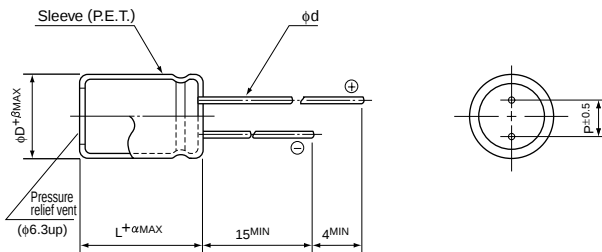

	4	5	6.3	8	10	12.5	16	18	20	22	25
φD (mm)	1.5	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0	12.5
P (mm)	0.45	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0	1.0	1.0
β (mm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0

α	(L < 20) 1.5 (L ≥ 20) 2.0
---	------------------------------

Type numbering system (Example : 10V 330µF)

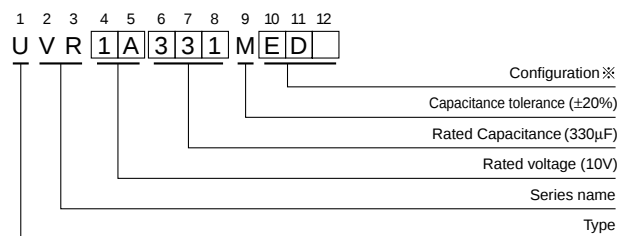

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
4	DD6
5	DD
6.3	ED
8 · 10	PD
12.5 to 18	HD
20 to 25	RD

- Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

■ Dimensions

V	6.3	10	16	25	35	50	63	100
Cap.(μF) Code	0J	1A	1C	1E	1V	1H	1J	2A
0.1	0R1					• 5 × 11	13	5 × 11
0.22	R22					• 5 × 11	2.9	5 × 11
0.33	R33					• 5 × 11	4.3	5 × 11
0.47	R47					• 5 × 11	6.2	5 × 11
1	010					• 5 × 11	17	5 × 11
2.2	2R2					• 5 × 11	28	5 × 11
3.3	3R3					• 5 × 11	35	5 × 11
4.7	4R7			• 5 × 11	35	• 5 × 11	40	5 × 11
10	100		• 5 × 11	50	• 5 × 11	55	• 5 × 11	60
22	220	• 5 × 11	65	• 5 × 11	75	• 5 × 11	80	• 5 × 11
33	330	• 5 × 11	80	• 5 × 11	85	• 5 × 11	90	• 5 × 11
47	470	• 5 × 11	95	• 5 × 11	100	• 5 × 11	110	• 5 × 11
100	101	• 5 × 11	135	• 5 × 11	145	• 5 × 11	160	• 5 × 11
220	221	5 × 11	200	6.3 × 11	240	6.3 × 11	260	8 × 11.5
330	331	6.3 × 11	270	6.3 × 11	290	8 × 11.5	370	10 × 12.5
470	471	6.3 × 11	320	6.3 × 11	350	8 × 11.5	440	10 × 12.5
1000	102	8 × 11.5	540	10 × 12.5	650	10 × 16	790	10 × 20
2200	222	10 × 20	1000	10 × 20	1100	12.5 × 20	1300	12.5 × 25
3300	332	10 × 20	1190	12.5 × 20	1450	12.5 × 25	1700	16 × 25
4700	472	12.5 × 20	1550	12.5 × 25	1800	16 × 25	2100	16 × 31.5
6800	682	12.5 × 25	1920	16 × 25	2250	16 × 35.5	2650	18 × 35.5
10000	103	16 × 25	2350	16 × 35.5	2700	18 × 35.5	2950	20 × 40
15000	153	16 × 35.5	2850	18 × 35.5	3100	20 × 40	3400	22 × 50
22000	223	18 × 40	3350	20 × 40	3700	22 × 50	4200	25 × 50
33000	333	22 × 50	3900	22 × 50	4500	25 × 50	4800	25 × 50

V	160	200	250	315	350	400	450
Cap.(μF) Code	2C	2D	2E	2F	2V	2G	2W
0.47	R47	6.3 × 11	15	6.3 × 11	15		
1	010	6.3 × 11	22	6.3 × 11	22	6.3 × 11	22
2.2	2R2	6.3 × 11	33	6.3 × 11	33	8 × 11.5	33
3.3	3R3	6.3 × 11	40	6.3 × 11	40	10 × 12.5	40
4.7	4R7	6.3 × 11	50	8 × 11.5	55	10 × 12.5	55
10	100	8 × 11.5	80	10 × 12.5	95	10 × 16	95
22	220	10 × 16	155	10 × 20	170	12.5 × 20	170
33	330	10 × 20	205	12.5 × 20	230	12.5 × 25	230
47	470	12.5 × 20	270	12.5 × 25	300	16 × 25	340
100	101	12.5 × 25	430	16 × 31.5	530	18 × 35.5	560
220	221	16 × 35.5	800	18 × 35.5	810	20 × 40	850
330	331	18 × 40	940	20 × 40	1130	22 × 50	1170
470	471	22 × 40	1410	22 × 50	1490	25 × 50	1600
1000	102	25 × 50	1900				

Size 4×11 is available for capacitors marked "•"

In this case, [6] will be put at 12th digit of type numbering system "▲"

Rated Ripple (mArms) at 85°C 120Hz

● Frequency coefficient of rated ripple current

V	Cap.(μF)	Frequency	50Hz	120Hz	300Hz	1 kHz	10kHz or more
6.3 to 100		Less than 47	0.75	1.00	1.35	1.57	2.00
		100 to 470	0.80	1.00	1.23	1.34	1.50
		1000 to 33000	0.85	1.00	1.10	1.13	1.15
160 to 450		0.47 to 220	0.80	1.00	1.25	1.40	1.60
		330 to 1000	0.90	1.00	1.10	1.13	1.15