


NACE220M50V6.3X6.3TR13F

Surface Mount Aluminum Electrolytic, 22 uF, 20% Tol, 50V@85C, 6.3x6.3 Case

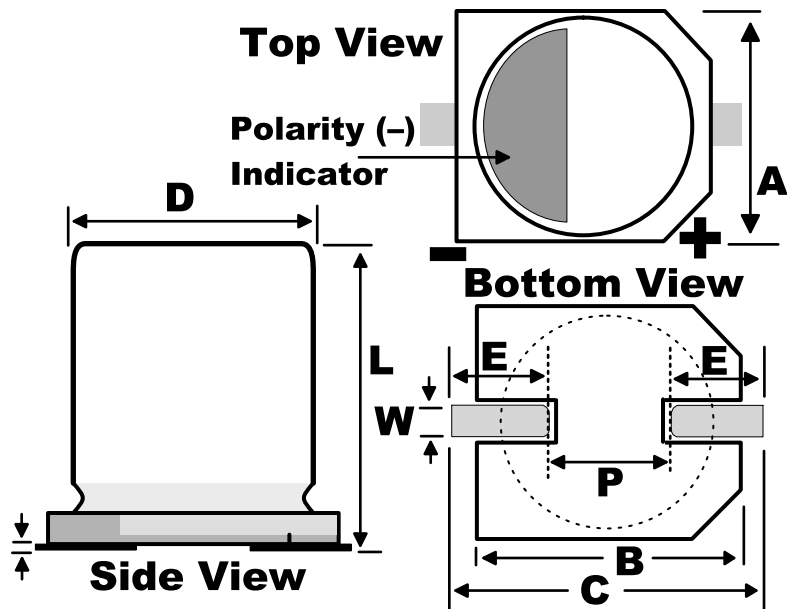

Dimensional Data (mm)

Specifications

ID	Dimensions	Tolerance	RoHS:	Yes
D:	6.3	+/-0.5	Capacitance:	22 uF
L:	6.3	+0	Tolerance:	20%
A:	6.6	+/-0.2	Voltage DC @ 85C:	50V
B:	6.6	+/-0.2	Life @ 65C:	8000
C:	7.2	+/-0.4	Life @ 85C:	2000 h
W:	0.65	+0.15/-0.4	Package Quantity:	500
E:	2.5	+/-0.2	Packaging:	T&R, 13 in. (18 mm)
P:	2.2	+/-0.2	Leakage:	11 uA
F:	0.3	max	Dissipation Factor:	0.1%
			Impedance Ratio 25:	2.0
			Impedance Ratio 40:	3.0
			ESR 120:	7.54 mOhm
			Ripple 120 25C:	58 A
			Ripple 120 85C:	58 A
			Ripple 1K 85C:	69.6 A
			Ripple 10K 85C:	75.4 A
			Ripple 100K 85C:	84.1 A

