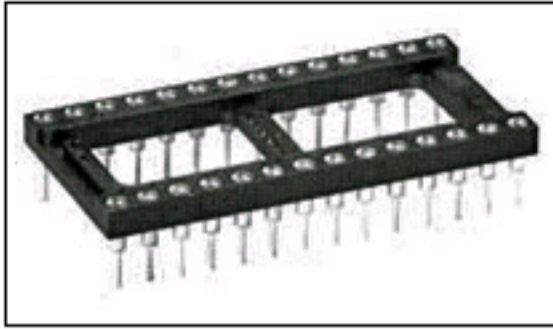


822-AG11D-ESL-LF Product Details

[Share](#) | [Print](#) | [Email](#)


822-AG11D-ESL-LF
(2-1571552-7)

TE Internal Number: 2-1571552-7

Active

View 3D PDF

DIP Sockets

[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Socket Style = Standard
- Through Hole Contact Termination Type
- 2.54 mm Centerline
- Row-to-Row Spacing = 10.16 mm
- 22 Positions

[View all Features](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

Add to My Part List | Request Sample | Find Similar Products | Buy Product

Documentation & Additional Information

Product Drawings:

- [OPEN FRAME DIP, ECONOMY \(STAMPED CONTACT\) \(REF AUGA...](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version E2)
- [3D Model](#) (IGES, Version E2)
- [3D Model](#) (STEP, Version E2)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Socket Style](#) = Standard
- Profile = Standard
- [Frame Style](#) = Ladder
- [Leg Style](#) = Straight
- Sleeve Material = Brass
- Product Series = 800 Series

Electrical Characteristics:

- Insulation Resistance (MΩ) = 5,000
- Contact Resistance (mΩ) = 10

Termination Features:

- [Termination Post Length \(mm \[in\]\)](#) = 3.18 [0.125]
- Solder Tail Contact Plating = Tin

Dimensions:

- [Height Above PC Board \(mm \[in\]\)](#) = 2.67 [0.105]

Body Features:

- [Centerline \(mm \[in\]\)](#) = 2.54 [0.100]
- [Row-to-Row Spacing \(mm \[in\]\)](#) = 10.16 [0.400]
- [Number of Positions](#) = 22
- [Mount Style](#) = Vertical

Contact Features:

- [Contact Termination Type](#) = Through Hole
- [Contact Base Material](#) = Beryllium Copper
- [Contact Plating, Mating Area, Material](#) = Gold (5)
- [Contact Style](#) = Stamped + Formed
- [Mating Contact Type](#) = Four-Fingered

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- Temperature Range (°C) = 125

Packaging Features:

- [Packaging Method](#) = Tube

Other:

- Brand = AMP

Corporate Information

- [Who We Are](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates

