




Adhesives Selection Guide

EVERY CONNECTION COUNTS





S1006

Raychem Two-Part Polyamide Epoxy



DESCRIPTION

Raychem-brand S1006 flexible high-viscosity, two-part polyamide epoxy is supplied in a bi-pack to ensure correct mixing. S1006 consists of a pale yellow epoxy resin and an amber polyamide hardener.

APPLICATION

S1006 is an excellent adhesive for many substrates including:

- Polyolefin tubing
- Heat shrink polyolefin molded parts
- Aluminum alloy adapters and connector end fittings
- Mild steel, brass and copper
- Raychem RNF-100 heat-shrink tubing
- Raychem Versafit heat-shrink tubing
- Raychem CRN heat-shrink tubing
- Raychem NT and NTFR heat-shrink tubing
- Raychem -3, -4, -8 and -71 molded parts

TEMPERATURE RANGE

-55°C to +135°C

PACKAGING

S1006 Kit 1: 2 sachets, 15 g each
 S1006 Kit 2: 4 sachets, 7.5 g each
 S1006 Kit A: 10 sachets, 3 g each
 (Kit A is Mil-Spec certified)

SPECIFICATIONS

Raychem RT-1006
 Raychem RK-6612
 A-A56031



S1009

Raychem Two-Part Modified Epoxy Adhesive



DESCRIPTION

Raychem-brand S1009 adhesive is a two-part modified epoxy that provides an environmental seal that is flexible, watertight, low outgassing, and permanent in a variety of applications, including space equipment and vehicles.

APPLICATION

The adhesive is specifically formulated for use with TE polyolefin tubing, such as

- Raychem RNF-100 heat-shrink tubing
- Raychem RT-218 and RT-220 heat-shrink tubing
- Raychem Versafit heat-shrink tubing
- Raychem CRN heat-shrink tubing
- Raychem NT and NTFR heat-shrink tubing
- Raychem -3, -4, -8, and -71 molded parts

S1009 adhesive also bonds well to PVC tubing.

TEMPERATURE RANGE


-55°C to +135°C

PACKAGING

S1009 Kit A: 10 sachets, 3 g each

SPECIFICATIONS

Raychem RT-1009

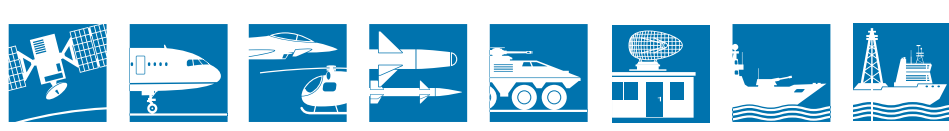

S1125

Raychem Chemical and Heat-Resistant Adhesive



DESCRIPTION

Raychem brand S1125 high performance adhesive has been developed to match the superior chemical and heat resistance properties of DR-25 heat-shrinkable tubing and -25 heat-shrinkable molded parts. The adhesive forms the third member of the System 25 product trio.

APPLICATION

Although developed for Raychem System 25 cable harnessing products range, S1125 is an excellent adhesive for many other substrates including:

- Raychem RNF-100 heat-shrink tubing
- Raychem Versafit heat-shrink tubing
- Raychem CRN heat-shrink tubing
- Raychem Convolex and HCTE convoluted tubing
- Raychem -3, -4, -12 and -100 molded parts
- Raychem System 100 components
- Aluminum alloy adapters and connector fittings

TEMPERATURE RANGE

-55°C to +150°C

PACKAGING

S1125 Kit 1: 5 sachets, 10 g each + accessories
 S1125 Kit 2: 2 sachets, 10 g each
 S1125 Kit 3: 1 sachet, 100 g
 S1125 Kit 4: 5 sachets, 10 g each
 S1125 Kit 5: 1 sachet, 10 g
 S1125 Kit 8: One 50 ml dual syringe + 3 mixing nozzles,
 5 mixing sticks, 5 abrasive, and 1 installation leaflet

SPECIFICATIONS

Raychem RT-1011
 Raychem RK-6619
 DIN VG-95343



S1264

Raychem NBCCS* Adhesive



DESCRIPTION

TE's Raychem brand S1264 high performance adhesive has been developed to match the superior chemical and heat resistance properties of TE's Raychem System 770. The adhesive material has been hardened to withstand the damaging effect of NBC contamination and decontamination washdowns.

APPLICATION

S1264 adhesive is suitable for use in wire harness systems requiring resistance to the effects of nuclear, biological and chemical agent exposure and decontamination when used with other NBC compatible components. S1264 will adhere to

- Raychem DR-25 heat-shrink tubing
- Raychem -25 molded parts
- Raychem FDR cable jackets
- Raychem RT-770 tubing and -770 molded parts

*Nuclear, Biological, Chemical, Contamination, Survivable

TEMPERATURE RANGE


-55°C to +150°C

PACKAGING

S1264 Kit 1: 1 sachet, 10 g
S1264 Kit 8: One 50 ml dual syringe, 5 mixing sticks, 5 abrasive, and 1 installation leaflet

SPECIFICATIONS

Raychem RT-1012

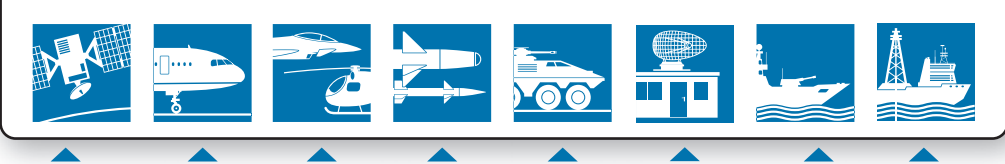

S1017

Raychem Hot-Melt Thermoplastic Adhesive Tape



DESCRIPTION

S1017 is a general purpose, hot-melt thermoplastic adhesive supplied in tape form for easy application to cable substrates. A tough yet flexible adhesive, it is suitable for bonding polyolefins, vinyls and neoprenes, and metals such as steel and aluminum.

APPLICATION

Raychem -3 and -4 molded parts

TEMPERATURE RANGE

-20°C to +60°C

PACKAGING

1 in x .010 in. x 50 ft roll
(25.4 mm x 0.3 mm x 15.2 m)

SPECIFICATIONS

Raychem RW-1050/1



S1030

Raychem Hot-Melt Adhesive Tape



DESCRIPTION

Raychem-brand S1030 tape is a non-flame-retarded polyolefin-based hot-melt adhesive tape. The product is recommended for high flexibility at temperatures as low as -80°C. The tape is often pre-applied to molded parts; its pre-coat designation is /180.

APPLICATION

S1030 is recommended for marine applications where salt water is a threat. The adhesive is very user-friendly, exhibiting excellent flow when heated under normal installation conditions. It is not recommended where aggressive solvents may be present or for terminations under in-service flexural stress at temperatures above 40°C.

With good adhesion to a wide range of substrates, S1030 hot-melt adhesive tape is recommended for use with polyurethane materials and for the following TE products:

- Raychem System 100 ZEROHAL tubing, cable jackets, and -100 molded parts
- Raychem System 25 molded parts
- Raychem DR-25, RNF and RW-175 heat-shrink tubing,
- Raychem FDR-jacketed cable

TEMPERATURE RANGE


-80°C to +80°C

PACKAGING

3/4 in. x 0.010 in. x 33 ft. roll
(20 mm x 0.3 mm x 10 m roll)

SPECIFICATIONS

Raychem RT-1050/6
Raychem RK-6017

**S1048****Raychem Hot-Melt Adhesive Tape****DESCRIPTION**

Raychem-brand S1048 is a hot-melt adhesive that can be supplied coated onto molded parts as /86. It is generally used as a high-strength hot-melt adhesive.

APPLICATION

S1048 will adhere extremely well to most cable jacket materials, such as ZHTM, DR-25, FDR or RNF, as long as enough heat has been applied at the installation stage to ensure complete flow and wetting of the adhesive to a substrate.

- Raychem ZHTM low-fire-hazard, zero-halogen heat shrink tubing, cable jackets and -100 molded parts
- Raychem DR-25 jackets and tubing
- Raychem FDR jackets and tubing
- Raychem RNF jackets and tubing

TEMPERATURE RANGE


-55°C to +120°C

PACKAGING


1 in. x .026 in. x 100 ft. roll
(25.4 mm x 0.66 mm x 30 m roll)

SPECIFICATIONS

Raychem RT-1050/3
Raychem RK-6626 for /86 pre-coat
VG95343 for /86 pre-coat on -100 molded parts

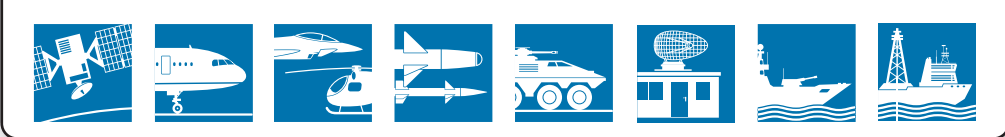

S1124 Raychem Elastomeric Adhesive Tape

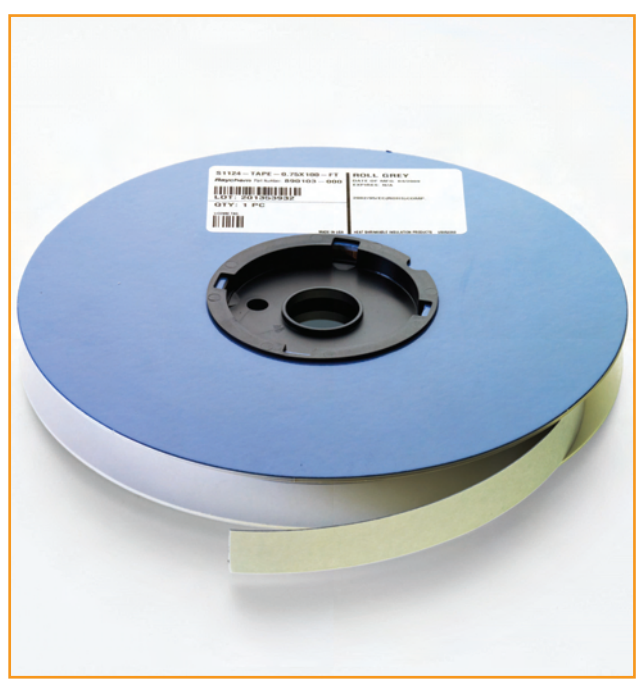

DESCRIPTION

Raychem-brand S1124 is a flexible adhesive based on elastomeric polymers. This adhesive was developed for use with heat-shrinkable products, NT, NT-MIL, NTFR and elastomeric polymer blend (EPB) molded parts. This adhesive provides good bonds to metals, such as steel and aluminum when bond line is heated to 150°C.

APPLICATION

S1124 tape is well suited for military ground vehicle electrical harness sealing due to its temperature and fluid resistance characteristics.

- Raychem NR, NTFR, and NT-MIL heat-shrink tubing
- Raychem EPB (-51) molded parts

TEMPERATURE RANGE


-55°C to +105°C

PACKAGING

3/4 in. x .018 in. x 100 ft. roll
(20 mm x 0.46 x 30 m)

SPECIFICATIONS

Raychem RT-1050/13

**S1297****Raychem Hot-Melt Thermoplastic Adhesive Tape****DESCRIPTION**

S1297 is a hot-melt thermoplastic pre-coat adhesive designed for use with TE's heavy-duty boots and cable entry seals. It is suitable for bonding to various cable jacket substrates including polyethylene, PVC, polychloroprene, and metals such as steel and aluminum.

APPLICATION

CES
CSGA cable entry seals
SST-FR

TEMPERATURE RANGE


-20°C to +90°C

PACKAGING

1 in x .010 in. x 10 ft roll
(25.4 mm x 0.3 mm x 3 m)

SPECIFICATIONS

Raychem RW-2019

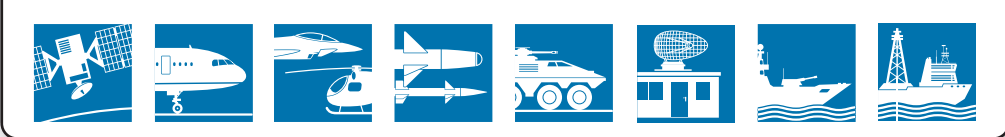

S1255-04
Raychem NBCCS Adhesive Tape



DESCRIPTION

Raychem-brand S1255-04 one-part epoxy tape has been developed to match the superior chemical and heat resistance properties of TE's Raychem System 200, 300, 780 and 790.

APPLICATION

Developed originally to match the +200°C temperature performance of Raychem System 200 components. S1255-04 also offers resistance to the effects of nuclear, biological and chemical agent exposure and decontamination when used with other compatible components.

- Raychem System 200 fluoroelastomeric tubing and molded parts
- Raychem System 300 fluoroplastic tubing and -55 molded parts
- Raychem System 780 fluoroelastomeric tubing and molded parts
- Raychem System 790 fluoroplastic tubing and molded parts

Note: S1255-02 is specified for use on legacy programs only.

TEMPERATURE RANGE


-55°C to +200°C

PACKAGING

3/4 in. x .020 in. x 100 ft. roll
 (20 mm x 0.5 mm x 30 m)

SPECIFICATIONS

Raychem RT-1014

**S1278****Raychem General-Purpose Hot-Melt Sealant Tape****DESCRIPTION**

Raychem-brand S1278 is a hot-melt thermoplastic grey butyl sealant designed for use with TE's heavy-duty breakout molded parts to offer excellent water sealing and weatherproofing.

APPLICATION

General purpose sealant and filler/potting medium for cable breakouts. Specify S1278 when fire retardancy is required.

TEMPERATURE RANGE

-40°C to +90°C


PACKAGING

S1278-01: 1 in. x .062 in. x 25 ft. roll
(25.4 mm x 1.57 mm x 7.6 m)

S1278-02: 3-3/4 in. x .125 in. x 10 ft. roll
(95 mm x 3.18 mm x 3 m)

SPECIFICATIONS

Raychem RW-2020

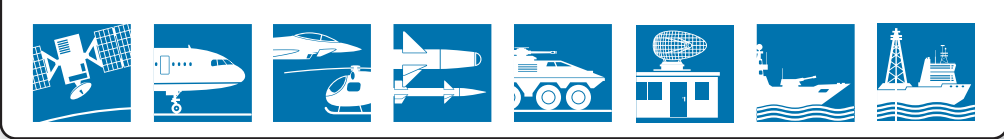

S1305

Raychem Halogen-Free Hot-Melt Sealant Tape



DESCRIPTION

Raychem-brand S1305 is a hot-melt thermoplastic grey butyl sealant designed for use with TE's heavy-duty breakout molded parts to offer excellent water sealing and weatherproofing.

APPLICATION

S1305 hot-melt tape was developed as a halogen-free, flame retardant sealant and filler/potting medium for cable breakouts.

TEMPERATURE RANGE


-40°C to +90°C

PACKAGING

1 in. x .062 in. x 25 ft. roll
(25.4 mm x 1.57 mm x 7.6 m)

SPECIFICATIONS

Raychem RW-2020

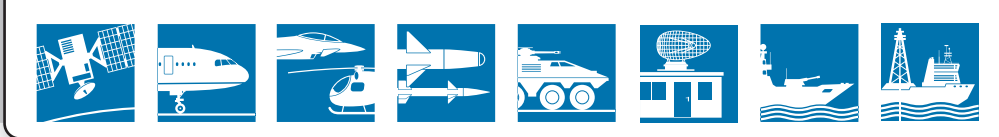

| | |
|---|-----------|
| SELECTION GUIDE | 13 |
| Adhesive/Sealant Product Characteristics Table..... | 14 and 15 |
| Adhesive/Sealant Selection Table..... | 16 |
| SUBSTRATE PREPARATION | 17 |
| INSTALLATION GUIDE | 18 |

SELECTION GUIDE

To determine the adhesive or sealant most compatible with a Raychem part, you must know the part's product type.

Use the Adhesive/Sealant Selection Table on page 16 to determine a Raychem part's product type and the adhesive/sealant compatible with that type.


Use the Adhesive/Sealant Product Characteristics Table (pages 14 and 15) to be sure the adhesive or sealant has the product characteristics your application requires.

Note: Users should independently evaluate the suitability of the product for their application. Before ordering, check with TE for most current data.

TE manufacturers Raychem adhesives and sealants to accommodate a wide range of applications, materials, and environmental conditions. Raychem adhesives include both thermosets and thermoplastics. Thermosets are curable two-part epoxies or crosslinked elastomers. Thermoplastics are hot-melt adhesives that flow when heated and set when cooled. They reflow when reheated to simplify component repair. TE also manufactures Raychem products that include a thermoplastic adhesive or a mastic-type sealant for water holdout applications. The sealants adhere to nonoily substrates and can be removed where reentry is necessary

To use the Selection Table, follow these four steps:

1. Under "Substrate Category," find the product material and product name/part number for the Raychem part.
2. Across the top of the table, find the part's product type and dash number.
3. At the intersection of the substrate category (product material/name/part number) and the product type (by designated dash number) you will find the part number for the most compatible adhesive for the Raychem part.
4. See the Adhesive/Sealant Product Characteristics Table to verify the characteristics of the adhesive/sealant you selected.

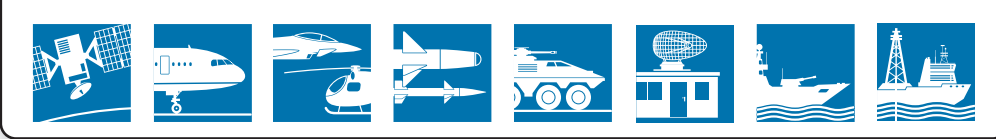

Adhesive/Sealant Product Characteristics Tables

| Product Type | Precoat Designation | Type | Operating Temperature Range | Product Designation | Available Form/Packaging |
|-----------------------|---------------------|------------------------------------|-------------------------------------|---------------------|---|
| Thermosets | | | | | |
| S1006 | — | Epoxy/polyamide two-part paste | -55°C to 135°C [-67°F to 275°F] | S1006 Kit 8 | 50-ml dual syringe |
| | | | | S1006 Kit 1 | Two 15-gram packs |
| | | | | S1006 Kit 2 | Four 7.5-gram packs |
| | | | | S1006 Kit A | Ten 3-gram packs |
| S1009 | — | Epoxy/polymercaptan two-part paste | -55°C to 135°C [-67°F to 275°F] | S1009 Kit A | Ten 3-gram packs |
| | | | | S1009 Kit 8 | 50-ml dual syringe |
| S1255-04 | — | One-part epoxy tape adhesive | -55°C to 200°C [-67°F to 392°F] | S1255-04 | Tape [3/4 in. x .020 x 100 ft.] |
| S1125 | — | Epoxy/polyamide two-part paste | -55°C to 150°C [-67°F to 302°F] | S1125 Kit 1 | Five 10-gram packs |
| | | | | S1125 Kit 2 | Two 10-gram packs |
| | | | | S1125 Kit 3 | One 100-gram pack |
| | | | | S1125 Kit 4 | Five 10-gram packs |
| | | | | S1125 Kit 5 | One 10-gram pack |
| S1264 | — | Epoxy/polyamide two-part paste | -55°C to 150°C [-67°F to 302°F] | S1264 Kit 1 | One 10-gram pack |
| | | | | S1264 Kit 8 | 50-ml dual syringe |
| | | | | /225 | Precoated latent-curing epoxy/polyamide |
| Thermoplastics | | | | | |
| S1017 | /42 | Hot-melt/ polyamide | -20°C to 60°C*** [-4°F to 140°F] | S1017 | Tape [1 in. x .010 in. x 50 ft.] |
| S1030 | /180 | Hot-melt/ polyolefin | -80°C to 80°C [-112°F to 176°F] | S1030 | Tape [3/4 in. x .010 in. x 33 ft.] |
| S1048 | /86 | Hot-melt, high performance | -55°C to 120°C [-67°F to 248°F] | S1048 | Tape [1 in. x .026 in. x 100 ft.] |
| S1124 | /164 | Hot-melt, elastomeric polymer | -55°C to 105°C [-67°F to 221°F] | S1124 | Tape [3/4 in. x .018 in. x 10 ft.] |
| S1297 | /97 | Hot-melt/ polyamide adhesive | -20°C to 90°C [-4°F to 194°F] | S1297 | Tape [1 in. x .010 in. x 10 ft.] |
| Sealants | | | | | |
| S1278 | — | Hot-melt grey butyl sealant | -40°C to 90°C [-40°F to 194°F] | S1278-01 | Tape [1 in. x .062 in. x 25 ft.] |
| | | | | S1278-02 | Tape [3-3/4 in. x .125 in. x 10 ft.] |
| S1305 | — | Hot-melt grey butyl sealant, FR | -40°C to 90°C [-40°F to 194°F] | S1305-01 | Tape [1 in. x .062 in. x 25 ft.] |


*Shelf life from date of manufacture.

**For specific adhesion properties, see product specification sheets.

***Passes cold bend at -40°C [-40°F] per RT-4204.

****Only S1006 Kit A conforms to A-A-56031.

For full details on installation procedures and curing conditions, please refer to the applicable TE Code of Practice or installation document.

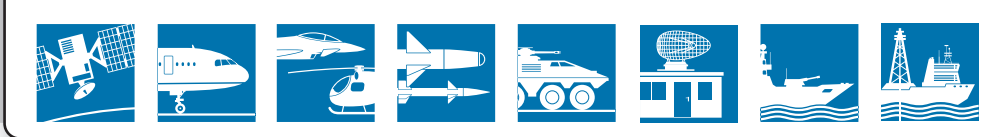

Adhesive/Sealant Product Characteristics Tables (Continued)

| Product Type | Pot Life at 23°C [73.4°F] | Curing Conditions | Shelf life* at or below 25°C [77°F] | Specifications** | Comments |
|-----------------------|---------------------------|--|-------------------------------------|-------------------------------------|---|
| Thermosets | | | | | |
| S1006 | 1 hr | 96 hr at 20°C [68°F] min. or 1 hr at 120°C [248°F] | 2 years 1 year Kit 8 | RT-1006 RK-6612 A-A-56031**** | General purpose harnessing adhesive. Not used on fluoroelastomers, silicone or PVDF |
| S1009 | 20 min. | 24 hr at 20°C [68°F] min. or 1 hr at 95°C [203°F] 45 min at 120°C [248°F] | 2 years 1 year Kit 8 | RT-1009 | General purpose harnessing adhesive. Not used on fluoroelastomers or silicone |
| S1255-04 | — | 90 min at 155°C [311°F] or 15 min at 26 0°C [464°F] | 1 year with refrigeration | RT-1014 | One-part epoxy tape used with fluoroelastomer harness systems. |
| S1125 | — | 24 hr at 20°C min. or 1 hr at 85°C [185°F] | 18 months | RT-1011 RK-6619 VG-95343 | Good fluid-resistant epoxy used with System 25 |
| S1264 | 90 min. | 24 hr at 20°C min. or 1 hr at 85°C [185°F] | 18 months | RT-1012 | Tested to NBC requirements |
| /225 | — | Cure during installation of molded parts | 36 months | VG-95343 RK-6630 | Precoated epoxy system for System 25 |
| Thermoplastics | | | | | |
| S1017 | — | 120°C [248°F] | Unlimited | RT-1050/1 | General purpose harnessing adhesive Standard precoated adhesive for -3 and -4 molded parts |
| S1030 | — | 120°C [248°F] | Unlimited | RT-1050/6 RK-6017 | Good low-temperature flexibility Available as a preinstalled tape for molded parts |
| S1048 | — | 160°C [320°F] | Unlimited | RT-1050/3 RK-6626 | Requires high temperature to achieve bonding. Highest service temperature for hot melt |
| S1124 | — | 150°C [302°F] | Unlimited | RT-1050/13 | Requires reflowing in an oven at 150°C [302°F] for 90 minutes. Designed to bond to -51 molded parts. |
| S1297 | — | 120°C [248°F] | Unlimited | RW-2019 | General purpose harnessing adhesive Standard precoated adhesive in Sigmaform molded parts, CES and CSGA cable entry seals, and SST-FR heat-shrinkable tubing |
| Sealants | | | | | |
| S1278 | — | 110°C [230°F] | Unlimited | RW-2020 | General purpose sealant and cable breakout area filler |
| S1305 | — | 110°C [230°F] | Unlimited | RW-2020 | Halogen-free, flame-retardant sealant and cable breakout area filler |


*Shelf life from date of manufacture.

**For specific adhesion properties, see product specification sheets.

***Passes cold bend at -40°C [-40°F] per RT-4204.

****Only S1006 Kit A conforms to A-A-56031.

For full details on installation procedures and curing conditions, please refer to the applicable TE Code of Practice or installation document.

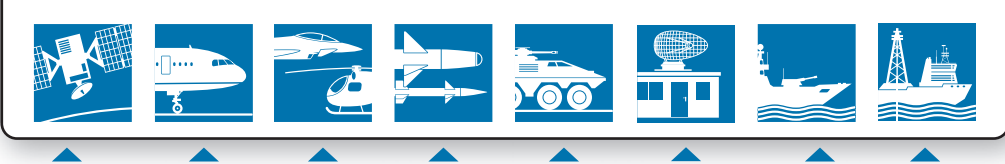


Adhesive/Sealant Selection Table

SELECTION TABLE

| Substrate Category | Product Name Examples | Molded Part Material Dash Number | | | | | | | | | | | | |
|--------------------|-----------------------|----------------------------------|-------|----|-------|----------|-------|----------|-------|----------|-------|-------|----------|-------|
| | | -3 | -4 | -6 | -8 | -12 | -25 | -50 | -51 | -55 | -71 | -100 | -125 | -130 |
| Polyolefin | RNF-100 | S1006 | S1006 | — | — | — | — | — | — | — | S1006 | — | — | S1006 |
| | Versafit | S1009 | S1009 | — | — | — | — | — | — | — | S1009 | — | — | S1009 |
| | CRN | S1017 | S1017 | — | — | — | — | — | — | — | S1017 | — | — | S1017 |
| | BSTS | S1030 | S1030 | — | — | — | — | — | — | — | S1030 | — | — | — |
| | SST | S1048 | S1048 | — | — | — | — | — | — | — | S1048 | — | — | — |
| | HR | S1297 | S1297 | — | — | — | — | — | — | — | S1297 | — | — | — |
| Fluoro-polymer | | S1009 | S1009 | — | S1009 | — | S1125 | — | — | — | S1009 | — | S1009 | — |
| | PVDF | S1048 | S1048 | — | — | — | — | — | — | — | S1048 | — | S1048 | — |
| | | S1125 | S1125 | — | — | — | — | — | — | — | S1125 | — | S1125 | — |
| | RT-555 | — | — | — | — | S1255-04 | — | — | — | S1255-04 | — | — | S1255-04 | — |
| | HCTE | — | — | — | — | S1255-04 | S1125 | — | — | S1255-04 | — | — | — | — |
| | Convolex | — | — | — | — | S1125 | — | — | — | S1125 | — | — | — | — |
| Vinyl | PVC | S1006 | S1006 | — | — | — | — | — | — | — | S1006 | — | — | — |
| | | S1009 | S1009 | — | — | — | — | — | — | — | S1009 | — | — | — |
| | | S1017 | S1017 | — | — | — | — | — | — | — | S1017 | — | — | — |
| Elastomer | DR-25 | — | — | — | — | — | S1125 | S1125 | S1125 | — | — | — | — | — |
| | | S1006 | S1006 | — | — | — | — | — | S1124 | — | S1006 | — | — | — |
| | | S1009 | S1009 | — | — | — | — | — | — | — | S1009 | — | — | — |
| | NT | S1017 | S1017 | — | — | — | — | — | — | — | S1017 | — | — | — |
| | | — | — | — | — | — | S1125 | — | S1124 | — | — | — | — | — |
| | SFR | — | — | * | — | — | — | — | — | — | — | — | — | — |
| | SRFR | — | — | * | — | — | — | — | — | — | — | — | — | — |
| | RW-200 | — | — | — | — | S1255-04 | — | — | — | S1255-04 | — | — | S1255-04 | — |
| | VPB | — | — | — | — | — | — | S1125 | — | — | — | — | — | — |
| | | — | — | — | — | — | — | S1255-04 | — | — | — | — | — | — |
| ZEROHAL | XFFR | — | — | — | — | — | — | — | — | — | — | S1030 | — | — |
| | ZHTM | — | — | — | — | — | — | — | — | — | — | S1030 | — | — |

*GE RTV 108 used with SFR, SRFR, and -6 (silicone) molded parts.

| Substrate Category | Product Name Examples | Molded Part Material Dash Number | | |
|-------------------------|-----------------------|----------------------------------|----------|----------|
| | | -770 | -780 | -790 |
| Nuclear Fluoro-polymers | RT770 | S1264 | — | — |
| | RT780 | — | S1255-04 | — |
| | RT790 | — | — | S1255-04 |



SUBSTRATE PREPARATION PROCEDURES

Preparation of the substrate depends on the part to be bonded. Following are two preparation procedures. The first applies to plated metals and adapters; the second applies to polymer molded parts, cable jackets, and tubing materials.

For full details on installation procedures and curing conditions, please refer to the applicable TE Code of Practice or installation document.

Note:

- Avoid contamination of the prepared surface. If using primer, apply it according to the manufacturer's instructions and allow it to dry.
- Epoxy adhesives may cause skin and eye irritation. Be sure to observe the handling instructions.
- When using hot-melt adhesives on substrates with high heat-sink capacity (such as connector backshells), preheat the substrate until it is hot to touch, then apply the adhesive tape and shrink the molded part in place.

Caution:

The use of cleaning solvent is described in the preparation of various components for adhesive bonding. Please observe the solvent manufacturer's safety recommendations. Several Raychem epoxy adhesives and solvent base primers are also described in some cases. For specific handling precautions, please consult the appropriate Raychem material safety data sheet for the adhesive being used.

FOR MORE INFORMATION

Technical Support

| | |
|----------------|-----------------------|
| Internet: | www.te.com/ADM |
| USA: | +1 (800) 522-6752 |
| Canada: | +1 (905) 470-4425 |
| Mexico: | +52 (0) 55-1106-0814 |
| C. America: | +52 (0) 55-1106-0814 |
| South America: | +55 (0) 11-2103-6000 |
| Germany: | +49 (0) 6251-133-1999 |
| Great Britain: | +44 (0) 8706-080208 |
| France: | +33 (0) 1-3420-8686 |
| Netherlands: | +31 (0) 73-6246-999 |
| China: | +86 (0) 400-820-6015 |

Follow us on Twitter for all the latest product news
@TEConnectivity, and on Facebook, TEConnectivity.

www.te.com/ADM

© 2012 Tyco Electronics Corporation. All Rights Reserved.

2-1773464-2 ADM/RRD 5M 06/2012

Convolex, Raychem, Versafit, ZEROHAL, TE Connectivity, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies.

Other product or company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information herein, nothing herein constitutes any guarantee that such information is error-free, or any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. The TE entity issuing this publication reserves the right to make any adjustments to the information contained herein at any time without notice. All implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose are expressly disclaimed. The dimensions herein are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.





Installation Guide

INSTALLATION PROCEDURES

Preparation of the substrate depends on the part to be bonded.

Following are two preparation procedures. The first applies to plated metals and adapters; the second applies to polymer molded parts, cable jackets, and tubing materials.

Bonding between molded parts, plated metals and adapters

To ensure the best possible bond between a molded part and plated materials and adapters, degrease the end of the molded part which will recover onto the plated metal or adaptor with isopropyl alcohol or isopropanol (IPA) impregnated tissue wipe. NEVER abrade plated metals and adapters.

Where preheating of the plated metal or adapter is judged to be necessary for large and high heat sink terminations, care must be taken to ensure the connector insulation and primary wire insulation are not damaged. Ensure heat is directed to the metal area and all other areas are avoided. TE cannot be held responsible for damage caused during the preheating of plated metals or adapters.

Bonding between molded parts, cable jackets and tubing materials

To ensure the best possible bond between the molded part, cable jacket or tubing degrease the cable jacket in the area where the molded part will recover onto the cable using Isopropyl alcohol. (Approximately 30 mm). Abrade the cable jacket thoroughly in the same area with 100 grit emery cloth. The whole surface of the cable jacket should be abraded removing any print on the cable jacket. Remove loose particles from the abraded area using a dry tissue. DO NOT use a solvent wipe.

Ensure sufficient cable jacket has been abraded to incorporate the strip length requirement. Degrease the inner area of the molded part at each end thoroughly (Approximately 30mm) using Isopropyl alcohol. Abrade the inner area of the molded part at each end thoroughly (Approximately 30mm) with 100 grit emery cloth. Remove loose particles from the abraded area using a dry tissue. DO NOT use a solvent wipe.

Installation of heat shrink molded parts

For the installation of the wide range of TE heatshrink molded parts including straight, 45°, 90° and transitions refer to the appropriate Code of Practice Installation Procedures.

Installation of adhesives

For details of installation of the wide range of TE adhesives including epoxy, hot melt, tapes and pre-installed options refer to the appropriate Code of Practice Installation Procedures.

These Codes of Practice include information such as recommended tooling, installation temperatures, curing cycles and visual standards.

Health and Safety

Adhere to local Codes and Regulations relating to Safe Working practices.

The installation should be carried out in a well ventilated area. Always wear heat resistant safety gloves when handling hot plastics and adhesives. The use of suitable protective gloves and barrier cream is recommended when using solvents.

Avoid prolonged repeated skin contact with solvents and always wash hands after using solvents. Care should be taken to wear safety glasses when using and handling chemical solvents. If eyes do become contaminated, flush with water and obtain medical assistance immediately. For specific handling precautions please consult appropriate TE material safety data sheet for adhesive being used.