

ALUMINUM ELECTROLYTIC CAPACITORS



Chip Type, High Reliability.
Low temperature ESR specification.
series



For SMD




Long Life


Anti-Solvent
Feature

Upgrade

- Chip type, high temperature range, for +125°C use.
- Added ESR specification after the test at -40°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).






Specifications

Item	Performance Characteristics										
Category Temperature Range	-40 to +125°C										
Rated Voltage Range	10 to 100V										
Rated Capacitance Range	10 to 3300μF										
Capacitance Tolerance	±20% at 120Hz, 20°C										
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3μA, whichever is greater.										
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C										
	Rated voltage (V)	10	16	25	35	50	63	80	100		
	tan δ (MAX.)	0.30	0.23	0.18	0.16	0.16	0.12	0.12	0.10		
	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.										
Stability at Low Temperature	Measurement frequency : 120Hz										
	Rated voltage (V)		10	16	25	35	50	63	80	100	
	Impedance ratio ZT / Z20 (MAX.)	Z-40°C / Z+20°C	12	8	6	4	4	3	3	3	
	After continuous application of rated voltage at 125°C and then restoring down to 20°C, the readings of measurements shall meet below.										
Endurance	Case size		φ6.3 × 5.8L	φ6.3 × 7.7L	φ8 to φ12.5	φ16,18 × 16.5L	φ16,18 × 21.5L				
	Endurance time		1000hrs.	2000hrs.	3000hrs.	3500hrs.	4000hrs.				
	Capacitance change		Within ±30% of the initial capacitance value								
	tan δ		300% or less than the initial specified value								
	Leakage current		Less than or equal to the initial specified value								
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.										
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.					Capacitance change					Within ±10% of the initial capacitance value
						tan δ					Less than or equal to the initial specified value
						Leakage current					Less than or equal to the initial specified value
Marking	Black print on the case top.										


Chip Type

(φ 6.3) 【Standard】 ※ φ6.3 × 5.8L : The vibration structure-resistant product can't support.
φ6.3 × 7.7L : The vibration structure-resistant product is available.

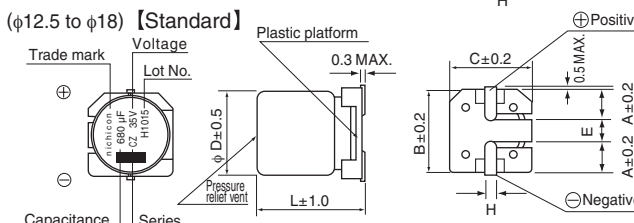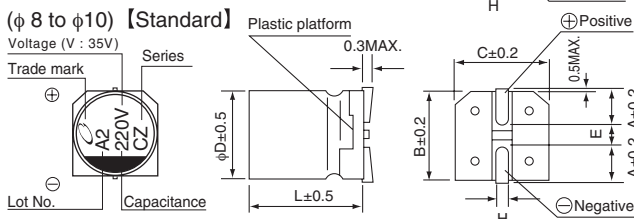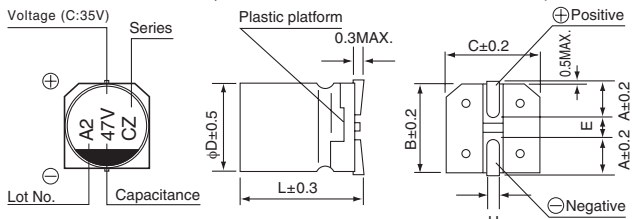


※φ12.5 to φ18 :
The vibration structure-resistant
product is also available upon
request, please ask for details.

Type numbering system (Example : 35V 47μF)

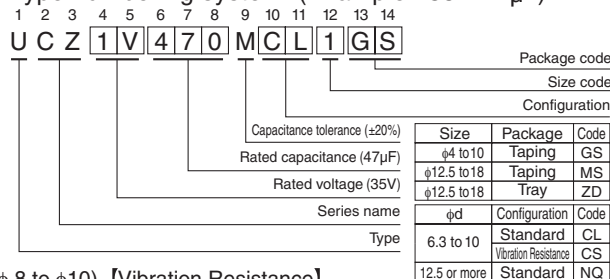

(φ 8 to φ10) 【Vibration Resistance】

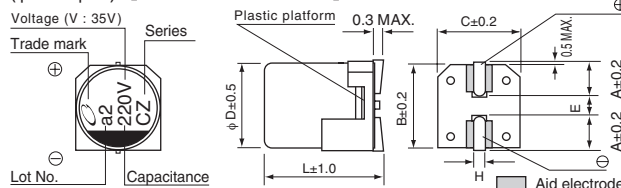

Standard	6.3X5.8	6.3X7.7	8X10	10X10	12.5X13.5	16X16.5	16X21.5	18X16.5	18X21.5
A	2.4	2.4	2.9	3.2	4.8	5.4	5.4	6.4	6.4
B	6.6	6.6	8.3	10.3	13.6	17.1	17.1	19.1	19.1
C	6.6	6.6	8.3	10.3	13.6	17.1	17.1	19.1	19.1
E	2.2	2.2	3.1	4.5	4	6.3	6.3	6.3	6.3
L	5.8	7.7	10	10	13.5	16.5	21.5	16.5	21.5
H	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4

Rated Voltage	V	10	16	25	35	50	63	80	100
Code	A	C	E	V	H	J	K	2A	

Design, Specifications are subject to change without notice.

CONDUCTIVE POLYMER ALUMINUM SOLID ELECTROLYTIC CAPACITORS

CZ series

■ Dimensions

V Cap. (μF) Code	Code	10				16				25				35				50							
		1A				1C				1E				1V				1H							
10	100														6.3×5.8	1.60	24	—	69	6.3×5.8	2.80	42	—	51	
22	220														6.3×5.8	1.60	24	—	69	6.3×7.7	0.50	5	40	197	
33	330									6.3×5.8	1.60	24	—	69	6.3×7.7	0.45	5	40	197	●6.3×7.7 8×10	0.50	5	40	197	
47	470					6.3×5.8	1.60	24	—	69	Recommend 35V➡				●6.3×7.7 8×10	0.45	5	40	197	●6.3×7.7 8×10	0.50	5	40	197	
68	680														8×10	0.20	3	4.5	270						
100	101	Recommend 16V➡				●6.3×7.7 8×10	0.45	5	40	197	●6.3×7.7 8×10	0.45	5	40	197	8×10	0.20	3	4.5	270	10×10	0.20	2.5	4.5	500
220	221	8×10	0.20	3	4.5	270	8×10	0.20	3	4.5	270	●8×10 10×10	0.20	3	4.5	270	10×10	0.15	2	3.5	500				
330	331	●8×10 10×10	0.20	3	4.5	270	10×10	0.15	2	3.5	500	10×10	0.15	2	3.5	500									
390	391																			12.5×13.5	0.100	0.44	4.0	130	
470	471	10×10	0.15	2	3.5	500	10×10	0.15	2	3.5	500									12.5×13.5	0.060	0.34	2.6	200	
560	561																			12.5×13.5	0.060	0.34	2.6	200	
680	681																			12.5×13.5	0.060	0.34	2.6	210	
820	821																			12.5×13.5	0.060	0.34	2.6	210	
1000	102																			12.5×13.5	0.060	0.34	2.6	210	
1200	122																			16×16.5	0.047	0.28	1.4	2400	
1400	142																			16×16.5	0.045	0.28	1.4	2600	
1600	162																			18×16.5	0.045	0.28	1.4	2600	
2200	222																			16×16.5	0.047	0.28	1.4	2400	
2700	272																			16×16.5	0.047	0.28	1.4	2400	
3300	332																			16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4	2400	
																				16×16.5	0.047	0.28	1.4		

V Cap. (μF) Code	Code	63				80				100						
		1J				1K				2A						
10	100	6.3 × 7.7	2.00	100	—	60	8 × 10	0.75	50	—	70	8 × 10	0.75	50	—	70
22	220	8 × 10	0.70	35	—	100	● 8 × 10 10 × 10	0.75	50	—	70	● 8 × 10 10 × 10	0.75	50	—	70
33	330	● 8 × 10 10 × 10	0.70	35	—	100	● 8 × 10 10 × 10	0.75	50	—	70	10 × 10	0.55	35	—	115
47	470	● 8 × 10 10 × 10	0.70	35	—	100	10 × 10	0.55	35	—	115					
82	820											12.5 × 13.5	0.28	1.9	22	700
150	151	12.5 × 13.5	0.20	1.3	14	1000	12.5 × 13.5	0.28	1.9	14	700	16 × 16.5	0.19	1.4	4.8	1000
180	181	12.5 × 13.5	0.20	1.3	14	1000						18 × 16.5	0.17	1.1	3.9	1100
220	221	12.5 × 13.5	0.20	1.3	14	1000						16 × 21.5	0.12	0.8	2.6	1600
270	271						16 × 16.5	0.19	1.4	4.8	1000					
300	301											18 × 21.5	0.11	0.7	2.4	1700
330	331						18 × 16.5	0.17	1.1	3.9	1100					
390	391	16 × 16.5	0.13	0.9	4.8	1900	16 × 21.5	0.12	0.8	2.6	1600					
470	471	18 × 16.5	0.11	0.82	3.9	2000										
520	521						18 × 21.5	0.11	0.7	2.4	1700	Case size φD × L (mm)	Initial 20°C	Initial -40°C	after endurance test -40°C	Rate 8% ripple
560	561	16 × 21.5	0.07	0.46	2.0	2500										
750	751	18 × 21.5	0.068	0.44	1.8	2600										
													ESR			

※ Guaranteed time of ESR after endurance test

Size	Guaranteed time
φ6.3 to φ12.5	2000hrs.
φ16, 18 × 16.5L	2000hrs.
φ16, 18 × 21.5L	3000hrs.

Max. ESR (Ω) at 20°C / -40°C 100kHz, Rated ripple Current (mAmps) at 125°C 100kHz

● : In this case, 6 will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

Design, Specifications are subject to change without notice.

NICHICON CORPORATION