





PSA

華新科技股份有限公司
Walsin Technology Corporation

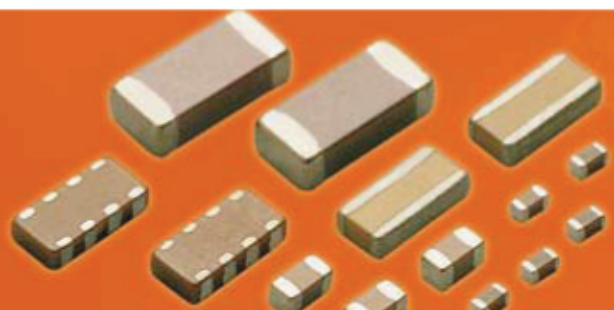

Multilayer Ceramic Capacitors




2010




Product Portfolio



Multilayer Ceramic Capacitors (MLCC)



Chip-Resistor



Disc Capacitors



RF Device and High Frequency Inductors



Varistors and SMD-Varistors

IEC-63 Nominal Resistance / Capacitance

E1	100																							
E3	100				220				470															
E6	100	150	220	330	470	680																		
E12	100	120	150	180	220	270	330	390	470	560	680	820												
E24	100	110	120	130	150	160	180	200	220	240	270	300	330	360	390	430	470	510	560	620	680	750	820	910
E96	100	102	121	124	147	150	178	182	215	221	261	267	316	324	383	392	464	475	562	576	681	698	825	845
	105	107	127	130	154	158	187	191	226	232	274	280	332	340	402	412	487	499	590	604	715	732	866	887
	110	113	133	137	162	165	196	200	237	243	287	294	348	357	422	432	511	523	619	634	750	768	909	931
	115	118	140	143	169	174	205	210	249	255	301	309	365	374	442	453	536	549	649	665	787	806	953	976

E6: $\sqrt[6]{10} \approx 1.46$ E12: $\sqrt[12]{10} \approx 1.21$

E1 series resistance: 1Ω, 10Ω, 100Ω, 1000Ω, 10000Ω, 100000Ω

Table of Contents

www.passivecomponent.com

Subject	Page
Quick Product Information	1
The Outlines and External Dimensions of Capacitors	2
General Purpose Capacitors	3
High Capacitance Capacitors	7
Low Profile Capacitors	9
Ultra-small (0201) Capacitors	10
Middle and High Voltage Capacitors	11
Safety Certificated Capacitors (X1/Y2)	16
Safety Certificated Capacitors (X2/Y3)	17
High Q and Low ESR Capacitors	19
Ultra High Q and Low ESR	21
Open-mode Design Capacitors	23
Low Distortion Capacitors	25
Capacitor Arrays	27
Low Inductance Capacitors	28
Automotive Capacitors qualified to AEC-Q200	29
Automotive Capacitors (Without AEC-Q200 Certification)	31
Soft Termination Capacitors	37
Appendix I : Reliability Test Conditions and Requirements	43
Appendix II : General Information	46

All specifications are subject to change without notice


■ Quick Product Information

Series	Dielectric	Size	Capacitance	Rated voltage	Page
General Purpose Caps	NPO	0402, 0603, 0805, 1206, 1210, 1812	0.5pF~0.039μF	16V, 25V, 50V, 100V	4
	X7R	0402, 0603, 0805, 1206, 1210, 1812	100pF~1μF	10V, 16V, 25V, 50V, 100V	5
	Y5V	0402, 0603, 0805, 1206, 1210, 1812	0.01μF~1μF	6.3V, 10V, 16V, 25V, 50V, 100V	6
High Capacitance Caps	X7R	0402, 0603, 0805, 1206, 1210, 1812	0.1μF~4.7μF	10V, 16V, 25V, 50V	8
	X5R	0402, 0603, 0805, 1206	0.027μF~10μF	6.3V, 10V, 16V	8
	Y5V	0402, 0603, 0805, 1206, 1210, 1812	0.15μF~47μF	6.3V, 10V, 16V, 25V, 35V, 50V	8
Low Profile Caps	X5R	0805, 1206, 1210	1μF~10μF	6.3V, 10V	9
	Y5V	0805, 1206, 1210	2.2μF~10μF	10V, 16V	9
Ultra-small Caps	NPO	0201	0.3pF~100pF	16V, 25V	10
	X7R	0201	100pF~4700pF	16V, 25V, 50V	10
	X5R	0201	1000pF~0.1μF	6.3V, 10V, 16V	10
Middle & High Voltage Caps	NPO	0603, 0805, 1206, 1210, 1808, 1812	0.5pF~6800pF	200V, 250V, 500V, 630V, 1kV, 2kV, 3kV	12
	X7R	0805, 1206, 1210, 1808, 1812	100pF~0.47μF	200V, 250V, 500V, 630V, 1kV, 2kV, 3kV	14
	Y5V	0805, 1206, 1210, 1812	0.01μF~0.68μF	200V, 250V	15
Safety Certificated Caps (X1/Y2)	NPO	1808, 1812	10pF~470pF	250Vac	16
Safety Certificated Caps (X2/Y3)	NPO	1808, 1812	3.9pF~1000pF	250Vac	18
	X7R	1808, 1812	150pF~4700pF	250Vac	18
High Q & Low ESR Caps	NPO	0402, 0603, 0805	0.1pF~3300pF	16V, 50V, 100V	20
Ultra High Q&Low ESR Caps	NPO	0201, 0402, 0603	0.1pF~47pF	25V, 50V, 100V, 250V	22
Open-mode Design Caps	X7R	0805, 1206, 1210, 1812	100pF~1μF	100V, 200V, 250V, 500V	24
Low Distortion Caps	X7R	1206	150pF~0.1μF	100V, 200V, 250V	25
Capacitor Arrays	NPO	0612 (4x0603)	10pF~470pF	50V	27
	X7R	0612 (4x0603)	180pF~0.1μF	16V, 50V	27
	Y5V	0612 (4x0603)	0.01μF~0.1μF	50V	27
Low Inductance Caps	X7R	0612	0.01μF~0.15μF	50V	28
Automotive Capacitors qualified to AEC-Q200	NPO	0402, 0603, 0805	0.5pF~2200pF	10V, 16V, 25V, 50V, 100V	29
Automotive Capacitors (Without AEC-Q200 Certification)	NPO	0402, 0603, 0805, 1206, 1210, 1812	0.5pF~0.033μF	10V, 16V, 25V, 50V, 100V, 200V, 250V	32
	X7R	0402, 0603, 0805, 1206, 1210, 1812	100pF~2.2μF	10V, 16V, 25V, 50V, 100V, 200V, 250V	34
	X5R	0402, 0603, 0805, 1206, 1210	0.01μF~1μF	63V, 10V, 16V, 25V	36
Soft Termination Capacitors	NPO	0805, 1206, 1210, 1808, 1812	0.5pF~8200pF	100V, 200V, 250V, 500V, 630V, 1kV, 2kV, 3kV	38
	X7R	0603, 0805, 1206, 1210, 1812	100pF~22μF	10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V, 1kV, 2kV	40

The Outlines and External Dimensions of Capacitor

www.passivecomponent.com


■ Single Chip Capacitors

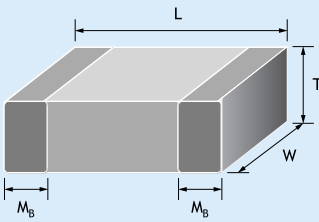Outline	Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		Remark	M _B (mm)
	0201 (0603)	0.6±0.03	0.3±0.03	0.3±0.03		L #	0.15±0.05
	0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05		N #	0.25 +0.05/-0.10
	0603 (1608)	1.60 +0.15/-0.10	0.80±0.10	0.80±0.07		S	0.40±0.15
				0.80+0.15/-0.10		X	
	0805 (2012)	2.00±0.15	1.25±0.10	0.50±0.10		H	0.50±0.20
				0.60±0.10		A	
				0.80±0.10		B	
				1.25±0.10		D #	
				0.85±0.10		T	
	1206 (3216)	3.20±0.15	1.60±0.15	1.25±0.20		I #	0.60±0.20
				0.80±0.10		B	
				0.95±0.10		C #	
				1.25±0.10		D #	
				1.15±0.15		J #	
	1206 (3216)	3.20±0.20	1.60±0.20	1.60±0.20		G #	0.60±0.20
				0.85±0.10		T	
				3.20+0.30/-0.10		1.60+0.30/-0.10	
	1210 (3225)	3.20±0.30	2.50±0.20	0.95±0.10		C #	0.75±0.25
				0.85±0.10		T #	
				1.25±0.10		D #	
1.60±0.20				G #			
2.00±0.20				K #			
1808 (4520)	4.50±0.40	2.03±0.25	2.50±0.30		M #	0.75±0.25	
			1.25±0.10		D #		
			2.00±0.20		K #		
1812 (4532)	4.50±0.40	3.20±0.30	1.25±0.10		D #	0.75±0.25	
			2.00±0.20		K #		
			2.50±0.30		M #		
			2.80±0.30		U #		

Reflow soldering only is recommended.


* For safety certificated products and soft termination product please refer to individual sheet for detail.

■ Capacitor Arrays

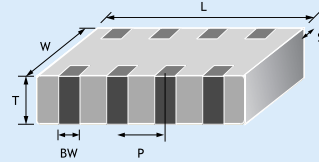Outline	Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		S (mm)	BW (mm)	P (mm)	
	0612 (1632)	3.20±0.15	1.60±0.15	0.80±0.10		B	0.30±0.20	0.40±0.15	0.80±0.15

Reflow soldering only.

■ Low Inductance Capacitors

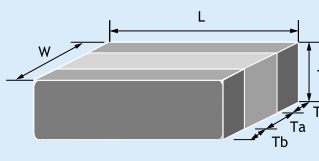Outline	Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		T _a min. (mm)	T _b min. (mm)	
	0612 (1632)	3.20±0.15	1.60±0.15	0.80±0.10		B	0.5	0.13

Reflow soldering only.

■ HOW TO ORDER

1206	F	104	Z	500	C	T
Size Inch (mm) 0402 (1005) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1812 (4532)	Dielectric N=NP0 (C0G) B=X7R F=Y5V	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: R47=0.47pF 0R5=0.5pF 1R0=1.0pF 104=10x10 ⁴ =100nF	Tolerance B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20% Z=-20/+80% (B,C,D for Cap<10pF; F,G,J,K,M,Z for Cap≥10pF)	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 6R3=6.3 VDC 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC 101=100 VDC	Termination L=Ag/Ni/Sn C=Cu/Ni/Sn (Note 1)	Packaging B=Bulk C=Bulk cassette T=7" reeled G=13" reeled

Note 1. Please see product range table to find right termination code.

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0402 (1005)	0.50 ± 0.05	N	10k	50k	-	-
0603 (1608)	0.80 ± 0.07	S	4k	15k	-	-
	0.80 + 0.15 / -0.10	X	4k	15k	-	-
0805 (2012)	0.60 ± 0.10	A	4k	15k	-	-
	0.80 ± 0.10	B	4k	15k	-	-
	1.25 ± 0.10	D	-	-	3k	10k
1206 (3216)	0.80 ± 0.10	B	4k	15k	-	-
	0.95 ± 0.10	C	-	-	3k	10k
	1.15 ± 0.15	J	-	-	3k	10k
	1.25 ± 0.10	D	-	-	3k	10k
	1.60 ± 0.20	G	-	-	2k	-
	1.60 + 0.30 / -0.10	P	-	-	2k	-
1210 (3225)	0.95 ± 0.10	C	-	-	3k	10k
	1.25 ± 0.10	D	-	-	3k	10k
	1.60 ± 0.20	G	-	-	2k	-
	2.50 ± 0.30	M	-	-	1k	-
1812 (4532)	1.25 ± 0.10	D	-	-	1k	-
	2.00 ± 0.20	K	-	-	1k	-

Unit: pieces

General Purpose Capacitors

www.passivecomponent.com

■ CAPACITANCE RANGE

NP0 Dielectric

Dielectric		NPO																	
Size		0402				0603			0805			1206			1210			1812	
Rated Voltage (VDC)		16	25	50	100	16	50	100	16	50	100	16	50	100	16	50	100	50	100
capacitance	0.5pF (0R5)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A								
	0.6pF (0R6)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A								
	0.7pF (0R7)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A								
	0.8pF (0R8)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A								
	0.9pF (0R9)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A								
	1.0pF (1R0)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A								
	1.2pF (1R2)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A								
	1.5pF (1R5)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A	B	B	B					
	1.8pF (1R8)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A	B	B	B					
	2.2pF (2R2)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A	B	B	B					
	2.7pF (2R7)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A	B	B	B					
	3.3pF (3R3)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A	B	B	B				C [^]	
	3.9pF (3R9)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A	B	B	B				C [^]	
	4.7pF (4R7)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A	B	B	B				C [^]	
	5.6pF (5R6)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A	B	B	B				C [^]	
	6.8pF (6R8)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A	B	B	B				C [^]	
	8.2pF (8R2)	N [^]	N [^]	N [^]	N [^]	S	S	S	A	A	A	B	B	B				C [^]	
	10pF (100)	N	N	N	N	S	S	S	A	A	A	B	B	B				C [^]	D [^]
	12pF (120)	N	N	N	N	S	S	S	A	A	A	B	B	B				C [^]	D [^]
	15pF (150)	N	N	N	N	S	S	S	A	A	A	B	B	B				C [^]	D [^]
	18pF (180)	N	N	N	N	S	S	S	A	A	A	B	B	B				C [^]	D [^]
	22pF (220)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]		C [^]	D [^]
	27pF (270)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	33pF (330)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	39pF (390)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	47pF (470)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	56pF (560)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	68pF (680)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	82pF (820)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	100pF (101)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	120pF (121)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	150pF (151)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	180pF (181)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	220pF (221)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	270pF (271)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	330pF (331)	N	N	N	N	S	S	S	A	A	A	B	B	B	C [^]	C [^]	C [^]		D [^]
	390pF (391)	N	N	N	N	S	S	S	B	B	B	B	B	B	C [^]	C [^]	C [^]		D [^]
	470pF (471)	N	N	N	N	S	S	S	B	B	B	B	B	B	C [^]	C [^]	C [^]		D [^]
	560pF (561)					S	S	S	B	B	B	B	B	B	C [^]	C [^]	C [^]		D [^]
	680pF (681)					S	S	S	B	B	B	B	B	B	C [^]	C [^]	C [^]		D [^]
820pF (821)					S	S	S	B	B	B	B	B	B	C [^]	C [^]	C [^]		D [^]	
1,000pF (102)					S	S	S	B	B	B	B	B	B	C [^]	C [^]	C [^]	D [^]	D [^]	
1,200pF (122)					X	X		B	B	B	B	B	B	C [^]	C [^]	C [^]	D [^]	D [^]	
1,500pF (152)					X	X		B	B	B	B	B	B	C [^]	C [^]	C [^]	D [^]	D [^]	
1,800pF (182)					X	X		B	B	B	B	B	B	C [^]	C [^]	C [^]	D [^]	D [^]	
2,200pF (222)					X	X		B	B	B	B	B	B	C [^]	C [^]	C [^]	D [^]	D [^]	
2,700pF (272)					X	X		D	D	D	B	B	B	C [^]	C [^]	C [^]	D [^]	D [^]	
3,300pF (332)					X	X		D	D	D	B	B	B	C [^]	C [^]	C [^]	D [^]	D [^]	
3,900pF (392)								D	D	D	B	B	B	C [^]	C [^]	C [^]	D [^]	D [^]	
4,700pF (472)								D	D		B	B	B	C [^]	C [^]	C [^]	D [^]	D [^]	
5,600pF (562)								D [^]			B	B	B	C [^]	C [^]	C [^]	D [^]	D [^]	
6,800pF (682)								D [^]			C	C	C	C [^]	C [^]	C [^]	D [^]	D [^]	
8,200pF (822)								D [^]			D	D	D	C [^]	C [^]	C [^]	D [^]	D [^]	
0.010μF (103)								D [^]			D	D		C [^]	C [^]	C [^]	D [^]	D [^]	
0.012μF (123)								D [^]			D [^]			C [^]	D [^]	D [^]	D [^]	D [^]	
0.015μF (153)											D [^]			C [^]	D [^]	D [^]	D [^]	D [^]	
0.018μF (183)											D [^]						D [^]	D [^]	
0.022μF (223)											D [^]						D [^]	D [^]	
0.027μF (273)											D [^]						D [^]	D [^]	
0.033μF (333)											D [^]						D [^]	D [^]	
0.039μF (393)											G [^]								

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "A" mark is expressed product with Ag/Ni/Sn terminations.

General Purpose Capacitors

www.passivecomponent.com

X7R Dielectric

Dielectric		X7R																										
Size		0402				0603					0805					1206				1210			1812					
Rated Voltage (VDC)		10	16	25	50	10	16	25	50	100	10	16	25	50	100	16	25	50	100	25	50	100	25	50	100	25	50	100
100pF (101)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B													
120pF (121)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B													
150pF (151)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B									
180pF (181)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B									
220pF (221)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B									
270pF (271)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B									
330pF (331)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B									
390pF (391)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B									
470pF (471)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B									
560pF (561)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B									
680pF (681)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B									
820pF (821)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B									
1,000pF (102)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C						
1,200pF (122)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
1,500pF (152)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
1,800pF (182)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
2,200pF (222)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
2,700pF (272)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
3,300pF (332)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
3,900pF (392)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
4,700pF (472)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
5,600pF (562)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
6,800pF (682)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
8,200pF (822)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
0.010μF (103)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
0.012μF (123)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
0.015μF (153)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
0.018μF (183)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
0.022μF (223)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	D	D	D			
0.027μF (273)	N	N	N	N	S	S	S	S	S	S	B	B	B	B	D	B	B	B	B	C	C	C	D	D	D			
0.033μF (333)	N	N	N	N	S	S	S	X	S	S	B	B	B	B	D	B	B	B	B	C	C	C	D	D	D			
0.039μF (393)	N	N	N	N	S	S	S	X	S	S	B	B	B	B	D	B	B	B	B	C	C	C	D	D	D			
0.047μF (473)	N	N	N	N	S	S	S	X	S	S	B	B	B	B	D	B	B	B	B	C	C	C	D	D	D			
0.056μF (563)	N	N	N	N	S	S	S	X	S	S	B	B	B	B	D	B	B	B	B	C	C	C	D	D	D			
0.068μF (683)	N	N	N	N	S	S	S	X	S	S	B	B	B	B	D	B	B	B	B	C	C	C	D	D	D			
0.082μF (823)	N	N	N	N	S	S	S	X	S	S	B	B	B	B	D	B	B	B	D	C	C	C	D	D	D			
0.10μF (104)	N	N	N	N	S	S	S	X	S	S	B	B	B	B	D	B	B	B	D	C	C	C	D	D	D			
0.12μF (124)					S	S	X	S	S	S	B	B	B	D		B	B	B	D	C	C	C	D	D	D			
0.15μF (154)					S	S	X	S	S	S	D	D	D	D		C	C	C	G	C	C	D	D	D	D			
0.18μF (184)					S	S	X	S	S	S	D	D	D	D		C	C	C	G	C	C	D	D	D	D			
0.22μF (224)					S	S	X	S	S	S	D	D	D	D		C	C	C	G	C	C	D	D	D	D			
0.27μF (274)					X	X	X	S	S	S	D	D	D			C	C	D		C	C	G	D	D	D			
0.33μF (334)					X	X	X	S	S	S	D	D	D	I		C	C	D		C	D	G	D	D	D			
0.39μF (394)					X	X	X	S	S	S	D	D	D			C	J	P		C	D	M	D	D	D			
0.47μF (474)					X	X	X	S	S	S	D	D	D	I		J	J	P		C	D	M	D	D	K			
0.56μF (564)											D	D	D			J	J	P		D	D	M	D	D	K			
0.68μF (684)											D	D	D			J	J	P		D	D	K	D	K	K			
0.82μF (824)											D	D	D			J	J	P		D	D	K	D	K	K			

1. The letter in cell is expressed the symbol of product thickness.

General Purpose Capacitors

www.passivecomponent.com

■ CAPACITANCE RANGE

Y5V Dielectric (0402,0603,0805,Sizes)

Dielectric		Y5V												
Size		0402				0603				0805				
Rated Voltage (VDC)		6.3	10	16	25	50	10	16	25	50	16	25	50	100
capacitance	0.010 μ F (103)		N	N	N	N	S	S	S	S	A	A	A	B
	0.015 μ F (153)		N	N	N	N	S	S	S	S	A	A	A	B
	0.022 μ F (223)		N	N	N	N	S	S	S	S	A	A	A	B
	0.033 μ F (333)		N	N	N	N	S	S	S	S	A	A	A	B
	0.047 μ F (473)		N	N	N	N	S	S	S	S	A	A	A	B
	0.068 μ F (683)		N	N	N	N	S	S	S	S	A	A	A	B
	0.10 μ F (104)		N	N	N	N	S	S	S	S	A	A	A	B
	0.15 μ F (154)		N				S	S	S	S	A	A	A	
	0.22 μ F (224)		N				S	S	S	S	A	A	A	
	0.33 μ F (334)	N	N				S	S	S		B	B	B	
0.47 μ F (474)	N	N				S	S	X		B	B	B		
0.68 μ F (684)	N					S	X	X		B	D	D		

1. The letter in cell is expressed the symbol of product thickness.

Y5V Dielectric (1206,1210,1812 Sizes)

Dielectric		Y5V						
Size		1206			1210		1812	
Rated Voltage (VDC)		25	50	100	50	100	50	100
capacitance	0.010 μ F (103)	B	B	B		C		D
	0.015 μ F (153)	B	B	B		C		D
	0.022 μ F (223)	B	B	B		C		D
	0.033 μ F (333)	B	B	B		C		D
	0.047 μ F (473)	B	B	B		C		D
	0.068 μ F (683)	B	B	B		C		D
	0.10 μ F (104)	B	B	B	C	C	D	D
	0.15 μ F (154)	B	B	C	C	C	D	D
	0.22 μ F (224)	B	B	C	C	C	D	D
	0.33 μ F (334)	B	B		C	C	D	D
0.47 μ F (474)	B	B		C		D	D	
0.68 μ F (684)	B	B		C		D	D	

1. The letter in cell is expressed the symbol of product thickness.

High Capacitance Capacitors

www.passivecomponent.com

■ HOW TO ORDER

1206	F	106	Z	100	C	T
Size Inch (mm) 0402 (1005) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1812 (4532)	Dielectric B=X7R X=X5R S=X6S F=Y5V	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 106=10x10 ⁶ =10μF	Tolerance K=±10% M=±20% Z=-20/+80%	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 6R3=6.3 VDC 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC	Termination C=Cu/Ni/Sn	Packaging B=Bulk C=Bulk cassette T=7"reeled G=13"reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0402 (1005)	0.50 ± 0.05	N	10k	50k	-	-
0603 (1608)	0.80 ± 0.07	S	4k	15k	-	-
	0.80 + 0.15 / -0.10	X	4k	15k	-	-
0805 (2012)	0.80 ± 0.10	B	4k	15k	-	-
	1.25 ± 0.10	D	-	-	3k	10k
	1.25 ± 0.20	I	-	-	3k	10k
1206 (3216)	0.95 ± 0.10	C	-	-	3k	10k
	1.15 ± 0.15	J	-	-	3k	10k
	1.60 ± 0.20	G	-	-	2k	-
	1.60 + 0.30 / -0.10	P	-	-	2k	-
1210 (3225)	0.95 ± 0.10	C	-	-	3k	10k
	1.25 ± 0.10	D	-	-	3k	10k
	1.60 ± 0.20	G	-	-	2k	-
	2.00 ± 0.20	K	-	-	1k	-
	2.50 ± 0.30	M	-	-	1k	-
1812 (4532)	1.25 ± 0.10	D	-	-	1k	-
	2.00 ± 0.20	K	-	-	1k	-
	2.50 ± 0.30	M	-	-	0.5k	-

Unit: pieces

High Capacitance Capacitors

www.passivecomponent.com

■ CAPACITANCE RANGE

X7R Dielectric

Dielectric		X7R																							
Size		0603				0805				1206					1210				1812						
Rated Voltage (VDC)		6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	6.3V	10V	16V	25V	50V	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V
capacitance	0.56μF (564)		X	X																					
	0.68μF (684)		X	X																					
	0.82μF (824)		X	X																					
	1μF (105)	X	X	X				D	D	D		J	J	J	P	D	D	D	D	K	D	D	D	K	K
	1.5μF (155)							I				J	J	J											K
	2.2 (225)						I	I	I	I		J	J	J	P			K	G						M
	3.3 (335)												P	P	P										
	4.7 (475)											P	P	P	P		K	K							
	6.8 (685)																								
	10μF (106)										P	P					K	K							

The letter in cell is expressed the symbol of product thickness.

X5R Dielectric

Dielectric		X5R																			
Size		0402			0603				0805				1206				1210				
Rated Voltage (VDC)		6.3	10	16	6.3	10	16	25	6.3	10	16	25	6.3	10	16	25	10	16			
capacitance	0.027μF (273)			N																	
	0.033μF (333)			N																	
	0.039μF (393)			N																	
	0.047μF (473)			N																	
	0.056μF (563)		N	N																	
	0.068μF (683)		N	N																	
	0.082μF (823)	N	N	N																	
	0.10μF (104)	N	N	N																	
	0.22μF (224)	N					X	X													
	0.33μF (334)	N			X	X	X	X													
	0.47μF (474)	N				X	X	X													
	0.68μF (684)	N			X	X	X	X													
	1.0μF (105)	N			X	X	X	X													
	1.5μF (155)				X					I	I					J	J		K	K	
	2.2μF (225)				X					I	I	I	I			J	J	P	K	K	
	3.3μF (335)									I	I	I	I			P	P	P			
	4.7μF (475)									I	I	I	I			P	P	P	P	K	K
	6.8μF (685)															P	P				
10μF (106)									I						P	P	P	P	K	K	
22μF (226)															P						

1. The letter in cell is expressed the symbol of product thickness.

Y5V Dielectric

Dielectric		Y5V																						
Size		0603				0805				1206					1210					1812				
Rated Voltage (VDC)		6.3	10	16	25	10	16	25	50	10	16	25	35	50	6.3	10	16	25	35	50	16	25	50	100
capacitance	1.0μF (105)		S	X	X	B	B	D	D	C	C	C		C		C	C	C		C	D	D	D	D
	1.5μF (155)		S			D	D			C	C	C				C	C	C			D	D	D	D
	2.2μF (225)	S	S			D	D	I		C	C	C				C	C	C		G	D	D	D	D
	3.3μF (335)					D	D			J	J	J				C	C	C			D	D	D	D
	4.7μF (475)	X				D	D	I		J	J	J	J			C	C	D		G	D	D	D	D
	6.8μF (685)					I				J	J					C	C	D			D	D	D	D
	10μF (106)					I				J	J	P				D	D	G	K		D	D		
	22μF (226)									P							K	K						
	47μF (476)															K	K					M		
	100μF (107)															M								

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other date, please contact WTC local representative.

■ HOW TO ORDER

TT	31	X	225	M	100	C	T
Series TT=Low profile	Size 18=0603 (1608) 21=0805 (2012) 31=1206 (3216) 32=1210 (3225)	Dielectric X=X5R F=Y5V	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 225=22x10 ⁵ =2,200,000pF =2.2μF	Tolerance K=±10% M=±20% Z=-20/+80%	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 6R3=6.3 VDC 100=10 VDC 160=16 VDC	Termination C=Cu/Ni/Sn	Packaging B=Bulk T=7" reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		7" reel	
			Paper tape	Plastic tape
0603 (1608)	0.60	H	4k	-
0805 (2012)	0.95	T	4k	-
1206 (3216)	0.95	T	4k	-
	1.25	J	-	3k
1210 (3225)	0.95	T	-	3k

Unit: pieces

■ CAPACITANCE RANGE

DIELECTRIC		X5R							
SIZE		0603		0805		1206		1210	
Rated Voltage (VDC)		10V	6.3V	10V	16V	6.3V	10V	16V	10V
	0.22 (224)	H							
	1μF (105)			T	T		T	T	
	1.5μF (154)			T	T		T	T	
	2.2 (225)		T	T	T		T	T	
	3.3 (335)						T	T	T
	4.7 (475)		T				T	T	T
	6.8 (685)								
	10μF (106)					J	J		
	2.2μF (226)								

DIELECTRIC		Y5V				
SIZE		0805		1206		1210
Rated Voltage (VDC)		10V	16V	10V	16V	10V
	0.22 (224)					
	1μF (105)					
	1.5μF (154)					
	2.2 (225)		T			
	3.3 (335)	T				
	4.7 (475)	T		T	T	
	6.8 (685)			T		
	10μF (106)			T		T
	2.2μF (226)					

□ Please specify the capacitance tolerance code.

1. This series product is suited to reflow soldering process only.

Ultra-small 0201 Capacitors

www.passivecomponent.com

■ HOW TO ORDER

0201	N	100	J	250	L	T
Size Inch (mm) 0201 (0603)	Dielectric N=NP0 (COG) B=X7R X=X5R	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: R47=0.47pF 0R5=0.5pF 1R0=1.0pF 100=10x10 ⁰ =10pF	Tolerance B=±0.1pF C=±0.25pF D=±0.5pF G=±2% J=±5% K=±10% M=±20% (B,C,D for Cap<10pF; G,J,K,M for Cap≥10pF)	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 6R3=6.3 VDC 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC	Termination L=Ag/Ni/Sn (for NP0 dielectric) C=Cu/Ni/Sn (for X7R, X5R, dielectric)	Packaging T=7"reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol	Paper tape		
		7" reel	13" reel	
0201 (0603)	0.30±0.03	L	15k	-

Unit: pieces

■ CAPACITANCE RANGE

Size	0201		
	NPO		
Dielectric	16	25	50
Rated Voltage (VDC)	16	25	50
capacitance	0.3pF (0R3)	L	L
	0.4pF (0R4)	L	L
	0.5pF (0R5)	L	L
	1.0pF (1R0)	L	L
	1.2pF (1R2)	L	L
	1.5pF (1R5)	L	L
	1.8pF (1R8)	L	L
	2.2pF (2R2)	L	L
	2.7pF (2R7)	L	L
	3.3pF (3R3)	L	L
	3.9pF (3R9)	L	L
	4.7pF (4R7)	L	L
	5.6pF (5R6)	L	L
	6.8pF (6R8)	L	L
	8.2pF (8R2)	L	L
	10pF (100)	L	L
	12pF (120)	L	L
	15pF (150)	L	L
	18pF (180)	L	L
	22pF (220)	L	L
27pF (270)	L	L	
33pF (330)	L	L	
39pF (390)	L	L	
47pF (470)	L	L	
56pF (560)	L	L	
68pF (680)	L	L	
82pF (820)	L	L	
100pF (101)	L	L	

Size	0201								
	X7R				X5R				
Dielectric	6.3V	10V	16V	25V	50V	6.3V	10V	16V	50V
Rated Voltage (VDC)	6.3V	10V	16V	25V	50V	6.3V	10V	16V	50V
capacitance	100pF (101)			L	L	L		L	L
	120pF (121)			L	L	L		L	L
	150pF (151)			L	L	L		L	L
	180pF (181)			L	L	L		L	L
	220pF (221)			L	L	L		L	L
	270pF (271)			L	L	L		L	L
	330pF (331)			L	L	L		L	L
	390pF (391)			L	L	L		L	L
	470pF (471)			L	L	L		L	L
	560pF (561)			L	L	L		L	L
	680pF (681)			L	L	L		L	L
	820pF (821)			L	L	L		L	L
	1,000pF (102)	L	L	L	L	L		L	L
	1,500pF (152)	L	L	L				L	L
	2,200pF (222)	L	L	L				L	L
	3,300pF (332)	L	L	L				L	L
	4,700pF (472)	L	L	L				L	L
	6,800pF (682)	L	L					L	
	0.010μF (103)	L	L					L	L
	0.015μF (153)							L	
	0.022μF (223)							L	
	0.033μF (333)							L	
	0.047μF (473)							L	
	0.068μF (683)							L	
	0.10μF (104)							L	

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local sales representative.

Middle and High Voltage Capacitors

www.passivecomponent.com

■ HOW TO ORDER

1808	N	100	G	202	L	T
Size Inch (mm) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1808 (4520) 1812 (4532)	Dielectric N=NP0 (C0G) B=X7R F=Y5V	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: R47=0.47pF 0R5=0.5pF 1R0=1.0pF 100=10x10 ⁰ =10pF	Tolerance B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20% Z=-20/+80% (B,C,D for Cap<10pF; G,J,K,M,Z for Cap≥10pF)	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 201=200 VDC 251=250 VDC 501=500 VDC 631=630 VDC 102=1000 VDC 202=2000 VDC 302=3000 VDC	Termination L=Ag/Ni/Sn C=Cu/Ni/Sn (Note 1)	Packaging B=Bulk T=7"reeled G=13"reeled

Note 1. Please see product range table to find right termination code.

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0603 (1608)	0.80 ± 0.07	S	4k	15k	-	-
0805 (2012)	0.60 ± 0.10	A	4k	15k	-	-
	0.80 ± 0.10	B	4k	15k	-	-
1206 (3216)	1.25 ± 0.10	D	-	-	3k	10k
	0.80 ± 0.10	B	4k	15k	-	-
	0.95 ± 0.10	C	-	-	3k	10k
	1.25 ± 0.10	D	-	-	3k	10k
1210 (3225)	1.60 ± 0.20	G	-	-	2k	-
	0.95 ± 0.10	C	-	-	3k	10k
	1.25 ± 0.10	D	-	-	3k	10k
	1.60 ± 0.20	G	-	-	2k	-
1808 (4520)	2.50 ± 0.30	M	-	-	1k	-
	1.25 ± 0.10	D	-	-	2k	-
	2.00 ± 0.20	K	-	-	1k	-
1812 (4532)	1.25 ± 0.10	D	-	-	1k	-
	2.00 ± 0.20	K	-	-	1k	-

Unit: pieces

Middle and High Voltage Capacitors

www.passivecomponent.com

■ CAPACITANCE RANGE NP0 Dielectric 200V to 630V

Dielectric		NP0																	
Size		0603		0805				1206				1210				1812			
Rated Voltage (VDC)		200	250	200	250	500	630	200	250	500	630	200	250	500	630	200	250	500	630
capacitance	0.5pF (0R5)	S	S	A	A	A	A												
	1.0pF (1R0)	S	S	A	A	A	A												
	1.2pF (1R2)	S	S	A	A	A	A												
	1.5pF (1R5)	S	S	A	A	A	A	B	B	B	B								
	1.8pF (1R8)	S	S	A	A	A	A	B	B	B	B								
	2.2pF (2R2)	S	S	A	A	A	A	B	B	B	B								
	2.7pF (2R7)	S	S	A	A	A	A	B	B	B	B								
	3.3pF (3R3)	S	S	A	A	A	A	B	B	B	B								
	3.9pF (3R9)	S	S	A	A	A	A	B	B	B	B								
	4.7pF (4R7)	S	S	A	A	A	A	B	B	B	B								
	5.6pF (5R6)	S	S	A	A	A	A	B	B	B	B								
	6.8pF (6R8)	S	S	A	A	A	A	B	B	B	B								
	8.2pF (8R2)	S	S	A	A	A	A	B	B	B	B								
	10pF (100)	S	S	A	A	A	A	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	12pF (120)	S	S	A	A	A	A	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	15pF (150)	S	S	A	A	A	A	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	18pF (180)	S	S	A	A	A	A	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	22pF (220)	S	S	A	A	A	A	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	27pF (270)	S	S	A	A	A	A	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	33pF (330)	S	S	A	A	A	A	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	39pF (390)	S	S	A	A	A	A	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	47pF (470)	S	S	A	A	A	A	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	56pF (560)	S	S	A	A	A	A	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	68pF (680)	S	S	A	A	A	A	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	82pF (820)	S	S	A	A	B	B	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	100pF (101)	S	S	A	B	B	B	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	120pF (121)	S	S	A	B	D	D	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	150pF (151)	S	S	B	D	D	D	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	180pF (181)	S	S	B	D	D	D	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	220pF (221)	S	S	D	D	D	D	B	B	B	B	C^	C^	C^	C^	D^	D^	D^	D^
	270pF (271)			D	D	D	D	B	C	C	C	C^	C^	C^	C^	D^	D^	D^	D^
	330pF (331)			D	D	D	D	B	C	C	C	C^	C^	C^	C^	D^	D^	D^	D^
	390pF (391)			D	D	D	D	B	C	C	C	C^	C^	C^	C^	D^	D^	D^	D^
	470pF (471)			D				C	C	C	C	C^	C^	C^	C^	D^	D^	D^	D^
560pF (561)			D				C	D	D	D	C^	C^	C^	C^	D^	D^	D^	D^	
680pF (681)			D				C	D	D	D	C^	C^	C^	C^	D^	D^	D^	D^	
820pF (821)			D				C	G	G	G	C^	C^	C^	C^	D^	D^	D^	D^	
1,000pF (102)			D				C	G	G	G	D^	D^	D^	D^	D^	D^	D^	D^	
1,200pF (122)							C				D^	D^	D^	D^	D^	D^	D^	D^	
1,500pF (152)							D				D^	D^	D^	D^	D^	D^	D^	D^	
1,800pF (182)							D				D^	D^	D^	D^	D^	D^	D^	D^	
2,200pF (222)							D				D^	D^			D^	D^	D^	D^	
2,700pF (272)											D^	D^			D^	D^	D^	D^	
3,300pF (332)											D^				D^	D^	D^	D^	
3,900pF (392)											D^				D^				
4,700pF (472)															D^				
5,600pF (562)															D^				
6,800pF (682)															D^				

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "A" mark is expressed product with Ag/Ni/Sn terminations.

NP0 Dielectric 1kV to 3kV

Dielectric		NP0									
Size		1206		1210		1808			1812		
Rated Voltage (VDC)		1000	2000	1000	2000	1000	2000	3000	1000	2000	3000
capacitance	1.5pF (1R5)	B	B								
	1.8pF (1R8)	B	B								
	2.2pF (2R2)	B	B			D	D	D			
	2.7pF (2R7)	B	B			D	D	D			
	3.3pF (3R3)	B	B			D	D	D			
	3.9pF (3R9)	B	B			D	D	D			
	4.7pF (4R7)	B	B			D	D	D			
	5.6pF (5R6)	B	B			D	D	D			
	6.8pF (6R8)	B	B			D	D	D			
	8.2pF (8R2)	B	B			D	D	D			
	10pF (100)	B	B	C	C	D	D	D	D	D	D
	12pF (120)	B	B	C	C	D	D	D	D	D	D
	15pF (150)	B	B	C	C	D	D	D	D	D	D
	18pF (180)	B	B	C	C	D	D	D	D	D	D
	22pF (220)	B	B	C	C	D	D	D	D	D	D
	27pF (270)	B	B	C	C	D	D	D	D	D	D
	33pF (330)	B	C	C	C	D	D	D	D	D	D
	39pF (390)	B	C	C	C	D	D	D	D	D	D
	47pF (470)	C	C	C	C	D	D	D	D	D	D
	56pF (560)	C	D	C	D	D	D	D	D	D	D
	68pF (680)	C	D	C	D	D	D	D	D	D	D
	82pF (820)	D	D	C	D	D	D	D	D	D	D
	100pF (101)	D	D	D	D	D	D	K	D	D	D
	120pF (121)	D	G	D	D	D	D	K	D	D	D
	150pF (151)	D	G	D	G	D	K	K	D	D	D
	180pF (181)	G	G	D	G	D	K	K	D	D	K
	220pF (221)	G	G	G	G	D	K	K	D	D	K
	270pF (271)	G		G		K	K	K	D	K	K
	330pF (331)	G		G		K	K	K	D	K	K
	390pF (391)	G		G		K	K		D	K	K
470pF (471)	G		G		K	K		K	K	K	
560pF (561)					K	K		K	K		
680pF (681)					K	K		K	K		
820pF (821)					K			K	K		
1,000pF (102)					K			K	K		
1,200pF (122)								K			
1,500pF (152)								K			

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "A" mark is expressed product with Ag/Ni/Sn terminations.

Middle and High Voltage Capacitors

www.passivecomponent.com

X7R Dielectric 200V to 630V

Dielectric		X7R															
Size		0805				1206				1210				1812			
Rated Voltage (VDC)		200	250	500	630	200	250	500	630	200	250	500	630	200	250	500	630
capacitance	100pF (101)	B	B	B [^]	B [^]												
	120pF (121)	B	B	B [^]	B [^]												
	150pF (151)	B	B	B [^]	B [^]	D	D	D	D								
	180pF (181)	B	B	B [^]	B [^]	D	D	D	D								
	220pF (221)	B	B	B [^]	B [^]	D	D	D	D								
	270pF (271)	B	B	B [^]	B [^]	D	D	D	D								
	330pF (331)	B	B	B [^]	B [^]	D	D	D	D								
	390pF (391)	B	B	B [^]	B [^]	D	D	D	D								
	470pF (471)	B	B	B [^]	B [^]	D	D	D	D								
	560pF (561)	B	B	B [^]	B [^]	D	D	D	D								
	680pF (681)	B	B	B [^]	B [^]	D	D	D	D								
	820pF (821)	B	B	B [^]	B [^]	D	D	D	D								
	1,000pF (102)	B	B	B [^]	B [^]	D	D	D	D	C	C	D	D	D	D	D	D
	1,200pF (122)	B	B	B [^]	B [^]	D	D	D	D	C	C	D	D	D	D	D	D
	1,500pF (152)	B	B	B [^]	B [^]	D	D	D	D	C	C	D	D	D	D	D	D
	1,800pF (182)	B	B	B [^]	B [^]	D	D	D	D	C	C	D	D	D	D	D	D
	2,200pF (222)	B	B	B [^]	B [^]	D	D	D	D	C	C	D	D	D	D	D	D
	2,700pF (272)	B	B	B [^]	B [^]	D	D	D	D	C	C	D	D	D	D	D	D
	3,300pF (332)	B	B	B [^]	B [^]	D	D	D	D	C	C	D	D	D	D	D	D
	3,900pF (392)	B	B			D	D	D	D	C	C	D	D	D	D	D	D
	4,700pF (472)	B	B			D	D	D	D	C	C	D	D	D	D	D	D
	5,600pF (562)	D	D			D	D	D	D	C	C	D	D	D	D	D	D
	6,800pF (682)	D	D			D	D	D	D	C	C	D	D	D	D	D	D
	8,200pF (822)	D	D			D	D	D	D	C	C	D	D	D	D	D	D
	0.010μF (103)	D	D			D	D	D	D	C	C	D	D	D	D	D	D
	0.012μF (123)	D	D			D	D	D	D	C	C	D	D	D	D	D	D
	0.015μF (153)	D	D			D	D	D	D	C	C	D	D	D	D	D	D
	0.018μF (183)	D	D			D	D	D	D	C	C	D	D	D	D	D	D
	0.022μF (223)	D	D			D	D	G	G	C	C	D	D	D	D	D	D
	0.027μF (273)					D	D	G	G	C	C	G	G	D	D	D	D
	0.033μF (333)					G	G	G	G	C	C	G	G	D	D	D	D
	0.039μF (393)					G	G			C	C	G	G	D	D	D	D
	0.047μF (473)					G	G			D	D	G	G	D	D	D	D
	0.056μF (563)					G	G			D	D	G	G	D	D	K	K
	0.068μF (683)					G	G			G	G			D	D	K	K
	0.082μF (823)					G	G			G	G			D	D	K	K
	0.10μF (104)					G	G			G	G			D	D	K	K
	0.12μF (124)									G	G			D	D		
	0.15μF (154)									M	M			K	K		
	0.18μF (184)									M	M			K	K		
0.22μF (224)									M	M			K	K			
0.27μF (274)									M	M			K	K			
0.33μF (334)									M	M			K	K			
0.39μF (394)									M	M			K	K			
0.47μF (474)									M	M			K	K			

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with " ^ " mark is expressed product with Ag/Ni/Sn terminations.

X7R Dielectric 1kV to 3kV

Dielectric		X7R								
Size		1206		1210	1808			1812		
Rated Voltage (VDC)		1000	2000	1000	1000	2000	3000	1000	2000	3000
capacitance	150pF (151)	D	D		D	D	D			
	180pF (181)	D	D		D	D	D			
	220pF (221)	D	D		D	D	D			
	270pF (271)	D	D		D	D	D	D	D	
	330pF (331)	D	D		D	D	K	D	D	
	390pF (391)	D	D		D	D	K	D	D	
	470pF (471)	D	D		D	D	K	D	D	
	560pF (561)	D	D		D	D	K	D	D	
	680pF (681)	D	D		D	D	K	D	D	K
	820pF (821)	D	G		D	D	K	D	D	K
	1,000pF (102)	D	G	D	D	K	K	D	D	K
	1,200pF (122)	D	G [^]	D	D	K		D	D	
	1,500pF (152)	D	G [^]	D	D	K		D	D	
	1,800pF (182)	D		D	D	K		D	G	
	2,200pF (222)	D		D	D	K [^]		D	G	
	2,700pF (272)	D		D	D			D	G	
	3,300pF (332)	D		D	D			D	K	
	3,900pF (392)	D		G	D			D	K	
	4,700pF (472)	D		G	D			D	K	
	5,600pF (562)	D		G	K			D		
6,800pF (682)	D		G	K			D			
8,200pF (822)	D		G	K			D			
0.010μF (103)	D		G	K			D			
0.012μF (123)							K			
0.015μF (153)							K			

1. The letter in cell is expressed the symbol of product thickness.

Y5V Dielectric 200V to 250V

Dielectric		Y5V							
Size		0805		1206		1210		1812	
Rated Voltage (VDC)		200	250	200	250	200	250	200	250
capacitance	0.010μF (103)	B	B	B	B	C	C	D	D
	0.015μF (153)	B	B	B	B	C	C	D	D
	0.022μF (223)	B	B	B	B	C	C	D	D
	0.033μF (333)	B	B	B	B	C	C	D	D
	0.047μF (473)	B	B	B	B	C	C	D	D
	0.068μF (683)	B	B	B	B	C	C	D	D
	0.10μF (104)			B	B	C	C	D	D
	0.15μF (154)			C	C	C	C	D	D
	0.22μF (224)							D	D
	0.33μF (334)							D	D
	0.47μF (474)							D	D
	0.68μF (684)							D	D
	1.0μF (105)								

1. The letter in cell is expressed the symbol of product thickness.

Safety Certificated Capacitors X1/Y2

www.passivecomponent.com



■ HOW TO ORDER

S2	42	N	100	J	502	L	T
Series S2=X1/Y2	Size 42=1808 (4520) 43=1812 (4532) 52=2211 (5728)	Dielectric N=NP0 (C0G) B=X7R	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 100=10x10 ⁰ =10pF	Tolerance J=±5% K=±10%	Peak Impulse Voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 302=3000 VDC 502=5000 V Impulse Voltage	Termination L=Ag/Ni/Sn	Packaging B=Bulk T=7" reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		7" reel / Paper tape
1808 (4520)	1.25±0.10	D	2k
	2.00±0.20	K	1k
1812 (4532)	1.25±0.10	D	1k
	2.00±0.20	K	1k
2211 (5728)	1.60±0.20	G	1k
	2.00±0.20	K	1k
	2.50±0.30	M	0.5k

Unit: pieces

■ CAPACITANCE RANGE

Dielectric		NPO		X7R		
Rated Voltage (VAC)		250		250		
Rated Voltage (VDC)		3000		3000		
Peak Impulse Voltage		5000		5000		
Size	1808	1812	1808	1812	2211	
capacitance	10pF (100)	D				
	12pF (120)	D	D			
	15pF (150)	D	D			
	18pF (180)	D	D			
	22pF (220)	D	D			
	27pF (270)	D	D			
	33pF (330)	D	D			
	39pF (390)	D	D			
	47pF (470)	D	D			
	56pF (560)	D	D			
	68pF (680)	D	D			
	82pF (820)	D	D			
	100pF (101)	D	D	G		
	120pF (121)	D	D	G		
	150pF (151)	D	D	G	G	G
	180pF (181)	K	D	G	G	G
	220pF (221)	K	D	G	G	G
	270pF (271)	K	K	K	G	G
	330pF (331)		K	K	G	G
	390pF (391)		K	K	G	G
	470pF (471)		K	K	G	K
	560pF (561)			K	G	K
680pF (681)			K	K	K	
820pF (821)			K	K	K	
1000pF (102)			K	M	M	
1200pF (122)					M	
1500pF (152)					M	
1800pF (182)					M	
2200pF (222)					M	

1. The letter in cell is expressed the symbol of product thickness.

Safety Certificated Capacitors X2/Y3

www.passivecomponent.com



■ HOW TO ORDER

S3	42	N	100	J	202	L	T
Series S3=X2/Y3	Size 42=1808 (4520) 43=1812 (4532)	Dielectric N=NP0 (C0G) B=X7R	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. Eg.: R47=0.47pF 0R5=0.5pF 1R0=1.0pF 100=10x10 ⁰ =10pF	Tolerance C=±0.25pF D=±0.5pF J=±5% K=±10% (C,D for Cap<10pF; J,K for Cap≥10pF)	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 202=2000 VDC 302=3000 VDC	Termination L=Ag/Ni/Sn	Packaging B=Bulk T=7"reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		7" reel / Paper tape
1808 (4520)	1.25±0.10	D	2k
	2.00±0.20	K	1k
1812 (4532)	1.25±0.10	D	1k
	2.00±0.20	K	1k

Unit: pieces

Safety Certificated Capacitors X2/Y3

www.passivecomponent.com

■ CAPACITANCE RANGE

NP0 Dielectric

Dielectric		NPO			
Size		1808		1812	
Rated Voltage (VAC)		250		250	
Rated Voltage (VDC)		2000	3000	2000	3000
capacitance	3.9pF (3R9)		D*		
	4.7pF (4R7)		D*		
	5.0pF (5R0)		D*		
	5.6pF (5R6)		D*		
	6.8pF (6R8)		D*		
	8.2pF (8R2)		D*		
	10pF (100)	D	D	D*	D*
	12pF (120)	D	D	D	D
	15pF (150)	D	D	D	D
	18pF (180)	D	D	D	D
	22pF (220)	D	D	D	D
	27pF (270)	D	D	D	D
	33pF (330)	D	D	D	D
	39pF (390)	D	D	D	D
	47pF (470)	D	D	D	D
	56pF (560)	D	D	D	D
	68pF (680)	D	D	D	D
	82pF (820)	D	D	D	D
	100pF (101)	D	D	D	D
	120pF (121)	D	D	D	D
	150pF (151)	D	D	D	D
	180pF (181)	D	K	D	D
	220pF (221)	D	K	D	D
	270pF (271)	D	K	D	K
	330pF (331)	D		D	K
	390pF (391)	K		D	K
	470pF (471)	K		D	K
	560pF (561)	K		D	
680pF (681)	K		K		
820pF (821)			K		
1,000pF (102)			K		

** means it is only available for UL safety certificated.

1. The letter in cell is expressed the symbol of product thickness.

X7R Dielectric

Dielectric		X7R			
Size		1808		1812	
Rated Voltage (VAC)		250		250	
Rated Voltage (VDC)		2000	3000	2000	3000
capacitance	150pF (151)	D			
	180pF (181)	D			
	220pF (221)	D			
	270pF (271)	D		D	
	330pF (331)	D	K*	D	
	390pF (391)	D	K*	D	
	470pF (471)	D	K*	D	
	560pF (561)	D	K	D	
	680pF (681)	D	K	D	K
	820pF (821)	D	K	D	K
	1,000pF (102)	K	K	D	K
	1,200pF (122)	K		D	
	1,500pF (152)	K		D	
	1,800pF (182)	K		D	
	2,200pF (222)	K		D	
	2,700pF (272)			D	
	3,300pF (332)			K	
	3,900pF (392)			K	
4,700pF (472)			K		

** means it is only available for UL safety certificated.

1. The letter in cell is expressed the symbol of product thickness.

High Q and Low ESR Capacitors

www.passivecomponent.com

■ HOW TO ORDER



HH	15	N	100	G	500	L	T
Series	Size	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
HH= High Q/Low ESR	15=0402 (1005) 18=0603 (1608) 21=0805 (2012)	N=NP0 (COG)	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: R47=0.47pF 0R5=0.5pF 1R0=1.0pF 100=10x10 ⁰ =10pF	A=±0.05pF B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 160=16 VDC 250=25 VDC 500=50 VDC 101=100 VDC	L=Ag/Ni/Sn	T=7"reeled G=13"reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape	
			7" reel	13" reel
0402	0.50±0.05	N	10k	20k
0603	0.80±0.07	S	4k	15k
0805	0.60±0.10	A	4k	15k

Unit: pieces

■ ELECTRICAL CHARACTERISTICS

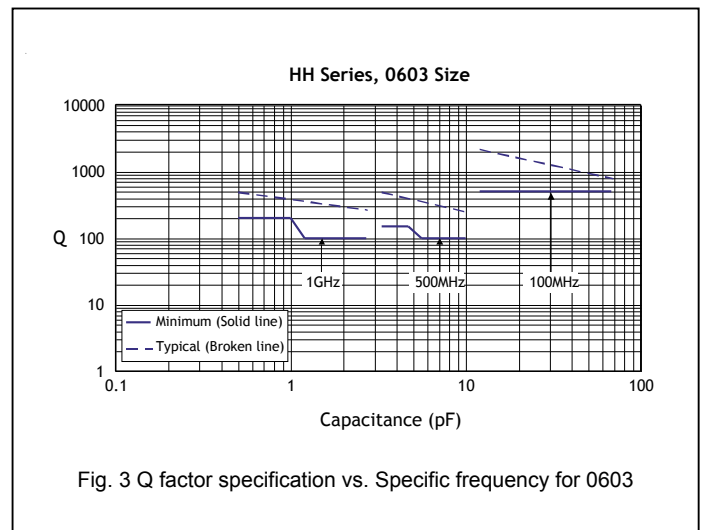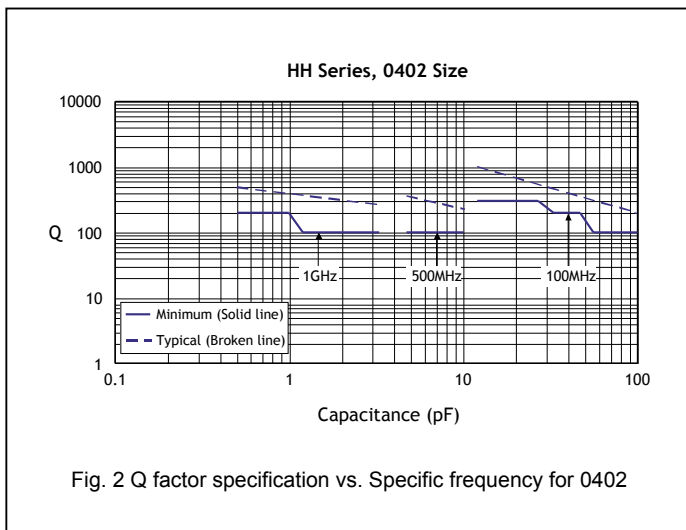

High Q and Low ESR Capacitors

www.passivecomponent.com

■ CAPACITANCE RANGE

Dielectric		NPO								
Size		0402			0603				0805	
Rated Voltage (VDC)		16V	25V	50V	16V	25V	50V	100V	50V	100V
capacitance	0.1pF (0R1)	N	N	N						
	0.2pF (0R2)	N	N	N						
	0.3pF (0R3)	N	N	N						
	0.4pF (0R4)	N	N	N						
	0.5pF (0R5)	N	N	N	S	S	S	S	A	A
	0.6pF (0R6)	N	N	N	S	S	S	S	A	A
	0.7pF (0R7)	N	N	N	S	S	S	S	A	A
	0.8pF (0R8)	N	N	N	S	S	S	S	A	A
	0.9pF (0R9)	N	N	N	S	S	S	S	A	A
	1.0pF (1R0)	N	N	N	S	S	S	S	A	A
	1.2pF (1R2)	N	N	N	S	S	S	S	A	A
	1.5pF (1R5)	N	N	N	S	S	S	S	A	A
	1.8pF (1R8)	N	N	N	S	S	S	S	A	A
	2.2pF (2R2)	N	N	N	S	S	S	S	A	A
	2.7pF (2R7)	N	N	N	S	S	S	S	A	A
	3.3pF (3R3)	N	N	N	S	S	S	S	A	A
	3.9pF (3R9)	N	N	N	S	S	S	S	A	A
	4.7pF (4R7)	N	N	N	S	S	S	S	A	A
	5.6pF (5R6)	N	N	N	S	S	S	S	A	A
	6.8pF (6R8)	N	N	N	S	S	S	S	A	A
	8.2pF (8R2)	N	N	N	S	S	S	S	A	A
	10pF (100)	N	N	N	S	S	S	S	A	A
	12pF (120)	N	N	N	S	S	S	S	A	A
	15pF (150)	N	N	N	S	S	S	S	A	A
	18pF (180)	N	N	N	S	S	S	S	A	A
	22pF (220)	N	N	N	S	S	S	S	A	A
	27pF (270)	N	N	N	S	S	S	S	A	A
	33pF (330)	N	N	N	S	S	S	S	A	A
	39pF (390)	N	N	N	S	S	S	S	A	A
	47pF (470)	N	N	N	S	S	S	S	A	A
	56pF (560)	N	N	N	S	S	S	S	A	A
	68pF (680)	N	N	N	S	S	S	S	A	A
	82pF (820)	N	N	N	S	S	S	S	A	A
100pF (101)	N	N	N	S	S	S	S	A	A	
120pF (121)	N	N	N	S	S	S	S	A	A	
150pF (151)	N	N	N	S	S	S	S	A	A	
180pF (181)	N	N	N	S	S	S	S			
220pF (221)	N	N	N	S	S	S	S			
270pF (271)	N	N		S	S	S	S			
330pF (331)	N	N		S	S	S	S			
390pF (391)	N	N		S	S	S	S			
470pF (471)	N	N		S	S	S	S			
560pF (561)				S	S	S				
680pF (681)				S	S	S				
820pF (821)				S	S	S				
1,000pF (102)				S	S	S				
1,200pF (122)				X						
1,500pF (152)				X						
1,800pF (182)				X						
2,200pF (222)				X						
2,700pF (272)				X						
3,300pF (332)				X						

1. The letter in cell is expressed the symbol of product thickness.

■ HOW TO ORDER

RF	15	N	100	G	500	C	T
Series RF=Ultra High Q and Low ESR	Size 03=0201 (0603) 15=0402 (1005) 18=0603 (1608)	Dielectric N=NP0 (COG)	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. Eg.: R47=0.47pF 0R5=0.5pF 1R0=1.0pF 100=10x10 ⁰ =10pF	Tolerance A=±0.05pF B=±0.1pF C=±0.25pF F=±1% G=±2% J=±5% A for Cap<5pF; B,C,D for Cap<10pF; F,G,J for Cap≥10pF)	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 250=25 VDC 500=50 VDC 101=100 VDC 251=250 VDC	Termination C=Cu/Ni/Su	Packaging B=Bulk C=Bulk cassette T=7"reeled G=13"reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape	
			7" reel	13" reel
0201	0.30±0.03	L	15k	-
0402	0.50±0.05	N	10k	20k
0603	0.80±0.07	S	4k	15k

Unit: pieces

Ultra High Q and Low ESR

www.passivecomponent.com

■ CAPACITANCE RANGE

Dielectric		NPO					
Size	0201	0402			0603		
Rated Voltage (VDC)	25V	50V	100V	50V	100V	250V	
capacitance	0.1pF (0R1)	L	N	N			
	0.2pF (0R2)	L	N	N			
	0.3pF (0R3)	L	N	N			
	0.4pF (0R4)	L	N	N	S	S	S
	0.5pF (0R5)	L	N	N	S	S	S
	0.6pF (0R6)	L	N	N	S	S	S
	0.7pF (0R7)	L	N	N	S	S	S
	0.8pF (0R8)	L	N	N	S	S	S
	0.9pF (0R9)	L	N	N	S	S	S
	1.0pF (1R0)	L	N	N	S	S	S
	1.2pF (1R2)	L	N	N	S	S	S
	1.5pF (1R5)	L	N	N	S	S	S
	1.8pF (1R8)	L	N	N	S	S	S
	2.0pF (2R0)	L	N	N	S	S	S
	2.2pF (2R2)	L	N	N	S	S	S
	2.7pF (2R7)	L	N	N	S	S	S
	3.0pF (3R0)	L	N	N	S	S	S
	3.3pF (3R3)	L	N	N	S	S	S
	3.9pF (3R9)	L	N	N	S	S	S
	4.0pF (4R0)	L	N	N	S	S	S
	4.7pF (4R7)	L	N	N	S	S	S
	5.0pF (5R0)	L	N	N	S	S	S
	5.6pF (5R6)	L	N	N	S	S	S
	6.0pF (6R0)	L	N	N	S	S	S
	6.8pF (6R8)	L	N	N	S	S	S
	7.0pF (7R0)	L	N	N	S	S	S
	8.0pF (8R0)	L	N	N	S	S	S
	8.2pF (8R2)	L	N	N	S	S	S
	9.0pF (9R0)	L	N	N	S	S	S
	10pF (100)	L	N	N	S	S	S
12pF (120)	L	N		S	S	S	
15pF (150)	L	N		S	S	S	
18pF (180)	L	N		S	S	S	
22pF (220)		N		S	S	S	
27pF (270)				S	S	S	
33pF (330)				S	S	S	
39pF (390)				S	S	S	
47pF (470)				S	S	S	

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

■ HOW TO ORDER

OP	32	B	103	K	201	C	T
Series OP=Open-mode	Size 21=0805 (2012) 31=1206 (3216) 32=1210 (3225) 43=1812 (4532)	Dielectric B=X7R	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 102=10x10 ² =1000pF	Tolerance K=±10% M=±20%	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 101=100 VDC 201=200 VDC 251=250 VDC 501=500 VDC	Termination L=Ag/Ni/Sn C=Cu/Ni/Sn (Note 1)	Packaging B=Bulk T=7"reeled G=13"reeled




Note 1: Please see below product rang table to find right termination code.

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0805	0.80 ± 0.10	B	4k	15k	-	-
	1.25 ± 0.10	D	-	-	3k	10k
1206	0.80 ± 0.10	B	4k	15k	-	-
	0.95 ± 0.10	C	-	-	3k	10k
	1.25 ± 0.10	D	-	-	3k	10k
1210	1.60 ± 0.20	G	-	-	2k	-
	0.95 ± 0.10	C	-	-	3k	10k
	1.25 ± 0.10	D	-	-	3k	10k
	1.60 ± 0.20	G	-	-	2k	-
1812	2.50 ± 0.30	M	-	-	1k	-
	1.25 ± 0.10	D	-	-	1k	-
	2.00 ± 0.20	K	-	-	1k	-

Unit: pieces

■ INNER CONSTRUCTION OF OPEN-MODE DESIGN

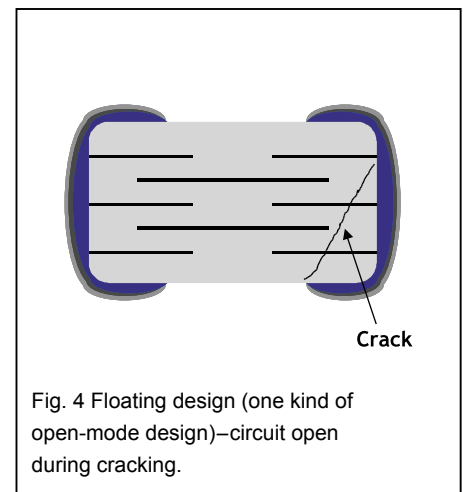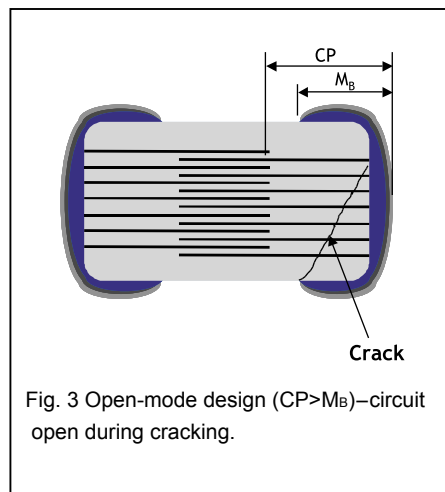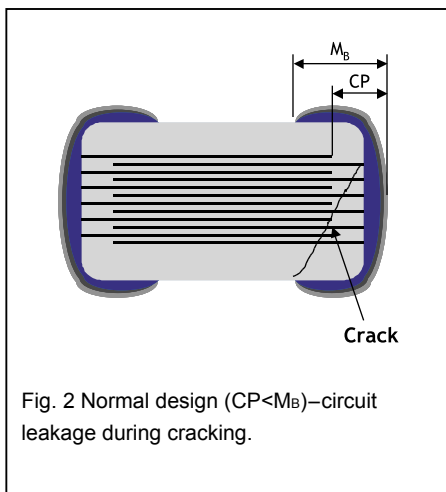

Open-mode Design Capacitors

www.passivecomponent.com

■ CAPACITANCE RANGE

Dielectric		X7R															
Size		0805				1206				1210				1812			
Rated Voltage (VDC)		100	200	250	500	100	200	250	500	100	200	250	500	100	200	250	500
capacitance	100pF (101)	B	B	B	B [^]												
	120pF (121)	B	B	B	B [^]												
	150pF (151)	B	B	B	B [^]	B	D	D	D								
	180pF (181)	B	B	B	B [^]	B	D	D	D								
	220pF (221)	B	B	B	B [^]	B	D	D	D								
	270pF (271)	B	B	B	B [^]	B	D	D	D								
	330pF (331)	B	B	B	B [^]	B	D	D	D								
	390pF (391)	B	B	B	B [^]	B	D	D	D								
	470pF (471)	B	B	B	B [^]	B	D	D	D								
	560pF (561)	B	B	B	B [^]	B	D	D	D								
	680pF (681)	B	B	B	B [^]	B	D	D	D								
	820pF (821)	B	B	B	B [^]	B	D	D	D								
	1,000pF (102)	B	B	B	B [^]	B	D	D	D	C	C	C	D	D	D	D	D
	1,200pF (122)	B	B	B	B [^]	B	D	D	D	C	C	C	D	D	D	D	D
	1,500pF (152)	B	B	B	B [^]	B	D	D	D	C	C	C	D	D	D	D	D
	1,800pF (182)	B	B	B	B [^]	B	D	D	D	C	C	C	D	D	D	D	D
	2,200pF (222)	B	B	B	B [^]	B	D	D	D	C	C	C	D	D	D	D	D
	2,700pF (272)	B	B	B	B [^]	B	D	D	D	C	C	C	D	D	D	D	D
	3,300pF (332)	B	B	B	B [^]	B	D	D	D	C	C	C	D	D	D	D	D
	3,900pF (392)	B	B	B		B	D	D	D	C	C	C	D	D	D	D	D
	4,700pF (472)	B	B	B		B	D	D	D	C	C	C	D	D	D	D	D
	5,600pF (562)	B	D	D		B	D	D	D	C	C	C	D	D	D	D	D
	6,800pF (682)	B	D	D		B	D	D	D	C	C	C	D	D	D	D	D
	8,200pF (822)	B	D	D		B	D	D	D	C	C	C	D	D	D	D	D
	0.010μF (103)	B	D	D		B	D	D	D	C	C	C	D	D	D	D	D
	0.012μF (123)	B	D	D		B	D	D	D	C	C	C	D	D	D	D	D
	0.015μF (153)	B	D	D		B	D	D	D	C	C	C	D	D	D	D	D
	0.018μF (183)	B	D	D		B	D	D	D	C	C	C	D	D	D	D	D
	0.022μF (223)	B	D	D		B	D	D	G	C	C	C	D	D	D	D	D
	0.027μF (273)	D				B	D	D	G	C	C	C	G	D	D	D	D
	0.033μF (333)	D				B	G	G	G	C	C	C	G	D	D	D	D
	0.039μF (393)	D				B	G	G		C	C	C	G	D	D	D	D
	0.047μF (473)	D				B	G	G		C	D	D	G	D	D	D	D
	0.056μF (563)					B	G	G		C	D	D	G	D	D	D	K
	0.068μF (683)					B	G	G		C	G	G		D	D	D	K
	0.082μF (823)					B	G	G		C	G	G		D	D	D	K
	0.10μF (104)					D	G	G		C	G	G		D	D	D	K
	0.12μF (124)					D				C	G	G		D	D	D	
	0.15μF (154)					G				D	M	M		D	K	K	
	0.18μF (184)					G				D	M	M		D	K	K	
0.22μF (224)					G				D	M	M		D	K	K		
0.27μF (274)									G				D	K	K		
0.33μF (334)									G				D	K	K		
0.39μF (394)									M				D	K	K		
0.47μF (474)									M				K	K	K		
0.56μF (564)									M				K				
0.68μF (684)													K				
0.82μF (824)													K				
1.0μF (105)													K				

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with " ^ " mark is expressed product with Ag/Ni/Sn terminations.

■ HOW TO ORDER

LD	31	B	102	K	201	L	T
Series LD=Low Distortion	Size 31=1206 (3216)	Dielectric B=X7R D=X7E	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. Eg.: 102=10x10 ² =1000pF	Tolerance K=±10% M=±20%	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 101=100 VDC 201=200 VDC 251=250 VDC 351=350 VDC 501=500 VDC 631=630 VDC	Termination L=Ag/Ni/Sn	Packaging B=Bulk T=7"reeled G=13"reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Paper tape	
			7" reel	13" reel	7" reel	13" reel
1206	1.25±0.10	D	-	-	3k	10k

Unit: pieces

Low Distortion Capacitors

www.passivecomponent.com

■ CAPACITANCE RANGE

Dielectric		X7R / X7E					
Size		1206					
Rated Voltage (VDC)		100	200	250	350	500	630
capacitance	100pF (101)						
	120pF (121)						
	150pF (151)	D	D	D	D	D	D
	180pF (181)	D	D	D	D	D	D
	220pF (221)	D	D	D	D	D	D
	270pF (271)	D	D	D	D	D	D
	330pF (331)	D	D	D	D	D	D
	390pF (391)	D	D	D	D	D	D
	470pF (471)	D	D	D	D	D	D
	560pF (561)	D	D	D	D	D	D
	680pF (681)	D	D	D	D	D	D
	820pF (821)	D	D	D	D	D	D
	1000pF (102)	D	D	D	D	D	D
	1200pF (122)	D	D	D	D	D	D
	1500pF (152)	D	D	D	D	D	D
	1800pF (182)	D	D	D	D	D	D
	2200pF (222)	D	D	D	D	D	D
	2700pF (272)	D	D	D	D	D	D
	3300pF (332)	D	D	D	D	D	D
	3900pF (392)	D	D	D	D	D	D
	4700pF (472)	D	D	D	D	D	D
	5600pF (562)	D	D	D	D	D	D
	6800pF (682)	D	D	D	D	D	D
	8200pF (822)	D	D	D	D	D	D
	0.010μF (103)	D	D	D	D	D	D
	0.012μF (123)	D	D	D	D	D	D
	0.015μF (153)	D	D	D	D	D	D
	0.018μF (183)	D	D	D	D	G	G
	0.022μF (223)	D	D	D	D	G	G
	0.027μF (273)	D	D	D	D	G	G
	0.033μF (333)	D	D	D	D	G	G
	0.039μF (393)	D	D	D	D		
	0.047μF (473)	D	D	D	D		
0.056μF (563)	D						
0.068μF (683)	D						
0.082μF (823)	D						
0.1μF (104)	D						

1. The letter in cell is expressed the symbol of product thickness.

■ HOW TO ORDER

Y	4C	3	B	103	K	500	C	T
Series Y=Capacitor Array	Cap. Nr. 4C=4xCap	Termination pitch 3=0.03" pitch	Dielectric N=NP0 (C0G) B=X7R F=Y5V	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 103=10x10 ³ =10,000pF =10nF	Tolerance J=±5% K=±10% M=±20% Z=-20%~+80%	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 160=16 VDC 250=25 VDC 500=50 VDC	Termination C=Cu/Ni/Sn	Packaging T=7"reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape	
			7" reel	13" reel
4 x 0603	0.80±0.10	B	4k	-

Unit: pieces

■ CAPACITANCE RANGE

Size	4 x 0603					
	Dielectric	NPO	X7R			Y5V
	Rated Voltage (VDC)	50	16	25	50	16 50
capacitance	10pF (100)	B				
	15pF (150)	B				
	22pF (220)	B				
	33pF (330)	B				
	47pF (470)	B				
	68pF (680)	B				
	100pF (101)	B				
	150pF (151)	B				
	180pF (181)	B		B	B	
	220pF (221)	B		B	B	
	330pF (331)	B		B	B	
	470pF (471)	B		B	B	
	1,000pF (102)			B	B	
	1,500pF (152)			B	B	
	2,200pF (222)			B	B	
	3,300pF (332)			B	B	
	4,700pF (472)			B	B	
	6,800pF (682)			B	B	
	0.010µF (103)			B	B	B
	0.015µF (153)		B	B	B	B
0.022µF (223)		B	B	B	B	
0.033µF (333)		B			B	
0.047µF (473)		B			B	
0.068µF (683)		B				
0.10µF (104)		B			B B	

1. The letter in cell is expressed the symbol of product thickness.

Low Inductance Capacitors

www.passivecomponent.com

■ HOW TO ORDER

0612	B	103	K	500	C	T
Size Inch (mm) 0612 (1632)	Dielectric B=X7R	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 103=10x10 ³ =10nF	Tolerance K=±10% M=±20%	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 500=50 VDC	Termination C=Cu/Ni/Sn	Packaging T=7"reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol	7" reel / Paper tape
0612 (1632)	0.80±0.10 B	4k

Unit: pieces

■ CAPACITANCE RANGE

Size	X7R
Dielectric	0612
Rated Voltage (VDC)	50
10nF (103)	B
12nF (123)	B
15nF (153)	B
18nF (183)	B
22nF (223)	B
27nF (273)	B
33nF (333)	B
39nF (393)	B
47nF (473)	B
56nF (563)	B
68nF (683)	B
82nF (823)	B
100nF (104)	B
120nF (124)	B
150nF (154)	B

1. The letter in cell is expressed the symbol of product thickness.

■ HOW TO ORDER

MT	18	N	102	J	500	C	T
Series MT= Automotive safe concern (with AEC-Q200 qualification)	Size 15=0402 (1005) 18=0603 (1608) 21=0805 (2012)	Dielectric N=NP0 (COG)	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 0R5=0.5pF 1R0=1.0pF 102=10x102 =1000pF	Tolerance B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5%	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC 101=100 VDC 201=200 VDC	Termination C=Cu/Ni/Sn	Packaging T=7" reeled G=13" reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0402 (1005)	0.50±0.05	N	10k	50k	-	-
0603 (1608)	0.80±0.07	S	4k	15k	-	-
	0.80+0.15/-0.10	X	4k	15k	-	-
0805 (2012)	0.60±0.10	A	4k	15k	-	-
	0.80±0.10	B	4k	15k	-	-
	1.25±0.10	D	-	-	3k	10k
	1.25±0.20	I	-	-	3k	10k

Unit: pieces

Automotive Capacitors qualified to AEC-Q200

www.passivecomponent.com

■ CAPACITANCE RANGE

Dielectric		NPO														
Size		0402				0603						0805				
Rated Voltage		10	16	25	50	10	16	25	50	100	200	10	16	25	50	100
capacitance	0.5pF (0R5)					S	S	S	S	S	S	A	A	A	A	A
	0.6pF (0R6)					S	S	S	S	S	S	A	A	A	A	A
	0.7pF (0R7)					S	S	S	S	S	S	A	A	A	A	A
	0.8pF (0R8)					S	S	S	S	S	S	A	A	A	A	A
	0.9pF (0R9)					S	S	S	S	S	S	A	A	A	A	A
	1.0pF (1R0)					S	S	S	S	S	S	A	A	A	A	A
	1.2pF (1R2)					S	S	S	S	S	S	A	A	A	A	A
	1.5pF (1R5)					S	S	S	S	S	S	A	A	A	A	A
	1.8pF (1R8)					S	S	S	S	S	S	A	A	A	A	A
	2.2pF (2R2)					S	S	S	S	S	S	A	A	A	A	A
	2.7pF (2R7)					S	S	S	S	S	S	A	A	A	A	A
	3.3pF (3R3)					S	S	S	S	S	S	A	A	A	A	A
	3.9pF (3R9)					S	S	S	S	S	S	A	A	A	A	A
	4.7pF (4R7)					S	S	S	S	S	S	A	A	A	A	A
	5.6pF (5R6)					S	S	S	S	S	S	A	A	A	A	A
	6.8pF (6R8)					S	S	S	S	S	S	A	A	A	A	A
	8.2pF (8R2)					S	S	S	S	S	S	A	A	A	A	A
	10pF (100)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	12pF (120)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	15pF (150)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	18pF (180)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	22pF (220)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	27pF (270)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	33pF (330)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	39pF (390)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	47pF (470)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	56pF (560)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	68pF (680)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	82pF (820)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	100pF (101)	N	N	N	N	S	S	S	S	S	S	A	A	A	A	A
	120pF (121)					S	S	S	S			A	A	A	A	A
	150pF (151)					S	S	S	S			A	A	A	A	A
180pF (181)					S	S	S	S			A	A	A	A	A	
220pF (221)					S	S	S	S			A	A	A	A	A	
270pF (271)					S	S	S	S			A	A	A	A	A	
330pF (331)					S	S	S	S			A	A	A	A	A	
390pF (391)					S	S	S	S			B	B	B	B	B	
470pF (471)					S	S	S	S			B	B	B	B	B	
560pF (561)					S	S	S	S			B	B	B	B	B	
680pF (681)					S	S	S	S			B	B	B	B	B	
820pF (821)					S	S	S	S			B	B	B	B	B	
1,000pF (102)					S	S	S	S			B	B	B	B	B	
1,200pF (122)											B	B	B	B		
1,500pF (152)											B	B	B	B		
1,800pF (182)											B	B	B	B		
2,200pF (222)											B	B	B	B		

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Automotive Capacitors (Without AEC-Q200 Certification)

www.passivecomponent.com

■ HOW TO ORDER

MG	31	B	104	K	500	C	T
Series MG= Automotive (without AEC-Q200 certification)	Size 15=0402 (1005) 18=0603 (1608) 21=0805 (2012) 31=1206 (3216) 32=1210 (3225) 43=1812 (4532)	Dielectric N=NP0 (C0G) B=X7R X=X5R	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 0R5=0.5pF 1R0=1.0pF 104=10x104=100nF	Tolerance B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20%	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC 101=100 VDC 201=200 VDC 251=250 VDC	Termination C=Cu/Ni/Sn (for NP0, X7R, X5R dielectric) L=Ag/Ni/Sn (for partial NP0 items)	Packaging T=7" reeled R=7" reeled (2mm pitch for 0603 size; paper tape) G=13" reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0402 (1005)	0.50±0.05	N	10k	50k	-	-
0603 (1608)	0.80±0.07	S	4k	15k	-	-
	0.80+0.15/-0.10	X	4k	15k	-	-
0805 (2012)	0.60±0.10	A	4k	15k	-	-
	0.80±0.10	B	4k	15k	-	-
	1.25±0.10	D	-	-	3k	10k
	1.25±0.20	I	-	-	3k	10k
1206 (3216)	0.80±0.10	B	4k	15k	-	-
	0.95±0.10	C	-	-	3k	10k
	1.15±0.15	J	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	10k
	1.60+0.30/-0.10	P	-	-	2k	-
1210 (3225)	0.95±0.10	C	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	-
	2.00±0.20	K	-	-	1k	-
	2.50±0.30	M	-	-	1k	-
1812 (4532)	1.25±0.10	D	-	-	1k	-
	2.00±0.20	K	-	-	1k	-

Unit: pieces

Automotive Capacitors (Without AEC-Q200 Certification)

www.passivecomponent.com

■ CAPACITANCE RANGE

NP0 Dielectric 0402, 0603, 0805 Sizes

Dielectric		NP0																		
Size		0402					0603						0805							
Rated Voltage		10	16	25	50	100	10	16	25	50	100	200	250	10	16	25	50	100	200	250
capacitance	0.5pF (0R5)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	0.6pF (0R6)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	0.7pF (0R7)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	0.8pF (0R8)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	0.9pF (0R9)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	1.0pF (1R0)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	1.2pF (1R2)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	1.5pF (1R5)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	1.8pF (1R8)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	2.2pF (2R2)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	2.7pF (2R7)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	3.3pF (3R3)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	3.9pF (3R9)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	4.7pF (4R7)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	5.6pF (5R6)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	6.8pF (6R8)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	8.2pF (8R2)	N^	N^	N^	N^	N^	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	10pF (100)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	12pF (120)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	15pF (150)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	18pF (180)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	22pF (220)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	27pF (270)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	33pF (330)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	39pF (390)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	47pF (470)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	56pF (560)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	68pF (680)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	82pF (820)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	A
	100pF (101)	N	N	N	N	N	S	S	S	S	S	S	S	A	A	A	A	A	A	B
	120pF (121)	N	N	N	N	N	S	S	S	S	S			A	A	A	A	A	A	B
	150pF (151)	N	N	N	N	N	S	S	S	S	S			A	A	A	A	A	B	D
	180pF (181)	N	N	N	N	N	S	S	S	S	S			A	A	A	A	A	B	D
	220pF (221)	N	N	N	N	N	S	S	S	S	S			A	A	A	A	A	D	D
	270pF (271)						S	S	S	S	S			A	A	A	A	A	D	D
	330pF (331)						S	S	S	S	S			A	A	A	A	A	D	D
	390pF (391)						S	S	S	S	S			B	B	B	B	B	D	D
	470pF (471)						S	S	S	S	S			B	B	B	B	B	D	
	560pF (561)						S	S	S	S	S			B	B	B	B	B	D	
	680pF (681)						S	S	S	S	S			B	B	B	B	B	D	
820pF (821)						S	S	S	S	S			B	B	B	B	B	D		
1,000pF (102)						S	S	S	S	S			B	B	B	B	B			
1,200pF (122)													B	B	B	B	B			
1,500pF (152)													B	B	B	B	B			
1,800pF (182)													B	B	B	B	B			
2,200pF (222)													B	B	B	B	B			
2,700pF (272)													D	D	D	D	D			
3,300pF (332)																				
3,900pF (392)																				
4,700pF (472)																				
5,600pF (562)																				
6,800pF (682)																				
8,200pF (822)																				
0.010μF (103)																				
0.012μF (123)																				

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "A" mark is expressed product with Ag/Ni/Sn terminations.
3. For more information about products with special capacitance or other data, please contact WTC local representative.

Automotive Capacitors (Without AEC-Q200 Certification)

www.passivecomponent.com

NP0 Dielectric 1206, 1210, 1812 Sizes (Continued)

Dielectric		NPO																		
Size		1206							1210							1812				
Rated Voltage		10	16	25	50	100	200	250	10	16	25	50	100	200	250	16	50	100	200	250
capacitance	1.0pF (1R0)																			
	1.2pF (1R2)																			
	1.5pF (1R5)	B	B	B	B	B	B	B												
	1.8pF (1R8)	B	B	B	B	B	B	B												
	2.2pF (2R2)	B	B	B	B	B	B	B												
	2.7pF (2R7)	B	B	B	B	B	B	B												
	3.3pF (3R3)	B	B	B	B	B	B	B												
	3.9pF (3R9)	B	B	B	B	B	B	B												
	4.7pF (4R7)	B	B	B	B	B	B	B												
	5.6pF (5R6)	B	B	B	B	B	B	B												
	6.8pF (6R8)	B	B	B	B	B	B	B												
	8.2pF (8R2)	B	B	B	B	B	B	B												
	10pF (100)	B	B	B	B	B	B	B					C	C	C			D	D	D
	12pF (120)	B	B	B	B	B	B	B					C	C	C			D	D	D
	15pF (150)	B	B	B	B	B	B	B					C	C	C			D	D	D
	18pF (180)	B	B	B	B	B	B	B					C	C	C			D	D	D
	22pF (220)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	27pF (270)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	33pF (330)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	39pF (390)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	47pF (470)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	56pF (560)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	68pF (680)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	82pF (820)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	100pF (101)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	120pF (121)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	150pF (151)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	180pF (181)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	220pF (221)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	270pF (271)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	330pF (331)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	390pF (391)	B	B	B	B	B	B	B	C	C	C	C	C	C	C			D	D	D
	470pF (471)	B	B	B	B	B	B	C	C	C	C	C	C	C	C			D	D	D
	560pF (561)	B	B	B	B	B	C	D	C	C	C	C	C	C	C			D	D	D
	680pF (681)	B	B	B	B	B	C	D	C	C	C	C	C	C	C			D	D	D
	820pF (821)	B	B	B	B	B	C	G	C	C	C	C	C	C	C			D	D	D
	1,000pF (102)	B	B	B	B	B	C	G	C	C	C	C	C	D	D	D	D	D	D	D
	1,200pF (122)	B	B	B	B	B	C		C	C	C	C	C	D	D	D	D	D	D	D
	1,500pF (152)	B	B	B	B	B	D		C	C	C	C	C	D	D	D	D	D	D	D
	1,800pF (182)	B	B	B	B	B	D		C	C	C	C	C	D	D	D	D	D	D	D
	2,200pF (222)	B	B	B	B	B	D		C	C	C	C	C	D	D	D	D	D	D	D
	2,700pF (272)	B	B	B	B	B			C	C	C	C	C	D	D	D	D	D	D	D
3,300pF (332)	B	B	B	B	B			C	C	C	C	C	D		D	D	D	D	D	
3,900pF (392)	B	B	B	B	B			C	C	C	C	C	D		D	D	D	D	D	
4,700pF (472)	B	B	B	B	B			C	C	C	C	C			D	D	D	D		
5,600pF (562)	B	B	B	B	B			C	C	C	C	C			D	D	D	D		
6,800pF (682)								C	C	C	C	C			D	D	D	D		
8,200pF (822)								C	C	C	C	C			D	D	D			
0.010μF (103)								C	C	C	C	C			D	D	D			
0.012μF (123)								C	C	D	D	D			D	D	D			
0.015μF (153)								C	C	D	D	D			D	D	D			
0.018μF (183)															D	D	D			
0.022μF (223)															D	D	D			
0.027μF (273)															D	D	D			
0.033μF (333)															D	D	D			
0.039μF (393)																				

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "A" mark is expressed product with Ag/Ni/Sn terminations.
3. For more information about products with special capacitance or other data, please contact WTC local representative.

Automotive Capacitors (Without AEC-Q200 Certification)

www.passivecomponent.com

X7R Dielectric 0402, 0603, 0805 Sizes

Dielectric		X7R															
Size		0402				0603					0805						
Rated Voltage		10	16	25	50	10	16	25	50	100	10	16	25	50	100	200	250
capacitance	100pF (101)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	120pF (121)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	150pF (151)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	180pF (181)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	220pF (221)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	270pF (271)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	330pF (331)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	390pF (391)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	470pF (471)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	560pF (561)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	680pF (681)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	820pF (821)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	1,000pF (102)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	1,200pF (122)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	1,500pF (152)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	1,800pF (182)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	2,200pF (222)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	2,700pF (272)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	3,300pF (332)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	3,900pF (392)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	4,700pF (472)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B
	5,600pF (562)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	D
	6,800pF (682)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	D
	8,200pF (822)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	D
	0.010μF (103)	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	D
	0.012μF (123)	N	N	N		S	S	S	S		B	B	B	B	B	B	D
	0.015μF (153)	N	N	N		S	S	S	S		B	B	B	B	B	B	D
	0.018μF (183)	N	N	N		S	S	S	S		B	B	B	B	B	B	D
	0.022μF (223)	N	N	N		S	S	S	S		B	B	B	B	B	B	D
	0.027μF (273)	N	N	N		S	S	S	S		B	B	B	B	B	D	
	0.033μF (333)	N	N	N		S	S	S	X		B	B	B	B	B	D	
	0.039μF (393)	N	N	N		S	S	S	X		B	B	B	B	B	D	
	0.047μF (473)	N	N	N		S	S	S	X		B	B	B	B	B	D	
	0.056μF (563)	N	N			S	S	S	X		B	B	B	B	B	D	
	0.068μF (683)	N	N			S	S	S	X		B	B	B	B	B	D	
	0.082μF (823)	N	N			S	S	S	X		B	B	B	B	B	D	
0.10μF (104)	N	N			S	S	S	X		B	B	B	B	B	D		
0.12μF (124)					S	S	X			D	D	D	D				
0.15μF (154)					S	S	X			D	D	D	D				
0.18μF (184)					S	S	X			D	D	D	D				
0.22μF (224)					S	S	X			D	D	D	D				
0.27μF (274)					X	X				D	D	D					
0.33μF (334)					X	X				D	D	D					
0.39μF (394)					X	X				D	D	D					
0.47μF (474)					X	X				D	D	D					
0.56μF (564)										D	D	D					
0.68μF (684)										D	D	D					
0.82μF (824)										D	D	D					
1.00μF (105)																	

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Automotive Capacitors (Without AEC-Q200 Certification)

www.passivecomponent.com

X7R Dielectric 1206, 1210, 1812 Sizes(Continued)

Dielectric		X7R																				
Size		1206						1210						1812								
Rated Voltage		10	16	25	50	100	200	250	10	16	25	50	100	200	250	10	16	25	50	100	200	250
capacitance	100pF (101)																					
	120pF (121)																					
	150pF (151)	B	B	B	B	B	D	D														
	180pF (181)	B	B	B	B	B	D	D														
	220pF (221)	B	B	B	B	B	D	D														
	270pF (271)	B	B	B	B	B	D	D														
	330pF (331)	B	B	B	B	B	D	D														
	390pF (391)	B	B	B	B	B	D	D														
	470pF (471)	B	B	B	B	B	D	D														
	560pF (561)	B	B	B	B	B	D	D														
	680pF (681)	B	B	B	B	B	D	D														
	820pF (821)	B	B	B	B	B	D	D														
	1,000pF (102)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	1,200pF (122)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	1,500pF (152)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	1,800pF (182)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	2,200pF (222)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	2,700pF (272)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	3,300pF (332)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	3,900pF (392)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	4,700pF (472)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	5,600pF (562)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	6,800pF (682)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	8,200pF (822)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	0.010μF (103)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	0.012μF (123)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	0.015μF (153)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	0.018μF (183)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	0.022μF (223)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	0.027μF (273)	B	B	B	B	B	D	D	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	0.033μF (333)	B	B	B	B	B	G	G	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	0.039μF (393)	B	B	B	B	B	G	G	C	C	C	C	C	C	C	D	D	D	D	D	D	D
	0.047μF (473)	B	B	B	B	B	G	G	C	C	C	C	C	D	D	D	D	D	D	D	D	D
	0.056μF (563)	B	B	B	B	B	G	G	C	C	C	C	C	D	D	D	D	D	D	D	D	D
	0.068μF (683)	B	B	B	B	B	G	G	C	C	C	C	C	G	G	D	D	D	D	D	D	D
0.082μF (823)	B	B	B	B	D	G	G	C	C	C	C	C	G	G	D	D	D	D	D	D	D	
0.10μF (104)	B	B	B	B	D	G	G	C	C	C	C	C	G	G	D	D	D	D	D	D	D	
0.12μF (124)	B	B	B	B	D			C	C	C	C	C	G	G	D	D	D	D	D	D	D	
0.15μF (154)	C	C	C	C	G			C	C	C	C	D	M	M	D	D	D	D	D	K	K	
0.18μF (184)	C	C	C	C	G			C	C	C	C	D	M	M	D	D	D	D	D	K	K	
0.22μF (224)	C	C	C	C	G			C	C	C	C	D	M	M	D	D	D	D	D	K	K	
0.27μF (274)	C	C	C	D				C	C	C	C	G	M	M	D	D	D	D	D	K	K	
0.33μF (334)	C	C	C	D				C	C	C	D	G	M	M	D	D	D	D	D	K	K	
0.39μF (394)	C	C	J	P				C	C	C	D	M	M	M	D	D	D	D	D	K	K	
0.47μF (474)	J	J	J	P				C	C	C	D	M	M	M	D	D	D	D	K	K	K	
0.56μF (564)	J	J	J	P				D	D	D	D	M			D	D	D	D	K			
0.68μF (684)	J	J	J	P				D	D	D	D	K			D	D	D	K	K			
0.82μF (824)	J	J	J	P				D	D	D	D	K			D	D	D	K	K			
1.00μF (105)	J	J	J	P				D	D	D	D	K			D	D	D	K	K			
1.50μF (155)	J	J	P					K	K	G									K			
2.20μF (225)	J	J	P					K	K	G									M			

1. The letter in cell is expressed the symbol of product thickness.
 2. For more information about products with special capacitance or other data, please contact WTC local representative.

Automotive Capacitors (Without AEC-Q200 Certification)

www.passivecomponent.com

X5R Dielectric

Dielectric		X5R																	
Size		0402			0603				0805				1206				1210		
Rated Voltage (VDC)		6.3	10	16	6.3	10	16	25	6.3	10	16	25	6.3	10	16	25	10	16	
capacitance	0.027 μ F (273)																		
	0.033 μ F (333)																		
	0.039 μ F (393)																		
	0.047 μ F (473)																		
	0.056 μ F (563)		N																
	0.068 μ F (683)		N																
	0.082 μ F (823)		N																
	0.10 μ F (104)		N	N															
	0.15 μ F (154)																		
	0.22 μ F (224)	N																	
	0.27 μ F (274)	N				X	X	X											
	0.33 μ F (334)	N				X	X	X											
	0.39 μ F (394)	N				X	X	X											
	0.47 μ F (474)	N				X	X	X											
	0.68 μ F (684)	N				X	X	X											
	0.82 μ F (824)				X	X	X	X											
	1.0 μ F (105)				X	X	X	X											
	1.5 μ F (155)								I	I					J	J	P	K	K
	2.2 μ F (225)								I	I					J	J	P	K	K
	3.3 μ F (335)													P	P	P	P	K	K
4.7 μ F (475)													P	P	P	P	K	K	
6.8 μ F (685)													P	P					
10 μ F (106)													P	P					
22 μ F (226)																			

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Soft Termination Capacitors

www.passivecomponent.com

■ HOW TO ORDER

SH	31	B	104	K	500	C	T
Series SH=Soft termination	Size 18=0603 (1608) 21=0805 (2012) 31=1206 (3216) 32=1210 (3225) 42=1808 (4520) 43=1812 (4532)	Dielectric B=X7R N=NP0 (C0G)	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. Eg. 104=10x10 ⁴ =100nF	Tolerance B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20%	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC 101=100VDC 201=200 VDC 251=250 VDC 501=500 VDC 631=630 VDC 102=1000 VDC 202=2000 VDC	Termination C=Cu/Ni/Sn	Packaging T=7" reeled G=13" reeled

■ PACKAGING DIMENSION AND QUANTITY

Size	L (mm)	W (mm)	Thickness (mm)/Symbol		Paper tape		Plastic tape	
					7" reel	13" reel	7" reel	13" reel
0603 (1608)	1.60±0.20	0.80±0.10	0.80±0.07	S	4k	15k	-	-
	1.60+0.20/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10	X	4k	15k	-	-
0805 (2012)	2.00±0.20	1.25±0.10	0.60±0.10	A	4k	15k	-	-
			0.80±0.10	B	4k	15k	-	-
			1.25±0.10	D	-	-	3k	10k
	2.00+0.25/-0.2	1.25±0.20	1.25±0.20	I	-	-	3k	10k
1206 (3216)	3.20+0.4/-0.1	1.60±0.15	0.80±0.10	B	4k	15k	-	-
			0.95±0.10	C	-	-	3k	10k
			1.15±0.15	J	-	-	3k	10k
			1.25±0.10	D	-	-	3k	10k
	3.20+0.4/-0.1	1.60±0.20	1.60±0.20	G	-	-	2k	-
3.20+0.4/-0.1	1.60+0.30/-0.10	1.60+0.30/-0.10	P	-	-	2k	-	
1210 (3225)	3.20±0.40	2.50±0.20	0.95±0.10	C	-	-	3k	10k
			1.25±0.10	D	-	-	3k	10k
	3.20±0.50	2.50±0.30	1.60±0.20	G	-	-	2k	-
			2.00±0.20	K	-	-	1k	-
			2.50±0.30	M	-	-	1k	-
1808 (4520)	4.50+0.60/-0.4	2.03±0.25	1.25±0.10	D	-	-	2k	-
			2.00±0.20	K	-	-	1k	-
1812 (4532)	4.50+0.60/-0.4	3.20±0.30	1.25±0.10	D	-	-	1k	-
			2.00±0.20	K	-	-	1k	-
		3.20±0.40	2.50±0.30	M	-	-	0.5k	-

Unit: pieces

Soft Termination Capacitors

www.passivecomponent.com

■ CAPACITANCE RANGE

NPO Dielectric 0805, 1206 Sizes

Dielectric		NPO											
Size		0805					1206						
Rated Voltage		100	200	250	500	630	100	200	250	500	630	1000	2000
capacitance	0.5pF (0R5)	A	A	A	A	A							
	1.0pF (1R0)	A	A	A	A	A							
	1.2pF (1R2)	A	A	A	A	A							
	1.5pF (1R5)	A	A	A	A	A	B	B	B	B	B	B	B
	1.8pF (1R8)	A	A	A	A	A	B	B	B	B	B	B	B
	2.2pF (2R2)	A	A	A	A	A	B	B	B	B	B	B	B
	2.7pF (2R7)	A	A	A	A	A	B	B	B	B	B	B	B
	3.3pF (3R3)	A	A	A	A	A	B	B	B	B	B	B	B
	3.9pF (3R9)	A	A	A	A	A	B	B	B	B	B	B	B
	4.7pF (4R7)	A	A	A	A	A	B	B	B	B	B	B	B
	5.6pF (5R6)	A	A	A	A	A	B	B	B	B	B	B	B
	6.8pF (6R8)	A	A	A	A	A	B	B	B	B	B	B	B
	8.2pF (8R2)	A	A	A	A	A	B	B	B	B	B	B	B
	10pF (100)	A	A	A	A	A	B	B	B	B	B	B	B
	12pF (120)	A	A	A	A	A	B	B	B	B	B	B	B
	15pF (150)	A	A	A	A	A	B	B	B	B	B	B	B
	18pF (180)	A	A	A	A	A	B	B	B	B	B	B	B
	22pF (220)	A	A	A	A	A	B	B	B	B	B	B	B
	27pF (270)	A	A	A	A	A	B	B	B	B	B	B	B
	33pF (330)	A	A	A	A	A	B	B	B	B	B	B	C
	39pF (390)	A	A	A	A	A	B	B	B	B	B	B	C
	47pF (470)	A	A	A	A	A	B	B	B	B	B	C	C
	56pF (560)	A	A	A	A	A	B	B	B	B	B	C	D
	68pF (680)	A	A	A	A	A	B	B	B	B	B	C	D
	82pF (820)	A	A	A	B	B	B	B	B	B	B	D	D
	100pF (101)	A	A	B	B	B	B	B	B	B	B	D	D
	120pF (121)	A	A	B	B	B	B	B	B	B	B	D	G
	150pF (151)	A	B	D	D	D	B	B	B	B	B	D	G
	180pF (181)	A	B	D	D	D	B	B	B	B	B	G	G
	220pF (221)	A	D	D	D	D	B	B	B	B	B	G	G
	270pF (271)	A	D	D	D	D	B	B	C	C	C	G	
	330pF (331)	A	D	D	D	D	B	B	C	C	C	G	
	390pF (391)	B	D	D	D	D	B	B	C	C	C	G	
	470pF (471)	B	D				B	C	C	C	C	G	
560pF (561)	B	D				B	C	D	D	D			
680pF (681)	B	D				B	C	D	D	D			
820pF (821)	B	D				B	C	G	G	G			
1,000pF (102)	B	D				B	C	G	G	G			
1,200pF (122)	B					B	C						
1,500pF (152)	B					B	D						
1,800pF (182)	B					B	D						
2,200pF (222)	B					B	D						
2,700pF (272)	D					B							
3,300pF (332)	D					B							
3,900pF (392)	D					B							
4,700pF (472)						B							
5,600pF (562)						B							
6,800pF (682)						C							
8,200pF (822)						D							

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

■ CAPACITANCE RANGE

NP0 Dielectric 1210, 1808, 1812 Sizes (Continued)

Dielectric		NPO							
Size		1210		1808			1812		
Rated Voltage		1000	2000	1000	2000	3000	1000	2000	3000
capacitance	0.5pF (0R5)								
	1.0pF (1R0)								
	1.2pF (1R2)								
	1.5pF (1R5)								
	1.8pF (1R8)								
	2.2pF (2R2)			D	D	D			
	2.7pF (2R7)			D	D	D			
	3.3pF (3R3)			D	D	D			
	3.9pF (3R9)			D	D	D			
	4.7pF (4R7)			D	D	D			
	5.6pF (5R6)			D	D	D			
	6.8pF (6R8)			D	D	D			
	8.2pF (8R2)			D	D	D			
	10pF (100)	C	C	D	D	D	D	D	D
	12pF (120)	C	C	D	D	D	D	D	D
	15pF (150)	C	C	D	D	D	D	D	D
	18pF (180)	C	C	D	D	D	D	D	D
	22pF (220)	C	C	D	D	D	D	D	D
	27pF (270)	C	C	D	D	D	D	D	D
	33pF (330)	C	C	D	D	D	D	D	D
	39pF (390)	C	C	D	D	D	D	D	D
	47pF (470)	C	C	D	D	D	D	D	D
	56pF (560)	C	D	D	D	D	D	D	D
	68pF (680)	C	D	D	D	D	D	D	D
	82pF (820)	C	D	D	D	D	D	D	D
	100pF (101)	D	D	D	D	K	D	D	D
	120pF (121)	D	D	D	D	K	D	D	D
	150pF (151)	D	G	D	K	K	D	D	D
	180pF (181)	D	G	D	K	K	D	D	K
	220pF (221)	G	G	D	K	K	D	D	K
	270pF (271)	G		K	K	K	D	K	K
	330pF (331)	G		K	K	K	D	K	K
	390pF (391)	G		K	K		D	K	K
	470pF (471)	G		K	K		K	K	K
	560pF (561)			K	K		K	K	
	680pF (681)			K	K		K	K	
	820pF (821)			K			K	K	
	1,000pF (102)			K			K	K	
	1,200pF (122)						K		
	1,500pF (152)						K		
1,800pF (182)									
2,200pF (222)									
2,700pF (272)									
3,300pF (332)									
3,900pF (392)									
4,700pF (472)									
5,600pF (562)									
6,800pF (682)									
8,200pF (822)									

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Soft Termination Capacitors

www.passivecomponent.com

X7R Dielectric 0603, 0805 Sizes, 10V To 250V

Dielectric		X7R											
Size		0603					0805						
Rated Voltage		10	16	25	50	100	10	16	25	50	100	200	250
capacitance	100pF (101)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	120pF (121)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	150pF (151)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	180pF (181)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	220pF (221)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	270pF (271)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	330pF (331)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	390pF (391)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	470pF (471)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	560pF (561)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	680pF (681)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	820pF (821)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	1,000pF (102)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	1,200pF (122)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	1,500pF (152)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	1,800pF (182)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	2,200pF (222)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	2,700pF (272)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	3,300pF (332)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	3,900pF (392)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	4,700pF (472)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	B/D	B/D
	5,600pF (562)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	D	D
	6,800pF (682)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	D	D
	8,200pF (822)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	D	D
	0.010μF (103)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	D	D
	0.012μF (123)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	D	D
	0.015μF (153)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	D	D
	0.018μF (183)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	D	D
	0.022μF (223)	S	S	S	S	S	B/D	B/D	B/D	B/D	B/D	D	D
	0.027μF (273)	S	S	S	S	S	B/D	B/D	B/D	B/D	D		
	0.033μF (333)	S	S	S	X		B/D	B/D	B/D	B/D	D		
	0.039μF (393)	S	S	S	X		B/D	B/D	B/D	B/D	D		
	0.047μF (473)	S	S	S	X		B/D	B/D	B/D	B/D	D		
	0.056μF (563)	S	S	S	X		B/D	B/D	B/D	B/D	D		
	0.068μF (683)	S	S	S	X		B/D	B/D	B/D	B/D	D		
0.082μF (823)	S	S	S	X		B/D	B/D	B/D	B/D	D			
0.10μF (104)	S	S	S	X		B/D	B/D	B/D	B/D	D			
0.12μF (124)	S	S	X			B/D	B/D	B/D	D				
0.15μF (154)	S	S	X			D	D	D	D				
0.18μF (184)	S	S	X			D	D	D	D				
0.22μF (224)	S	S	X			D	D	D	D				
0.27μF (274)	X	X	X										
0.33μF (334)	X	X	X										
0.39μF (394)	X	X	X										
0.47μF (474)	X	X	X										
0.56μF (564)	X												
0.68μF (684)	X	X											
0.82μF (824)	X												
1.00μF (105)	X	X											

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Soft Termination Capacitors

www.passivecomponent.com

X7R Dielectric 1206, 1210, 1812 Sizes, 10V To 250V (Continued)

Dielectric		X7R																				
Size		1206							1210							1812						
Rated Voltage		10	16	25	50	100	200	250	10	16	25	50	100	200	250	10	16	25	50	100	200	250
capacitance	100pF (101)																					
	120pF (121)																					
	150pF (151)	B/D	B/D	B/D	B/D	B/D	D	D														
	180pF (181)	B/D	B/D	B/D	B/D	B/D	D	D														
	220pF (221)	B/D	B/D	B/D	B/D	B/D	D	D														
	270pF (271)	B/D	B/D	B/D	B/D	B/D	D	D														
	330pF (331)	B/D	B/D	B/D	B/D	B/D	D	D														
	390pF (391)	B/D	B/D	B/D	B/D	B/D	D	D														
	470pF (471)	B/D	B/D	B/D	B/D	B/D	D	D														
	560pF (561)	B/D	B/D	B/D	B/D	B/D	D	D														
	680pF (681)	B/D	B/D	B/D	B/D	B/D	D	D														
	820pF (821)	B/D	B/D	B/D	B/D	B/D	D	D														
	1,000pF (102)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	1,200pF (122)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	1,500pF (152)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	1,800pF (182)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	2,200pF (222)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	2,700pF (272)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	3,300pF (332)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	3,900pF (392)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	4,700pF (472)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	5,600pF (562)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	6,800pF (682)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	8,200pF (822)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	0.010μF (103)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	0.012μF (123)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	0.015μF (153)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	0.018μF (183)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	0.022μF (223)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	0.027μF (273)	B/D	B/D	B/D	B/D	B/D	D	D	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	0.033μF (333)	B/D	B/D	B/D	B/D	B/D	G	G	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	0.039μF (393)	B/D	B/D	B/D	B/D	B/D	G	G	C/D	C/D	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D
	0.047μF (473)	B/D	B/D	B/D	B/D	B/D	G	G	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D	D	D
	0.056μF (563)	B/D	B/D	B/D	B/D	B/D	G	G	C/D	C/D	C/D	C/D	C/D	D	D	D	D	D	D	D	D	D
	0.068μF (683)	B/D	B/D	B/D	B/D	B/D	G	G	C/D	C/D	C/D	C/D	C/D	G	G	D	D	D	D	D	D	D
	0.082μF (823)	B/D	B/D	B/D	B/D	D	G	G	C/D	C/D	C/D	C/D	C/D	G	G	D	D	D	D	D	D	D
	0.10μF (104)	B/D	B/D	B/D	B/D	D	G	G	C/D	C/D	C/D	C/D	C/D	G	G	D	D	D	D	D	D	D
	0.12μF (124)	B/D	B/D	B/D	B/D	D			C/D	C/D	C/D	C/D	C/D	G	G	D	D	D	D	D	D	D
	0.15μF (154)	C	C	C	C	G			C/D	C/D	C/D	C/D	D	M	M	D	D	D	D	D	K	K
	0.18μF (184)	C	C	C	C	G			C/D	C/D	C/D	C/D	D	M	M	D	D	D	D	D	K	K
0.22μF (224)	C	C	C	C	G			C/D	C/D	C/D	C/D	D	M	M	D	D	D	D	D	K	K	
0.27μF (274)	C	C	C	D				C/D	C/D	C/D	C/D	G	M	M	D	D	D	D	D	K	K	
0.33μF (334)	C	C	C	D				C/D	C/D	C/D	D	G	M	M	D	D	D	D	D	K	K	
0.39μF (394)	C	C	J	P				C/D	C/D	C/D	D	M	M	M	D	D	D	D	D	K	K	
0.47μF (474)	J	J	J	P				C/D	C/D	C/D	D	M	M	M	D	D	D	D	K	K	K	
0.56μF (564)	J	J	J	P				D	D	D	D	M			D	D	D	D	K			
0.68μF (684)	J	J	J	P				D	D	D	D	K			D	D	D	K	K			
0.82μF (824)	J	J	J	P				D	D	D	D	K			D	D	D	K	K			
1.0μF (105)	J	J	J	P				D	D	D	D	K			D	D	D	K	K			
1.5μF (155)																				K		
2.2μF (225)																				M		

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Soft Termination Capacitors

www.passivecomponent.com

X7R Dielectric 0805, 1206 Sizes, 500V To 2000V (Continued)

Dielectric		X7R				
Size		0805		1206		
Rated Voltage		500	500	630	1000	2000
capacitance	100pF (101)	B	G	G	G	G
	120pF (121)	B	G	G	G	G
	150pF (151)	B	G	G	G	G
	180pF (181)	B	G	G	G	G
	220pF (221)	B	D	D	D	D
	270pF (271)	B	D	D	D	D
	330pF (331)	B	D	D	D	D
	390pF (391)	B	D	D	D	D
	470pF (471)	B	D	D	D	D
	560pF (561)	B	D	D	D	D
	680pF (681)	B	D	D	D	D
	820pF (821)	B	D	D	D	D
	1,000pF (102)	B	D	D	D	D
	1,200pF (122)	B	D	D	D	
	1,500pF (152)	B	D	D	D	
	1,800pF (182)	B	D	D	D	
	2,200pF (222)	B	D	D	D	
	2,700pF (272)	B	D	D	D	
	3,300pF (332)	B	D	D	D	
	3,900pF (392)	B	D	D	D	
	4,700pF (472)	D	D	D	D	
	5,600pF (562)	D	D	D	D	
	6,800pF (682)	D	D	D	D	
	8,200pF (822)	D	D	D	D	
	0.010μF (103)	D	D	D	D	
	0.012μF (123)		D	D		
	0.015μF (153)		D	D		
	0.018μF (183)		D	D		
	0.022μF (223)		G	G		
	0.027μF (273)		G	G		
	0.033μF (333)		G	G		

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Appendix I : Reliability Test Conditions and Requirements

www.passivecomponent.com

NO.	Item	Test Condition	Requirements																																																																										
1.	Visual and Mechanical	---	* No remarkable defect. * Dimensions to confirm to individual specification sheet.																																																																										
2.	Capacitance	Class I : NP0 Cap≤1000pF 1.0±0.2Vrms, 1MHz±10% Cap>1000pF 1.0±0.2Vrms, 1KHz±10%	* Shall not exceed the limits given in the detailed spec.																																																																										
3.	Q/ D.F. (Dissipation Factor)	Class II : X7R, X7E, X6S, X5R, Y5V Cap≤10μF, 1.0±0.2Vrms, 1KHz±10% Cap>10μF, 0.5±0.2Vrms, 120Hz±20%	<p>NP0: Cap≥30pF, Q≥1000; Cap<30pF, Q≥400+20C, RF series: Q>2500 X7R / X6S / X5R:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤2.5%</td> <td>≤3%</td> <td>0201(50V);0603≥0.047μF;0805≥0.18μF;1206≥0.47μF</td> </tr> <tr> <td>35V</td> <td>≤3.5%</td> <td></td> <td></td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤3.5%</td> <td>≤5%</td> <td>0805≥1μF, 1210≥10μF</td> </tr> <tr> <td>≤7%</td> <td>0603≥0.33μF; TT series & Cap≥1μF; 1206≥4.7μF</td> </tr> <tr> <td>≤10%</td> <td>0603≥0.47μF, 0805≥2.2μF; 1206≥6.8μF; 0402≥0.10μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤3.5%</td> <td>≤5%</td> <td>0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td>≤10%</td> <td>0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series & Cap≥1μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤5.0%</td> <td>≤10%</td> <td>TT series & Cap≥1μF; 0603≥0.33μF; 0402≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.1μF; 0402≥1μF</td> </tr> <tr> <td rowspan="2">6.3V</td> <td rowspan="2">≤10%</td> <td>≤15%</td> <td>0603≥10μF; 0805≥4.7μF; 1210≥100μF; TT series & Cap≥1μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥2.2μF</td> </tr> </tbody> </table> <p>X7R / X7E, LD series; 100V: DF ≤ 1.4%; ≥200V: DF ≤ 1.0%</p> <p>Y5V</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤5%</td> <td>≤7%</td> <td>0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF; TT series & Cap≥1μF</td> </tr> <tr> <td>35V</td> <td>≤7%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤5%</td> <td>≤7%</td> <td>0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF</td> </tr> <tr> <td>≤9%</td> <td>0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF; TT series & Cap≥1μF</td> </tr> <tr> <td>16V(C<1μF)</td> <td>≤7%</td> <td>≤9%</td> <td>0402≥0.068μF; 0603≥0.68μF</td> </tr> <tr> <td rowspan="2">16V(C≥1μF)</td> <td rowspan="2">≤9%</td> <td>≤12.5%</td> <td>0402≥0.22μF</td> </tr> <tr> <td>≤12.5%</td> <td>0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF; TT series & Cap≥1μF</td> </tr> <tr> <td>10V</td> <td>≤12.5%</td> <td>≤20%</td> <td>0402≥0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤20%</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Rated vol.	D.F.≤	Exception D.F.≤		≥50V	≤2.5%	≤3%	0201(50V);0603≥0.047μF;0805≥0.18μF;1206≥0.47μF	35V	≤3.5%			25V	≤3.5%	≤5%	0805≥1μF, 1210≥10μF	≤7%	0603≥0.33μF; TT series & Cap≥1μF; 1206≥4.7μF	≤10%	0603≥0.47μF, 0805≥2.2μF; 1206≥6.8μF; 0402≥0.10μF	16V	≤3.5%	≤5%	0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF	≤10%	0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series & Cap≥1μF	10V	≤5.0%	≤10%	TT series & Cap≥1μF; 0603≥0.33μF; 0402≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF	≤15%	0201≥0.1μF; 0402≥1μF	6.3V	≤10%	≤15%	0603≥10μF; 0805≥4.7μF; 1210≥100μF; TT series & Cap≥1μF	≤20%	0402≥2.2μF	Rated vol.	D.F.≤	Exception D.F.≤		≥50V	≤5%	≤7%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF; TT series & Cap≥1μF	35V	≤7%	---	---	25V	≤5%	≤7%	0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF	≤9%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF; TT series & Cap≥1μF	16V(C<1μF)	≤7%	≤9%	0402≥0.068μF; 0603≥0.68μF	16V(C≥1μF)	≤9%	≤12.5%	0402≥0.22μF	≤12.5%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF; TT series & Cap≥1μF	10V	≤12.5%	≤20%	0402≥0.47μF	6.3V	≤20%	---	---
Rated vol.	D.F.≤	Exception D.F.≤																																																																											
≥50V	≤2.5%	≤3%	0201(50V);0603≥0.047μF;0805≥0.18μF;1206≥0.47μF																																																																										
35V	≤3.5%																																																																												
25V	≤3.5%	≤5%	0805≥1μF, 1210≥10μF																																																																										
		≤7%	0603≥0.33μF; TT series & Cap≥1μF; 1206≥4.7μF																																																																										
		≤10%	0603≥0.47μF, 0805≥2.2μF; 1206≥6.8μF; 0402≥0.10μF																																																																										
16V	≤3.5%	≤5%	0402≥0.033μF; 0603≥0.15μF; 0805≥0.68μF; 1206≥2.2μF; 1210≥4.7μF																																																																										
		≤10%	0603≥0.68μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥22μF; TT series & Cap≥1μF																																																																										
10V	≤5.0%	≤10%	TT series & Cap≥1μF; 0603≥0.33μF; 0402≥0.33μF; 0805≥2.2μF; 1206≥2.2μF; 1210≥22μF																																																																										
		≤15%	0201≥0.1μF; 0402≥1μF																																																																										
6.3V	≤10%	≤15%	0603≥10μF; 0805≥4.7μF; 1210≥100μF; TT series & Cap≥1μF																																																																										
		≤20%	0402≥2.2μF																																																																										
Rated vol.	D.F.≤	Exception D.F.≤																																																																											
≥50V	≤5%	≤7%	0603≥0.1μF; 0805≥0.47μF; 1206≥4.7μF; TT series & Cap≥1μF																																																																										
35V	≤7%	---	---																																																																										
25V	≤5%	≤7%	0402≥0.047μF; 0603≥0.1μF; 0805≥0.33μF; 1206≥1μF; 1210≥4.7μF																																																																										
		≤9%	0402≥0.068μF; 0603≥0.47μF; 1206≥4.7μF; 1210≥22μF; TT series & Cap≥1μF																																																																										
16V(C<1μF)	≤7%	≤9%	0402≥0.068μF; 0603≥0.68μF																																																																										
16V(C≥1μF)	≤9%	≤12.5%	0402≥0.22μF																																																																										
		≤12.5%	0603≥2.2μF; 0805≥3.3μF; 1206≥10μF; 1210≥22μF; 1812≥47μF; TT series & Cap≥1μF																																																																										
10V	≤12.5%	≤20%	0402≥0.47μF																																																																										
6.3V	≤20%	---	---																																																																										
4a.	Dielectric Strength	<p>* To apply voltage (≤100V) 250%.</p> <p>* Duration : 1 to 5 sec.</p> <p>* Charge & discharge current less than 50mA.</p> <p>* To apply voltage : 200V ~ 300V&LD series ≥2 times V DC 500V ~ 999V ≥1.5 times V DC 1000V ~ 3000V ≥1.2 times V DC</p> <p>* Cut-off, set at 10mA</p> <p>* TEST= 15 sec. * RAMP=0</p>	* No evidence of damage or flash over during test.																																																																										
4b.	Dielectric Strength (for X1/Y2 & X2/Y3)	<p>* To apply 1500 VAC voltage.</p> <p>* Duration: 60 sec.</p>	* No evidence of damage or flash over during test.																																																																										
5.	Insulation Resistance	To apply rated voltage for max. 120 sec.	<p>10GΩ or RxC≥500Ω·F whichever is smaller.</p> <p>Class II (X7R , X7E , X6S , X5R , Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V:X7R</td> <td rowspan="4">RxC≥100 Ω·F</td> </tr> <tr> <td>16V:0402≥0.22μF</td> </tr> <tr> <td>10V:0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td> </tr> <tr> <td>6.3V</td> </tr> </tbody> </table>	Rated voltage	Insulation Resistance	100V:X7R	RxC≥100 Ω·F	16V:0402≥0.22μF	10V:0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V																																																																			
Rated voltage	Insulation Resistance																																																																												
100V:X7R	RxC≥100 Ω·F																																																																												
16V:0402≥0.22μF																																																																													
10V:0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																																													
6.3V																																																																													
	Rated voltage: 200 ~ 630V	To apply rated voltage (500V max) for 60 sec	≥10GΩ or 100Ω·F whichever is smaller.																																																																										
	Rated voltage: > 630V	To apply 500V for 60 sec	≥10GΩ																																																																										
6.	Temperature Coefficient	<p>With no electrical load.</p> <table border="1"> <thead> <tr> <th>T.C.</th> <th>Operating Temp</th> </tr> </thead> <tbody> <tr> <td>NPO (C0G)</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>NPO (C0J)</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>X7R</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>X7E</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>X6S</td> <td>-55~105°C at 25°C</td> </tr> <tr> <td>X5R</td> <td>-55~85°C at 25°C</td> </tr> <tr> <td>Y5V</td> <td>-25~85°C at 20°C</td> </tr> </tbody> </table>	T.C.	Operating Temp	NPO (C0G)	-55~125°C at 25°C	NPO (C0J)	-55~125°C at 25°C	X7R	-55~125°C at 25°C	X7E	-55~125°C at 25°C	X6S	-55~105°C at 25°C	X5R	-55~85°C at 25°C	Y5V	-25~85°C at 20°C	<table border="1"> <thead> <tr> <th>T.C.</th> <th>Capacitance Change</th> </tr> </thead> <tbody> <tr> <td>NPO (C0G)</td> <td>Within ±30ppm / °C</td> </tr> <tr> <td>NPO (C0J)</td> <td>Within ±120ppm / °C</td> </tr> <tr> <td>X7R</td> <td>Within ±15%</td> </tr> <tr> <td>X7E</td> <td>Within ±4.7%</td> </tr> <tr> <td>X6S</td> <td>Within ±22%</td> </tr> <tr> <td>X5R</td> <td>Within ±15%</td> </tr> <tr> <td>Y5V</td> <td>Within +30%/-80%</td> </tr> </tbody> </table>	T.C.	Capacitance Change	NPO (C0G)	Within ±30ppm / °C	NPO (C0J)	Within ±120ppm / °C	X7R	Within ±15%	X7E	Within ±4.7%	X6S	Within ±22%	X5R	Within ±15%	Y5V	Within +30%/-80%																																										
T.C.	Operating Temp																																																																												
NPO (C0G)	-55~125°C at 25°C																																																																												
NPO (C0J)	-55~125°C at 25°C																																																																												
X7R	-55~125°C at 25°C																																																																												
X7E	-55~125°C at 25°C																																																																												
X6S	-55~105°C at 25°C																																																																												
X5R	-55~85°C at 25°C																																																																												
Y5V	-25~85°C at 20°C																																																																												
T.C.	Capacitance Change																																																																												
NPO (C0G)	Within ±30ppm / °C																																																																												
NPO (C0J)	Within ±120ppm / °C																																																																												
X7R	Within ±15%																																																																												
X7E	Within ±4.7%																																																																												
X6S	Within ±22%																																																																												
X5R	Within ±15%																																																																												
Y5V	Within +30%/-80%																																																																												
7.	Adhesive Strength of Termination	<p>* Pressurizing force: 0201: 2N 0402 & 0603: 5N >0603: 10N</p> <p>* Test time: 10±1 sec.</p>	* No remarkable damage or removal of the terminations.																																																																										

Appendix I : Reliability Test Conditions and Requirements

www.passivecomponent.com

NO.	Item	Test Condition	Requirements																																																																															
8.	Vibration Resistance	<ul style="list-style-type: none"> * Vibration frequency: 10~55 Hz/min. * Total amplitude: 1.5mm * Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.) 	<ul style="list-style-type: none"> * No remarkable damage. * Cap change and Q/D.F.: To meet initial spec. 																																																																															
9.	Solderability	<ul style="list-style-type: none"> * Solder temperature: 235±5 °C * Dipping time: 2±0.5 sec. 	95% min. coverage of all metalized area.																																																																															
10.	Bending Test	<ul style="list-style-type: none"> * The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm /SH series:5mm** & 3mm*** and then the pressure shall be maintained for 5±1 sec. * Measurement to be made after keeping at room temp. for 24±2 hrs. for 24±2 hrs (Class I) or 48±4 hrs (Class II). (**Thickness >1.0mm ; ***Thickness ≤1.0mm) 	<ul style="list-style-type: none"> * No remarkable damage. * Cap change: NP0: within ±5.0% or ±0.5pF whichever is larger. X7R / X7E / X6S / X5R: within ±12.5% Y5V: within ±30% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.) 																																																																															
11.	Resistance to Soldering Heat	<ul style="list-style-type: none"> * Solder temperature: 270±5°C * Dipping time: 10±1 sec * Preheating: 120 to 150°C for 1 minute before immerse the capacitor in an eutectic solder. * Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 48±4 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II). 	<ul style="list-style-type: none"> * No remarkable damage. * Cap change: NP0: within ±2.5% or ±0.25pF whichever is larger. X7R / X7E / X6S / X5R: within ±7.5% Y5V: within ±20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements. * 25% max. leaching on each edge. 																																																																															
12.	Temperature Cycle	<ul style="list-style-type: none"> * Conduct the five cycles according to the temperatures and time. <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Step</th> <th>Temp.(°C)</th> <th>Time.(min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. operating temp. +0/-3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room temp.</td> <td>2~3</td> </tr> <tr> <td>3</td> <td>Max. operating temp. +3/-0</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room temp.</td> <td>2~3</td> </tr> </tbody> </table> * Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 48±4 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II). 	Step	Temp.(°C)	Time.(min.)	1	Min. operating temp. +0/-3	30±3	2	Room temp.	2~3	3	Max. operating temp. +3/-0	30±3	4	Room temp.	2~3	<ul style="list-style-type: none"> * No remarkable damage. * Cap change: NP0: within ±2.5% or ±0.25pF whichever is larger. X7R / X7E / X6S / X5R: within ±7.5% Y5V: within ±20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements. 																																																																
Step	Temp.(°C)	Time.(min.)																																																																																
1	Min. operating temp. +0/-3	30±3																																																																																
2	Room temp.	2~3																																																																																
3	Max. operating temp. +3/-0	30±3																																																																																
4	Room temp.	2~3																																																																																
13.	Humidity (Steady State)	<ul style="list-style-type: none"> * Test temp.: 40±2°C * Humidity: 90~95% RH * Test time: 500+24/-0hrs. * Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II). 	<ul style="list-style-type: none"> * No remarkable damage. * Cap change: NP0: within ±5.0% or ±0.5pF whichever is larger. X7R / X7E / X6S / X5R: ≥10V, within ±12.5%, 6.3V, within ±25% TT series & Cap≥1μF, within ±25% Y5V: ≥10V, within ±30%, 6.3V, within +30/-40% * Q/D.F. value: NP0: More than 30pF Q≥350, 10pF≤C<30pF, Q≥275+2.5C Less than 10pF Q≥200+10C X7R / X6S / X5R: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤3%</td> <td>≤6%</td> <td>0201(50V);0603≥0.047μF;0805≥0.18μF;1206≥0.47μF</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td></td> <td></td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤5%</td> <td>≤10%</td> <td>0805≥1μF;1210≥10μF</td> </tr> <tr> <td>≤14%</td> <td>0603≥0.33μF;1206≥4.7μF;TT series & Cap≥1μF</td> </tr> <tr> <td>≤15%</td> <td>1206≥6.8μF;0402≥0.1μF;0603≥0.47μF;0805≥2.2μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0603≥0.15μF;0805≥0.68μF;1206≥2.2μF;1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>TT series & Cap≥1μF;0603≥0.68μF;0805≥2.2μF;1210≥22μF;0402≥0.033μF;1206≥4.7μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤7.5%</td> <td>≤15%</td> <td>0603≥0.33μF;0805≥2.2μF;1206≥2.2μF;1210≥22μF</td> </tr> <tr> <td>≤20%</td> <td>0201≥0.1μF;0402≥1μF;TT series & Cap≥1μF</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30%</td> <td>0402≥2.2μF;0603≥10μF; 0805≥4.7μF;1210≥100μF; TT series & Cap≥1μF</td> </tr> </tbody> </table> X7R / X7E,LD series:DF≤3.0% Y5V: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤7.5%</td> <td>≤10%</td> <td>0603≥0.1μF;0805≥0.47μF;1206≥4.7μF; TT series & Cap≥1μF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤7.5%</td> <td>≤10%</td> <td>0402≥0.047μF;0603≥0.1μF;0805≥0.33μF;1206≥1μF;1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0402≥0.068μF;0603≥0.47μF;1206≥4.7μF1210≥22μF;TT series & Cap≥1μF</td> </tr> <tr> <td rowspan="2">16V(C<1.0μF)</td> <td rowspan="2">≤10%</td> <td>≤12.5%</td> <td>0402≥0.068μF;0603≥0.68μF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.22μF</td> </tr> <tr> <td>16V(C≥1.0μF)</td> <td>≤12.5%</td> <td>≤20%</td> <td>0603≥2.2μF;0805≥3.3μF;1206≥10μF;1210≥22μF;1812≥47μF;TT series & Cap≥1μF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30%</td> <td>0402≥0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> * I.R.: ≥10V 1GΩ or 50Ω-F whichever is smaller. Class II (X7R , X7E , X6S , X5R , Y5V) <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V:X7R</td> <td rowspan="4">RxC≥10 Ω-F</td> </tr> <tr> <td>16V:0402≥0.22μF</td> </tr> <tr> <td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;1206≥4.7μF;1210≥47μF</td> </tr> <tr> <td>6.3V</td> </tr> </tbody> </table> 	Rated vol.	D.F.≤	Exception D.F.≤		≥50V	≤3%	≤6%	0201(50V);0603≥0.047μF;0805≥0.18μF;1206≥0.47μF	35V	≤5%			25V	≤5%	≤10%	0805≥1μF;1210≥10μF	≤14%	0603≥0.33μF;1206≥4.7μF;TT series & Cap≥1μF	≤15%	1206≥6.8μF;0402≥0.1μF;0603≥0.47μF;0805≥2.2μF	16V	≤5%	≤10%	0603≥0.15μF;0805≥0.68μF;1206≥2.2μF;1210≥4.7μF	≤15%	TT series & Cap≥1μF;0603≥0.68μF;0805≥2.2μF;1210≥22μF;0402≥0.033μF;1206≥4.7μF	10V	≤7.5%	≤15%	0603≥0.33μF;0805≥2.2μF;1206≥2.2μF;1210≥22μF	≤20%	0201≥0.1μF;0402≥1μF;TT series & Cap≥1μF	6.3V	≤15%	≤30%	0402≥2.2μF;0603≥10μF; 0805≥4.7μF;1210≥100μF; TT series & Cap≥1μF	Rated vol.	D.F.≤	Exception D.F.≤		≥50V	≤7.5%	≤10%	0603≥0.1μF;0805≥0.47μF;1206≥4.7μF; TT series & Cap≥1μF	35V	≤10%	---	---	25V	≤7.5%	≤10%	0402≥0.047μF;0603≥0.1μF;0805≥0.33μF;1206≥1μF;1210≥4.7μF	≤15%	0402≥0.068μF;0603≥0.47μF;1206≥4.7μF1210≥22μF;TT series & Cap≥1μF	16V(C<1.0μF)	≤10%	≤12.5%	0402≥0.068μF;0603≥0.68μF	≤20%	0402≥0.22μF	16V(C≥1.0μF)	≤12.5%	≤20%	0603≥2.2μF;0805≥3.3μF;1206≥10μF;1210≥22μF;1812≥47μF;TT series & Cap≥1μF	10V	≤20%	≤30%	0402≥0.47μF	6.3V	≤30%	---	---	Rated voltage	Insulation Resistance	100V:X7R	RxC≥10 Ω-F	16V:0402≥0.22μF	10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;1206≥4.7μF;1210≥47μF	6.3V
Rated vol.	D.F.≤	Exception D.F.≤																																																																																
≥50V	≤3%	≤6%	0201(50V);0603≥0.047μF;0805≥0.18μF;1206≥0.47μF																																																																															
35V	≤5%																																																																																	
25V	≤5%	≤10%	0805≥1μF;1210≥10μF																																																																															
		≤14%	0603≥0.33μF;1206≥4.7μF;TT series & Cap≥1μF																																																																															
		≤15%	1206≥6.8μF;0402≥0.1μF;0603≥0.47μF;0805≥2.2μF																																																																															
16V	≤5%	≤10%	0603≥0.15μF;0805≥0.68μF;1206≥2.2μF;1210≥4.7μF																																																																															
		≤15%	TT series & Cap≥1μF;0603≥0.68μF;0805≥2.2μF;1210≥22μF;0402≥0.033μF;1206≥4.7μF																																																																															
10V	≤7.5%	≤15%	0603≥0.33μF;0805≥2.2μF;1206≥2.2μF;1210≥22μF																																																																															
		≤20%	0201≥0.1μF;0402≥1μF;TT series & Cap≥1μF																																																																															
6.3V	≤15%	≤30%	0402≥2.2μF;0603≥10μF; 0805≥4.7μF;1210≥100μF; TT series & Cap≥1μF																																																																															
Rated vol.	D.F.≤	Exception D.F.≤																																																																																
≥50V	≤7.5%	≤10%	0603≥0.1μF;0805≥0.47μF;1206≥4.7μF; TT series & Cap≥1μF																																																																															
35V	≤10%	---	---																																																																															
25V	≤7.5%	≤10%	0402≥0.047μF;0603≥0.1μF;0805≥0.33μF;1206≥1μF;1210≥4.7μF																																																																															
		≤15%	0402≥0.068μF;0603≥0.47μF;1206≥4.7μF1210≥22μF;TT series & Cap≥1μF																																																																															
16V(C<1.0μF)	≤10%	≤12.5%	0402≥0.068μF;0603≥0.68μF																																																																															
		≤20%	0402≥0.22μF																																																																															
16V(C≥1.0μF)	≤12.5%	≤20%	0603≥2.2μF;0805≥3.3μF;1206≥10μF;1210≥22μF;1812≥47μF;TT series & Cap≥1μF																																																																															
10V	≤20%	≤30%	0402≥0.47μF																																																																															
6.3V	≤30%	---	---																																																																															
Rated voltage	Insulation Resistance																																																																																	
100V:X7R	RxC≥10 Ω-F																																																																																	
16V:0402≥0.22μF																																																																																		
10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;1206≥4.7μF;1210≥47μF																																																																																		
6.3V																																																																																		

Appendix I : Reliability Test Conditions and Requirements

www.passivecomponent.com

NO.	Item	Test Condition	Requirements																																																																																																																						
14.	Humidity Load (Damp Heat)	<p>* Test temp.: 40±2°C</p> <p>* Humidity: 90~95%RH</p> <p>* Test time: 500+24/-0 hrs.</p> <p>* To apply voltage: rated voltage (Max. 500V)</p> <p>* Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II).</p>	<p>* No remarkable damage.</p> <p>* Cap change: NPO: within ±7.5% or ±0.75pF whichever is larger. X7R / X7E / X6S / X5R: ≥10V, within ±12.5%, 6.3V, within ±25%, TT series & Cap≥1μF, within ±25% Y5V: ≥10V, within ±30%, 6.3V, within +30 / -40%</p> <p>* Q/D.F. value: NPO: C≥30pF, Q≥200; C<30pF, Q≥100+10/3C X7R / X6S / X5R:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤3%</td> <td>≤6%</td> <td>0201(50V), 0603≥0.047μF;0805≥0.18μF; 1206≥0.47μF</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td></td> <td></td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤5%</td> <td>≤10%</td> <td>0805≥1μF; 1210≥10μF</td> </tr> <tr> <td>≤14%</td> <td>0603≥0.33μF;1206≥4.7μF;TT series & Cap≥1μF</td> </tr> <tr> <td>≤15%</td> <td>1206≥6.8μF;0402≥0.1μF;0603≥0.47μF;0805≥2.2μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0603≥0.15μF;0805≥0.68μF;1206≥2.2μF;1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>TT series & Cap≥1μF;0603≥0.68μF;0805≥2.2μF;1210≥22μF;0402≥0.033μF;1206≥4.7μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤7.5%</td> <td>≤15%</td> <td>0603≥0.33μF;0805≥2.2μF;1206≥2.2μF;1210≥22μF;0402≥0.33μF</td> </tr> <tr> <td>≤20%</td> <td>0201≥0.1μF;0402≥1μF;TT series & Cap≥1μF</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30%</td> <td>0603≥10μF;1210≥100μF;0402≥2.2μF;TT series & Cap≥1μF;0805≥4.7μF</td> </tr> </tbody> </table> <p>X7R / X7E,LD series:DF≤3.0%</p> <p>Y5V:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤7.5%</td> <td>≤10%</td> <td>0603≥0.1μF;0805≥0.47μF;1206≥4.7μF;TT series & Cap≥1μF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤7.5%</td> <td>≤10%</td> <td>0402≥0.047μF;0603≥0.1μF;0805≥0.33μF;1206≥1μF;1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0402≥0.068μF;0603≥0.47μF;1206≥4.7μF;1210≥22μF;TT series & Cap≥1μF</td> </tr> <tr> <td>16V(C<1.0μF)</td> <td>≤10%</td> <td>≤12.5%</td> <td>0402≥0.068μF;0603≥0.68μF</td> </tr> <tr> <td></td> <td></td> <td>≤20%</td> <td>0402≥0.22μF</td> </tr> <tr> <td>16V(C≥1.0μF)</td> <td>≤12.5%</td> <td>≤20%</td> <td>1206≥10μF;1210≥22μF;1812≥47μF;TT series & Cap≥1μF;0603≥2.2μF;0805≥3.3μF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30%</td> <td>0402≥0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p>* I.R.: ≥10V, 500MΩ or 25Ω-F whichever is smaller.</p> <p>Class II (X7R , X7E , X6S , X5R , Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V:X7R</td> <td rowspan="4">RxC≥5 Ω-F</td> </tr> <tr> <td>16V:0402≥0.22μF</td> </tr> <tr> <td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;1206≥4.7μF;1210≥47μF</td> </tr> <tr> <td>6.3V</td> </tr> </tbody> </table>	Rated vol.	D.F.≤	Exception D.F.≤		≥50V	≤3%	≤6%	0201(50V), 0603≥0.047μF;0805≥0.18μF; 1206≥0.47μF	35V	≤5%			25V	≤5%	≤10%	0805≥1μF; 1210≥10μF	≤14%	0603≥0.33μF;1206≥4.7μF;TT series & Cap≥1μF	≤15%	1206≥6.8μF;0402≥0.1μF;0603≥0.47μF;0805≥2.2μF	16V	≤5%	≤10%	0603≥0.15μF;0805≥0.68μF;1206≥2.2μF;1210≥4.7μF	≤15%	TT series & Cap≥1μF;0603≥0.68μF;0805≥2.2μF;1210≥22μF;0402≥0.033μF;1206≥4.7μF	10V	≤7.5%	≤15%	0603≥0.33μF;0805≥2.2μF;1206≥2.2μF;1210≥22μF;0402≥0.33μF	≤20%	0201≥0.1μF;0402≥1μF;TT series & Cap≥1μF	6.3V	≤15%	≤30%	0603≥10μF;1210≥100μF;0402≥2.2μF;TT series & Cap≥1μF;0805≥4.7μF	Rated vol.	D.F.≤	Exception D.F.≤		≥50V	≤7.5%	≤10%	0603≥0.1μF;0805≥0.47μF;1206≥4.7μF;TT series & Cap≥1μF	35V	≤10%	---	---	25V	≤7.5%	≤10%	0402≥0.047μF;0603≥0.1μF;0805≥0.33μF;1206≥1μF;1210≥4.7μF	≤15%	0402≥0.068μF;0603≥0.47μF;1206≥4.7μF;1210≥22μF;TT series & Cap≥1μF	16V(C<1.0μF)	≤10%	≤12.5%	0402≥0.068μF;0603≥0.68μF			≤20%	0402≥0.22μF	16V(C≥1.0μF)	≤12.5%	≤20%	1206≥10μF;1210≥22μF;1812≥47μF;TT series & Cap≥1μF;0603≥2.2μF;0805≥3.3μF	10V	≤20%	≤30%	0402≥0.47μF	6.3V	≤30%	---	---	Rated voltage	Insulation Resistance	100V:X7R	RxC≥5 Ω-F	16V:0402≥0.22μF	10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;1206≥4.7μF;1210≥47μF	6.3V																																					
			Rated vol.	D.F.≤	Exception D.F.≤																																																																																																																				
			≥50V	≤3%	≤6%	0201(50V), 0603≥0.047μF;0805≥0.18μF; 1206≥0.47μF																																																																																																																			
			35V	≤5%																																																																																																																					
25V	≤5%	≤10%	0805≥1μF; 1210≥10μF																																																																																																																						
		≤14%	0603≥0.33μF;1206≥4.7μF;TT series & Cap≥1μF																																																																																																																						
		≤15%	1206≥6.8μF;0402≥0.1μF;0603≥0.47μF;0805≥2.2μF																																																																																																																						
16V	≤5%	≤10%	0603≥0.15μF;0805≥0.68μF;1206≥2.2μF;1210≥4.7μF																																																																																																																						
		≤15%	TT series & Cap≥1μF;0603≥0.68μF;0805≥2.2μF;1210≥22μF;0402≥0.033μF;1206≥4.7μF																																																																																																																						
10V	≤7.5%	≤15%	0603≥0.33μF;0805≥2.2μF;1206≥2.2μF;1210≥22μF;0402≥0.33μF																																																																																																																						
		≤20%	0201≥0.1μF;0402≥1μF;TT series & Cap≥1μF																																																																																																																						
6.3V	≤15%	≤30%	0603≥10μF;1210≥100μF;0402≥2.2μF;TT series & Cap≥1μF;0805≥4.7μF																																																																																																																						
Rated vol.	D.F.≤	Exception D.F.≤																																																																																																																							
≥50V	≤7.5%	≤10%	0603≥0.1μF;0805≥0.47μF;1206≥4.7μF;TT series & Cap≥1μF																																																																																																																						
35V	≤10%	---	---																																																																																																																						
25V	≤7.5%	≤10%	0402≥0.047μF;0603≥0.1μF;0805≥0.33μF;1206≥1μF;1210≥4.7μF																																																																																																																						
		≤15%	0402≥0.068μF;0603≥0.47μF;1206≥4.7μF;1210≥22μF;TT series & Cap≥1μF																																																																																																																						
16V(C<1.0μF)	≤10%	≤12.5%	0402≥0.068μF;0603≥0.68μF																																																																																																																						
		≤20%	0402≥0.22μF																																																																																																																						
16V(C≥1.0μF)	≤12.5%	≤20%	1206≥10μF;1210≥22μF;1812≥47μF;TT series & Cap≥1μF;0603≥2.2μF;0805≥3.3μF																																																																																																																						
10V	≤20%	≤30%	0402≥0.47μF																																																																																																																						
6.3V	≤30%	---	---																																																																																																																						
Rated voltage	Insulation Resistance																																																																																																																								
100V:X7R	RxC≥5 Ω-F																																																																																																																								
16V:0402≥0.22μF																																																																																																																									
10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;1206≥4.7μF;1210≥47μF																																																																																																																									
6.3V																																																																																																																									
15.	High Temperature Load (Endurance)	<p>* Test temp.: NPO, X7R/X7E: 125±3°C X6S: 105±3°C X5R, Y5V: 85±3°C</p> <p>* To apply voltage: (1.1) 100% of rated voltage for below range.</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Dielectnc</th> <th>Rated Voltage</th> <th>Capacitance range</th> </tr> </thead> <tbody> <tr> <td>0201</td> <td>X5R</td> <td>6.3V 10V</td> <td>C ≥ 0.1μF</td> </tr> <tr> <td>0402</td> <td>X5R,Y5V</td> <td>6.3V 10V</td> <td>C ≥ 1.0μF</td> </tr> <tr> <td>0603</td> <td>X5R</td> <td>6.3V 10V</td> <td>C ≥ 4.7μF</td> </tr> <tr> <td>0805</td> <td>X5R</td> <td>6.3V</td> <td>C ≥ 22μF</td> </tr> </tbody> </table> <p>(1.2) 6.3V or C≥10μF 150% of rated voltage.</p> <p>(2.1) 10V≤Ur<500V 200% of rated voltage.</p> <p>(2.2) 150% of rated voltage for below range.</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Dielectnc</th> <th>Rated Voltage</th> <th>Capacitance range</th> </tr> </thead> <tbody> <tr> <td>0603</td> <td>X5R</td> <td>10V 16V</td> <td>C ≥ 1.0μF</td> </tr> <tr> <td rowspan="2">0805</td> <td rowspan="2">X5R</td> <td rowspan="2">10V</td> <td>C ≥ 4.7μF</td> </tr> <tr> <td>C ≥ 2.2μF & T=0.85±0.1mm</td> </tr> <tr> <td>1206</td> <td>X5R</td> <td>10V</td> <td>C ≥ 4.7μF & T=0.85±0.1mm</td> </tr> </tbody> </table> <p>(3) 500V: 150% of rated voltage.</p> <p>(4) Ur≥630V: 120% of rated voltage.</p> <p>* Test time: 1000+24/-0 hrs.</p> <p>* Measurement to be made after keeping at room temp. for 24±2 hrs. (Class I) or 48±4 hrs. (Class II).</p>	Size	Dielectnc	Rated Voltage	Capacitance range	0201	X5R	6.3V 10V	C ≥ 0.1μF	0402	X5R,Y5V	6.3V 10V	C ≥ 1.0μF	0603	X5R	6.3V 10V	C ≥ 4.7μF	0805	X5R	6.3V	C ≥ 22μF	Size	Dielectnc	Rated Voltage	Capacitance range	0603	X5R	10V 16V	C ≥ 1.0μF	0805	X5R	10V	C ≥ 4.7μF	C ≥ 2.2μF & T=0.85±0.1mm	1206	X5R	10V	C ≥ 4.7μF & T=0.85±0.1mm	<p>* No remarkable damage.</p> <p>* Cap change: NPO: within ±3.0% or ±0.3pF whichever is larger. X7R / X7E / X6S / X5R: ≥10V, within ±12.5%, 6.3V, within ±25%, TT series & Cap≥1μF, within ±25% Y5V: ≥10V, within ±30% / 6.3V, within +30 to -40%</p> <p>* Q/D.F. value: NPO: Cap≥30pF, Q≥350, 10pF≤Cap<30pF, Q≥275+2.5C, Cap<10pF, Q≥200+10C X7R / X6S / X5R:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤3%</td> <td>≤6%</td> <td>0201(50V); 0603≥0.047μF;0805≥0.18μF;1206≥0.47μF</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤5%</td> <td>≤10%</td> <td>0805≥1μF;1210≥10μF</td> </tr> <tr> <td>≤14%</td> <td>0603≥0.33μF;1206≥4.7μF;TT series & Cap≥1μF</td> </tr> <tr> <td>≤15%</td> <td>1206≥6.8μF;0402≥0.1μF;0603≥0.47μF;0805≥2.2μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0603≥0.15μF;0805≥0.68μF;1206≥2.2μF; 1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>TT series & Cap≥1μF;0603≥0.68μF;0805≥2.2μF;1210≥22μF;0402≥0.33μF;1206≥4.7μF</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤7.5%</td> <td>≤15%</td> <td>0603≥0.33μF;0805≥2.2μF;1206≥2.2μF;1210≥22μF;0402≥0.33μF</td> </tr> <tr> <td>≤20%</td> <td>0201≥0.1μF;0402≥1μF;TT series & Cap≥1μF</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30%</td> <td>0402≥2.2μF; 0603≥10μF;1210≥100μF;TT series & Cap≥1μF;0805≥4.7μF</td> </tr> </tbody> </table> <p>X7R / X7E,LD series:DF≤3.0%</p> <p>Y5V:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤7.5%</td> <td>≤10%</td> <td>0603≥0.1μF;0805≥0.47μF;1206≥4.7μF;TT series & Cap≥1μF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤7.5%</td> <td>≤10%</td> <td>0402≥0.047μF;0603≥0.1μF;0805≥0.33μF;1206≥1μF;1210≥4.7μF</td> </tr> <tr> <td>≤15%</td> <td>0402≥0.068μF;0603≥0.47μF;1206≥4.7μF;1210≥22μF;TT series & Cap≥1μF</td> </tr> <tr> <td>16V(C<1μF)</td> <td>≤10%</td> <td>≤12.5%</td> <td>0402≥0.068μF;0603≥0.68μF</td> </tr> <tr> <td></td> <td></td> <td>≤20%</td> <td>0402≥0.22μF</td> </tr> <tr> <td>16V(C≥1μF)</td> <td>≤12.5%</td> <td>≤20%</td> <td>0805≥3.3μF;1206≥10μF;1210≥22μF;1812≥47μF;TT series & Cap≥1μF;0603≥2.2μF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30%</td> <td>0402≥0.47μF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p>* I.R.: ≥10V 1GΩ or 50Ω-F whichever is smaller.</p> <p>Class II (X7R , X7E , X6S , X5R , Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V:X7R</td> <td rowspan="4">RxC≥10 Ω-F</td> </tr> <tr> <td>16V:0402≥0.22μF</td> </tr> <tr> <td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;1206≥4.7μF;1210≥47μF</td> </tr> <tr> <td>6.3V</td> </tr> </tbody> </table>	Rated vol.	D.F.≤	Exception D.F.≤		≥50V	≤3%	≤6%	0201(50V); 0603≥0.047μF;0805≥0.18μF;1206≥0.47μF	35V	≤5%	---	---	25V	≤5%	≤10%	0805≥1μF;1210≥10μF	≤14%	0603≥0.33μF;1206≥4.7μF;TT series & Cap≥1μF	≤15%	1206≥6.8μF;0402≥0.1μF;0603≥0.47μF;0805≥2.2μF	16V	≤5%	≤10%	0603≥0.15μF;0805≥0.68μF;1206≥2.2μF; 1210≥4.7μF	≤15%	TT series & Cap≥1μF;0603≥0.68μF;0805≥2.2μF;1210≥22μF;0402≥0.33μF;1206≥4.7μF	10V	≤7.5%	≤15%	0603≥0.33μF;0805≥2.2μF;1206≥2.2μF;1210≥22μF;0402≥0.33μF	≤20%	0201≥0.1μF;0402≥1μF;TT series & Cap≥1μF	6.3V	≤15%	≤30%	0402≥2.2μF; 0603≥10μF;1210≥100μF;TT series & Cap≥1μF;0805≥4.7μF	Rated vol.	D.F.≤	Exception D.F.≤		≥50V	≤7.5%	≤10%	0603≥0.1μF;0805≥0.47μF;1206≥4.7μF;TT series & Cap≥1μF	35V	≤10%	---	---	25V	≤7.5%	≤10%	0402≥0.047μF;0603≥0.1μF;0805≥0.33μF;1206≥1μF;1210≥4.7μF	≤15%	0402≥0.068μF;0603≥0.47μF;1206≥4.7μF;1210≥22μF;TT series & Cap≥1μF	16V(C<1μF)	≤10%	≤12.5%	0402≥0.068μF;0603≥0.68μF			≤20%	0402≥0.22μF	16V(C≥1μF)	≤12.5%	≤20%	0805≥3.3μF;1206≥10μF;1210≥22μF;1812≥47μF;TT series & Cap≥1μF;0603≥2.2μF	10V	≤20%	≤30%	0402≥0.47μF	6.3V	≤30%	---	---	Rated voltage	Insulation Resistance	100V:X7R	RxC≥10 Ω-F	16V:0402≥0.22μF	10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;1206≥4.7μF;1210≥47μF	6.3V
			Size	Dielectnc	Rated Voltage	Capacitance range																																																																																																																			
			0201	X5R	6.3V 10V	C ≥ 0.1μF																																																																																																																			
			0402	X5R,Y5V	6.3V 10V	C ≥ 1.0μF																																																																																																																			
0603	X5R	6.3V 10V	C ≥ 4.7μF																																																																																																																						
0805	X5R	6.3V	C ≥ 22μF																																																																																																																						
Size	Dielectnc	Rated Voltage	Capacitance range																																																																																																																						
0603	X5R	10V 16V	C ≥ 1.0μF																																																																																																																						
0805	X5R	10V	C ≥ 4.7μF																																																																																																																						
			C ≥ 2.2μF & T=0.85±0.1mm																																																																																																																						
1206	X5R	10V	C ≥ 4.7μF & T=0.85±0.1mm																																																																																																																						
Rated vol.	D.F.≤	Exception D.F.≤																																																																																																																							
≥50V	≤3%	≤6%	0201(50V); 0603≥0.047μF;0805≥0.18μF;1206≥0.47μF																																																																																																																						
35V	≤5%	---	---																																																																																																																						
25V	≤5%	≤10%	0805≥1μF;1210≥10μF																																																																																																																						
		≤14%	0603≥0.33μF;1206≥4.7μF;TT series & Cap≥1μF																																																																																																																						
		≤15%	1206≥6.8μF;0402≥0.1μF;0603≥0.47μF;0805≥2.2μF																																																																																																																						
16V	≤5%	≤10%	0603≥0.15μF;0805≥0.68μF;1206≥2.2μF; 1210≥4.7μF																																																																																																																						
		≤15%	TT series & Cap≥1μF;0603≥0.68μF;0805≥2.2μF;1210≥22μF;0402≥0.33μF;1206≥4.7μF																																																																																																																						
10V	≤7.5%	≤15%	0603≥0.33μF;0805≥2.2μF;1206≥2.2μF;1210≥22μF;0402≥0.33μF																																																																																																																						
		≤20%	0201≥0.1μF;0402≥1μF;TT series & Cap≥1μF																																																																																																																						
6.3V	≤15%	≤30%	0402≥2.2μF; 0603≥10μF;1210≥100μF;TT series & Cap≥1μF;0805≥4.7μF																																																																																																																						
Rated vol.	D.F.≤	Exception D.F.≤																																																																																																																							
≥50V	≤7.5%	≤10%	0603≥0.1μF;0805≥0.47μF;1206≥4.7μF;TT series & Cap≥1μF																																																																																																																						
35V	≤10%	---	---																																																																																																																						
25V	≤7.5%	≤10%	0402≥0.047μF;0603≥0.1μF;0805≥0.33μF;1206≥1μF;1210≥4.7μF																																																																																																																						
		≤15%	0402≥0.068μF;0603≥0.47μF;1206≥4.7μF;1210≥22μF;TT series & Cap≥1μF																																																																																																																						
16V(C<1μF)	≤10%	≤12.5%	0402≥0.068μF;0603≥0.68μF																																																																																																																						
		≤20%	0402≥0.22μF																																																																																																																						
16V(C≥1μF)	≤12.5%	≤20%	0805≥3.3μF;1206≥10μF;1210≥22μF;1812≥47μF;TT series & Cap≥1μF;0603≥2.2μF																																																																																																																						
10V	≤20%	≤30%	0402≥0.47μF																																																																																																																						
6.3V	≤30%	---	---																																																																																																																						
Rated voltage	Insulation Resistance																																																																																																																								
100V:X7R	RxC≥10 Ω-F																																																																																																																								
16V:0402≥0.22μF																																																																																																																									
10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF;1206≥4.7μF;1210≥47μF																																																																																																																									
6.3V																																																																																																																									
16.	ESR (For RF Series only)	The ESR should be measured at room temperature and tested at frequency 1±0.1 GHz with the equivalent of Agilent 4287A meter.	<table border="1"> <thead> <tr> <th>0201,0402</th> <th>0603</th> </tr> </thead> <tbody> <tr> <td>0.5pF≤Caps≤1pF: < 350mΩ</td> <td>0.3pF≤Caps≤1pF: < 1500mΩ</td> </tr> <tr> <td>1pF<Caps≤5pF: < 300mΩ</td> <td>1.0pF<Caps≤10pF: < 250mΩ</td> </tr> <tr> <td>5pF<Caps≤22pF: < 250mΩ</td> <td>10pF<Caps≤47pF: < 200mΩ</td> </tr> </tbody> </table>	0201,0402	0603	0.5pF≤Caps≤1pF: < 350mΩ	0.3pF≤Caps≤1pF: < 1500mΩ	1pF<Caps≤5pF: < 300mΩ	1.0pF<Caps≤10pF: < 250mΩ	5pF<Caps≤22pF: < 250mΩ	10pF<Caps≤47pF: < 200mΩ																																																																																																														
			0201,0402	0603																																																																																																																					
0.5pF≤Caps≤1pF: < 350mΩ	0.3pF≤Caps≤1pF: < 1500mΩ																																																																																																																								
1pF<Caps≤5pF: < 300mΩ	1.0pF<Caps≤10pF: < 250mΩ																																																																																																																								
5pF<Caps≤22pF: < 250mΩ	10pF<Caps≤47pF: < 200mΩ																																																																																																																								

◆ Constructions

NO.	Name	NPO/X7R/X7E	NPO/X7R/X5R/Y5V
①	Ceramic material	BaTiO ₃ based	
②	Inner electrode	AgPd alloy	Ni
③	Termination	Inner layer	Cu
④		Middle layer	Ni
⑤		Outer layer	Sn (Matt)

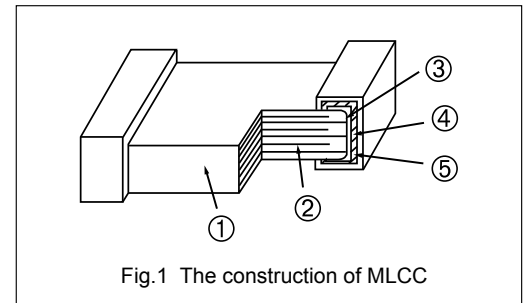


Fig.1 The construction of MLCC

◆ Storage and handling conditions

- (1) To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions.
- (2) The product is recommended to be used within 6 months after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

- a. Don't store products in a corrosive environment such as sulfide, chloride gas, or acid. It may cause oxidization of electrode, which easily be resulted in poor soldering.
- b. To store products on the shelf and avoid exposure to moisture.
- c. Don't expose products to excessive shock, vibration, direct sunlight and so on.

◆ Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N₂ within oven are recommended.

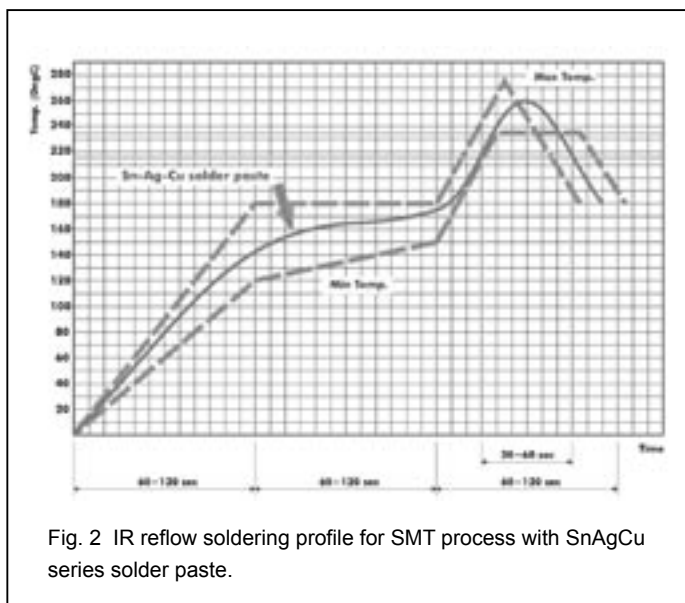


Fig. 2 IR reflow soldering profile for SMT process with SnAgCu series solder paste.

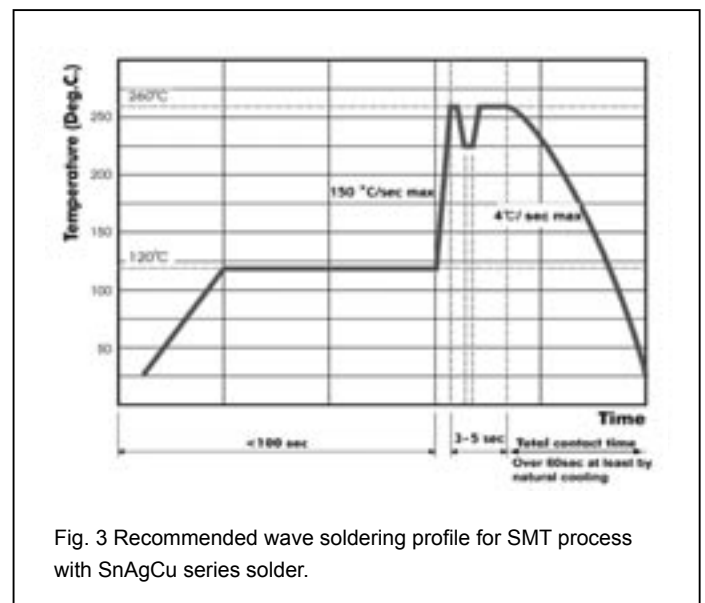


Fig. 3 Recommended wave soldering profile for SMT process with SnAgCu series solder.

Appendix I : Reliability Test Conditions and Requirements

www.passivecomponent.com

Table 2. For MT series (AEC-Q200)

NO.	Item	AEC-Q200 Test Condition	Requirements									
1.	Pre-and Post-Stress Electrical Test	---										
2.	High Temperature Exposure (Storage) MIL-STD-202 Method 108	<ul style="list-style-type: none"> * Test temp.: 150±3°C * Unpowered. * Test time: 1000+24/-0 hrs. * Measurement to be made after keeping at room temp. for 24±2 hrs. 	<ul style="list-style-type: none"> * No remarkable damage. * Cap change: within ±2.5% or ±0.25pF whichever is larger. * Q/D.F. value: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C. * I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller. 									
3.	Temperature Cycling JESD22 Method JA-104	<ul style="list-style-type: none"> * Conduct 1000 cycles according to the temperatures and time. <table border="1"> <thead> <tr> <th>Step</th> <th>Temp. (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55°C +0/-3</td> <td>5±1</td> </tr> <tr> <td>2</td> <td>+125°C +3/-0</td> <td>5±1</td> </tr> </tbody> </table> <ul style="list-style-type: none"> * Measurement to be made after keeping at room temp. for 24±2 hrs. 	Step	Temp. (°C)	Time (min.)	1	-55°C +0/-3	5±1	2	+125°C +3/-0	5±1	<ul style="list-style-type: none"> * No remarkable damage. * Cap change: within ±2.5% or 0.25pF whichever is larger. * Q/D.F. value: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C. * I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller.
Step	Temp. (°C)	Time (min.)										
1	-55°C +0/-3	5±1										
2	+125°C +3/-0	5±1										
4.	Destructive Physical Analysis EIA-469	Per EIA-469	No defects or abnormalities									
5.	Moisture Resistance MIL-STD-202 Method 106	<ul style="list-style-type: none"> * Test temp.: 25~65°C * Humidity: 80~100% RH * Test time: 10 cycles, t=24hrs/cycle. * Measurement to be made after keeping at room temp. for 24±2 hrs. 	<ul style="list-style-type: none"> * No remarkable damage. * Cap change : within ±3.0% or 0.30pF whichever is larger * Q/D.F. value: More than 30pF Q≥350 ; 10pF≤C<30pF, Q≥275+2.5C Less than 10pF Q≥200+10C * I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller. 									
6.	Biased Humidity MIL-STD-202 Method 103	<ul style="list-style-type: none"> * Test temp.: 85±3°C * Humidity: 85%RH * Test time: 1000+24/-0 hrs. * To apply voltage Grated voltage and 1.3~1.5Vdc. (add 100kohm resistor) * Measurement to be made after keeping at room temp. for 24±2 hrs. 	<ul style="list-style-type: none"> * No remarkable damage. * Cap change: within ±3.0% or 0.30pF whichever is larger. * Q/D.F. value: C≥30pF , Q≥200 ; C<30pF , Q≥100+10/3C * I.R.: ≥1GΩ or RxC≥50Ω-F whichever is smaller. 									
7.	Operational Life MIL-STD-202 Method 108	<ul style="list-style-type: none"> * Test temp.: 125±3°C * To apply voltage: full rated voltage. * Test time: 1000+24/-0 hrs. * Measurement to be made after keeping at room temp. for 24±2 hrs. 	<ul style="list-style-type: none"> * No remarkable damage. * Cap change: within ±3.0% or ±0.3pF whichever is larger * Q/D.F. value: More than 30pF, Q≥350 ; 10pF≤C<30pF, Q≥275+2.5C Less than 10pF, Q≥200+10C * I.R.: ≥1GΩ or RxC≥50Ω-F whichever is smaller. 									
8.	External Visual MIL-STD-883 Method 2009	Visual inspection	No remarkable defect.									
9.	Physical Dimension JESD22 Method JB-100	Using by calipers	Within the specified dimensions									
10.	Resistance to Solvents MIL-STD-202 Method 215	<ul style="list-style-type: none"> * Temperature: 25±5°C * Time: 3+0.5/-0 min. * Solvent: Iso-propyl alcohol. 	<ul style="list-style-type: none"> * No remarkable damage. * Cap.: within the specified tolerance. * Q/D.F. value: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C. * I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller. 									
11.	Mechanical Shock MIL-STD-202 Method 213	<ul style="list-style-type: none"> * Peak value: 1500g's. * Wave: 1/2 sine. * Velocity: 15.4 ft/sec * Three shocks in each direction should be applied along 3 mutually perpendicular axes of the test specimen (18 shocks) 	<ul style="list-style-type: none"> * No remarkable damage. * Cap.: within the specified tolerance. * Q/D.F. value: Cap≥30pF, Q≥1000 ; Cap<30pF, Q≥400+20C. * I.R.: ≥10GΩ or RxC≥500Ω-F whichever is smaller. 									

Appendix I : Reliability Test Conditions and Requirements

www.passivecomponent.com

NO.	Item	AEC-Q200 Test Condition	Requirements									
12.	Vibration MIL-STD-202 Method 204	<ul style="list-style-type: none"> * Vibration frequency: 10~2000 Hz/min. (5g's for 20 min) * Total amplitude: 1.5mm * 12 cycles each of 3 orientations (36 times) 	<ul style="list-style-type: none"> * No remarkable damage. * Cap.: within the specified tolerance. * Q/D.F. value: Cap\geq30pF, Q\geq1000 ; Cap<30pF, Q\geq400+20C. * I.R.: \geq10GΩ or RxC\geq5000Ω-F whichever is smaller. 									
13.	Resistance to Soldering Heat MIL-STD-202 Method 210	<ul style="list-style-type: none"> * Solder temperature: 270\pm5$^{\circ}$C * Dipping time: 10\pm1 sec * Measurement to be made after keeping at room temp. for 24\pm2 hrs. 	<ul style="list-style-type: none"> * No remarkable damage. * Cap change: within \pm2.5% or 0.25pF whichever is larger * Q/D.F. value: Cap\geq30pF, Q\geq1000 ; Cap<30pF, Q\geq400+20C. * I.R.: \geq10GΩ or RxC\geq5000Ω-F whichever is smaller. 									
14.	Thermal Shock MIL-STD-202 Method 107	<ul style="list-style-type: none"> * Conduct 300 cycles according to the temperatures and time. <table border="1"> <thead> <tr> <th>Step</th> <th>Temp. ($^{\circ}$C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55$^{\circ}$C +0/-3</td> <td>15\pm3</td> </tr> <tr> <td>2</td> <td>+125$^{\circ}$C +3/-0</td> <td>15\pm3</td> </tr> </tbody> </table> <ul style="list-style-type: none"> * Max. transfer time: 20 sec. * Measurement to be made after keeping at room temp. for 24\pm2 hrs. 	Step	Temp. ($^{\circ}$ C)	Time (min.)	1	-55 $^{\circ}$ C +0/-3	15 \pm 3	2	+125 $^{\circ}$ C +3/-0	15 \pm 3	<ul style="list-style-type: none"> * No remarkable damage. * Cap change: within \pm2.5% or 0.25pF whichever is larger * Q/D.F. value: Cap\geq30pF, Q\geq1000 ; Cap<30pF, Q\geq400+20C. * I.R.: \geq10GΩ or RxC\geq5000Ω-F whichever is smaller.
Step	Temp. ($^{\circ}$ C)	Time (min.)										
1	-55 $^{\circ}$ C +0/-3	15 \pm 3										
2	+125 $^{\circ}$ C +3/-0	15 \pm 3										
15.	ESD AEC-Q200-002	Per AEC-Q200-002	<ul style="list-style-type: none"> * No remarkable damage. * Cap.: within the specified tolerance. * Q/D.F. value: Cap\geq30pF, Q\geq1000 ; Cap<30pF, Q\geq400+20C. * I.R.: \geq10GΩ or RxC\geq5000Ω-F whichever is smaller. 									
16.	Solderability J-STD-002 JESD22-B102E	<ul style="list-style-type: none"> * Condition A Un-mounted chips 4hrs / 155$^{\circ}$C*dry then completely immersed for 5\pm0.5 sec in solder bath at 245\pm5$^{\circ}$C. * Condition B Un-mounted chips steam 8 hrs then completely immersed for 10\pm1sec in solder bath at 220+5/-0$^{\circ}$C. * Condition C Un-mounted chips steam 8 hrs then completely immersed for 10\pm1 sec. in solder bath at 260+0/-5$^{\circ}$C. 	All terminations shall exhibit a continuous solder coating free from defects from a minimum of 95% of the critical surface area of any individual termination.									
17.	Electrical Characterization	<ul style="list-style-type: none"> * Capacitance * Q/ D.F. (Dissipation Factor) Cap\leq1000pF 1.0\pm0.2Vrms, 1MHz\pm10% Cap>1000pF 1.0\pm0.2Vrms, 1KHz\pm10% * Insulation Resistance To apply rated voltage for max. 120 sec. * Dielectric Strength To apply 250% of rated voltage, duration 1~5 sec, charge and discharge current less than 50mA. * Temperature Coefficient (with no electrical load) Operation temperature: -55~125$^{\circ}$C at 25$^{\circ}$C 	<ul style="list-style-type: none"> * Capacitance within the specified tolerance. * Cap\geq30pF, Q\geq1000 ; Cap<30pF, Q\geq400+20C. * I.R. \geq10GΩ or RxC\geq5000Ω-F whichever is smaller. * Dielectric strength No evidence of damage or flash over during test. * Temperature Coefficient Capacitance Change: Within \pm30ppm/$^{\circ}$C 									
18.	Board Flex AEC-Q200-005	<ul style="list-style-type: none"> * The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 3mm and then the pressure shall be maintained for 5\pm1 sec. * Measurement to be made after keeping at room temp. for 24\pm2 hrs. 	<ul style="list-style-type: none"> * No remarkable damage. * Cap change: within \pm5% or 0.5 whichever is larger (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.) 									
19.	Terminal Strength AEC-Q200-006	<ul style="list-style-type: none"> * Pressurizing force :2N (0402), 10N(0603), 18N(0805). * Test time: 60\pm1 sec. 	<ul style="list-style-type: none"> * No remarkable damage or removal of the terminations. * Capacitance within the specified tolerance. * Cap\geq30pF, Q\geq1000 ; Cap<30pF, Q\geq400+20C. * I.R. \geq10GΩ or RxC\geq5000Ω-F whichever is smaller. 									
20.	Beam Load Test AEC-Q200-003	<ul style="list-style-type: none"> * Break strength test * Beam speed: 2.5\pm0.25 mm/sec 	<ul style="list-style-type: none"> The chip endure following force * Chip length \leq2.5mm: Thickness >0.5mm (20N), \leq0.5mm (8N) * Chip length \geq3.2mm: Thickness \geq1.25mm (54.5N), <1.25mm (15N) 									

PLAN & MEMO

www.passivecomponent.com

A series of horizontal dotted lines for writing.

Yang-Mei Plant / Sales Office

Walsin Technology Corporation
556-1, Kao-Shi Road, Yang-Mei,
Tao-Yuan, Taiwan
Tel: +886-3-475-8711
Fax: +886-3-475-7130
Email: info@passivecomponent.com

Kaohsiung Plant, Taiwan

Walsin Technology Corporation
1st, West 13 Street, K.E.P.Z.
Kaohsiung, Taiwan
Tel: +886-7-821-8171
Fax: +886-7-813-1661
Email: info@passivecomponent.com

China - Dalang Plant / Sales Office

Dongguan Walsin Tech. Electronics CO., Ltd.
Xiniupo Administrative Zone,
Dalang Town, Dongguan City,
Guangdong Province 523799
Tel: +86-769-83115168
Fax: +86-769-83115188
Email: stlin@passivecomponent.com

China - Suzhou Plant / Sales Office

Suzhou Walsin Technology Electronics Co., Ltd.
No. 369, Changyan Street,
Suzhou Industrial Park,
Jiangsu Province 215126
Tel: +86-512-628-36888
Fax: +86-512-628-37888
Email: lewisliang@passivecomponent.com

China - Guangzhou Plant / Sales Office

Pan Overseas (Guangzhou) Electronic Co., Ltd.
No. 277, Hong Ming Road, Eastern Section,
Guangzhou Economic and Technology
Development Zone, China
Tel: +86-20-8223-7476
Fax: +86-20-8223-7475
Email: info@passivecomponent.com

China - Tianjin Sales Office

Walsin Technology Corporation (Tian Jin)
No.51 The Ninth Avenue, Tianjin Technological
Development Area(TEDA) Tianjin 300457
Tel: +86-22-59820009
Fax: +86-22-59820008
Email: Johnsonwang@passivecomponent.com

Germany - Munich Sales Office

Walsin Technology Corporation Europe
Stefan-George-Ring 29, 81929 Munich, Germany
Tel: +49-(0)89-9308-6475
Fax: +49-(0)89-9308-6464
Email: aw@passivecomponent.com

Singapore - Sales Office

Walsin Electronics (S) Pte. Ltd.
2 Jurong East Street 21,
#04-33F IMM Building,
Singapore 609601
Tel: +65-6794-3600
Fax: +65-6861-3381
Email: peterchew@sg.passivecomponent.com

United States - West Coast Sales Office

Walsin Technology Corporation, USA
39500 Stevenson Place Suite 101,
Fremont, CA 94539, USA
Tel: +1-510-713-1190
Email: leeku@passivecomponent.com

JAPAN - R&D / Sales Office

Walsin Technology Corporation (Japan)
D-442, KSP R&D Business Park Building,
3-2-1 Sakado Takatsuku, Kawasaki City,
Kanagawa 213-0012, Japan
Tel: +81-44-829-4626
Fax: +81-44-829-4723
Nitsuko Electronic Corporation
Tel: +81-44-820-1570
Fax: +81-44-820-1571
Email: sakanotsu@nitsuko-ele.co.jp



Yang-Mei

Walsin Technology Corporation
566-1, Kao-Shi Road, Yang-Mei,
Tao-Yuan, Taiwan
Tel: 886-3-475-8711
Fax: 886-3-475-7129 475-7130
E-mail: info@passivecomponent.com

Kaohsiung

Walsin Technology Corporation
1st, West 13 Street, K.E.P.Z.
Kaohsiung, Taiwan
Tel: 886-7-821-8171
Fax: 886-7-813-1661
E-mail: info@passivecomponent.com