

### Main product characteristics

$I_{F(AV)}$	3 A
$V_{RRM}$	40 V
$T_j$ (max)	150° C
$V_F$ (max)	0.57 V


### Features and Benefits

- Very small conduction losses
- Negligible switching losses
- Low forward voltage drop
- Low thermal resistance
- Extremely fast switching
- Surface mounted device
- Avalanche capability specified

### Description

Single chip Schottky rectifier suited for switch mode power supplies and high frequency DC to DC converters.

Packaged in DPAK, SMC, SMB, and low profile SMB, this device is intended for use in low and medium voltage operation, high frequency inverters, free wheeling and polarity protection applications where low switching losses are required.

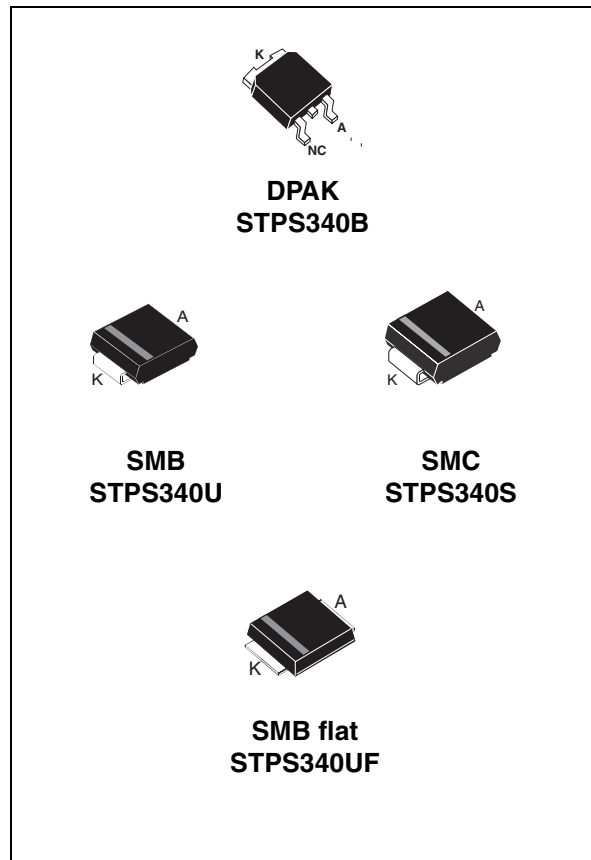

### Order codes

Part Number	Marking
STPS340U	U34
STPS340S	S34
STPS340B	S340
STPS340B-TR	S340
STPS340UF	FU34

# 1 Characteristics

**Table 1. Absolute Ratings (limiting values)**

Symbol	Parameter		Value	Unit	
V <sub>RRM</sub>	Repetitive peak reverse voltage		40	V	
I <sub>F(RMS)</sub>	RMS forward current		6	A	
I <sub>F(AV)</sub>	Average forward current	T <sub>c</sub> = 135° C δ = 0.5	DPAK	3	A
		T <sub>L</sub> = 105° C δ = 0.5	SMB/SMC		
		T <sub>L</sub> = 115° C δ = 0.5	SMB flat		
I <sub>FSM</sub>	Surge non repetitive forward current	t <sub>p</sub> = 10 ms sinusoidal	75	A	
P <sub>ARM</sub>	Repetitive peak avalanche power	t <sub>p</sub> = 1 μs T <sub>j</sub> = 25° C	1300	W	
T <sub>stg</sub>	Storage temperature range		-65 to + 150	°C	
T <sub>j</sub>	Operating junction temperature <sup>(1)</sup>		150	°C	

1.  $\frac{dT_{tot}}{dT_j} < \frac{1}{R_{th(j-a)}}$  condition to avoid thermal runaway for a diode on its own heatsink

**Table 2. Thermal resistance**

Symbol	Parameter		Value	Unit
R <sub>th(j-l)</sub>	Junction to lead	SMB	25	°C/W
		SMB flat	15	
		SMC	20	
R <sub>th(j-c)</sub>	Junction to case	DPAK	5.5	°C/W

**Table 3. Static electrical characteristics**


Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
I <sub>R</sub> <sup>(1)</sup>	Reverse leakage current	T <sub>j</sub> = 25° C	V <sub>R</sub> = V <sub>RRM</sub>			20	μA
		T <sub>j</sub> = 125° C			2	10	mA
V <sub>F</sub> <sup>(1)</sup>	Forward voltage drop	T <sub>j</sub> = 25° C	I <sub>F</sub> = 3 A			0.63	V
		T <sub>j</sub> = 125° C			0.52	0.57	
		T <sub>j</sub> = 25° C	I <sub>F</sub> = 6 A			0.84	
		T <sub>j</sub> = 125° C			0.63	0.72	

1. Pulse test: t<sub>p</sub> = 380 μs, δ < 2%


To evaluate the conduction losses use the following equation:

$$P = 0.42 \times I_{F(AV)} + 0.050 I_{F(RMS)}^2$$


**Figure 1. Average forward power dissipation versus average forward current (per diode)**

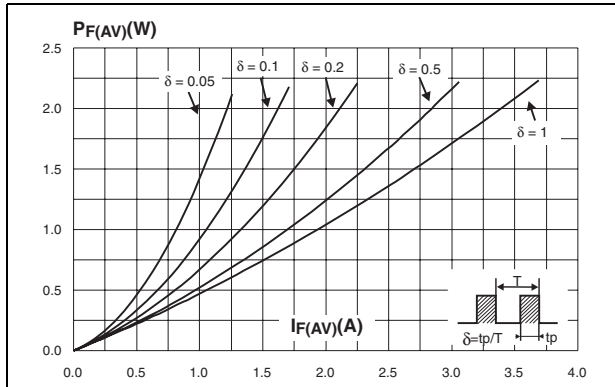


**Figure 2. Average forward current versus ambient temperature ( $\delta = 0.5$ , per diode) (DPAK / SMB / SMC)**

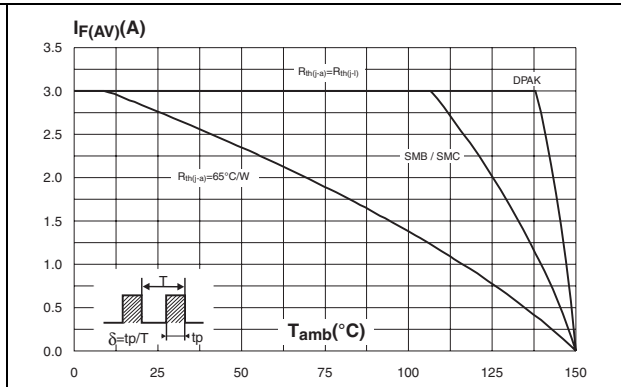


**Figure 3. Average forward current versus ambient temperature ( $\delta = 0.5$ , per diode) (SMB flat)**

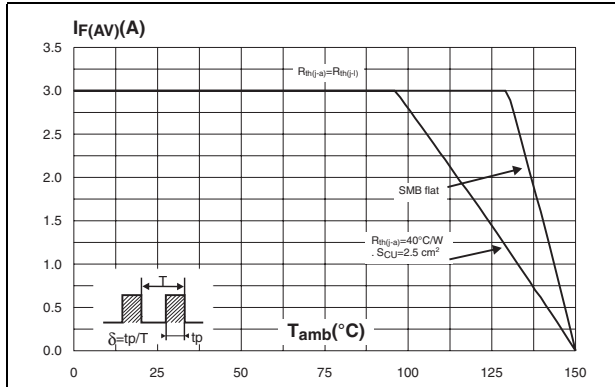


**Figure 4. Non repetitive surge peak forward current versus overload duration (maximum values) (DPAK)**

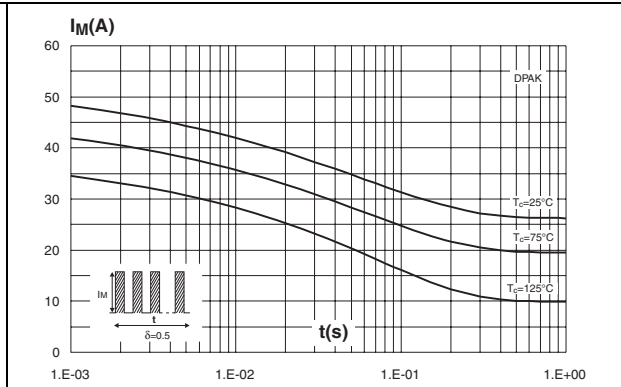


**Figure 5. Non repetitive surge peak forward current versus overload duration (maximum values) (SMB)**

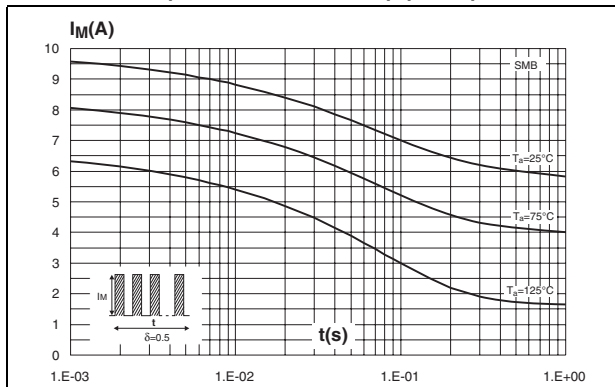


**Figure 6. Non repetitive surge peak forward current versus overload duration (maximum values) (SMC)**

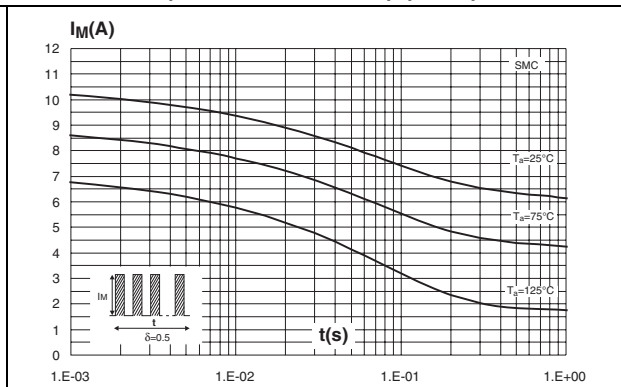


**Figure 7. Non repetitive surge peak forward current versus overload duration (maximum values) SMB flat**

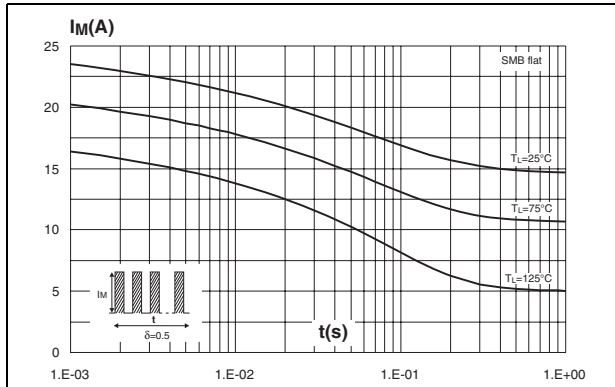


**Figure 8. Normalized avalanche power derating versus pulse duration**

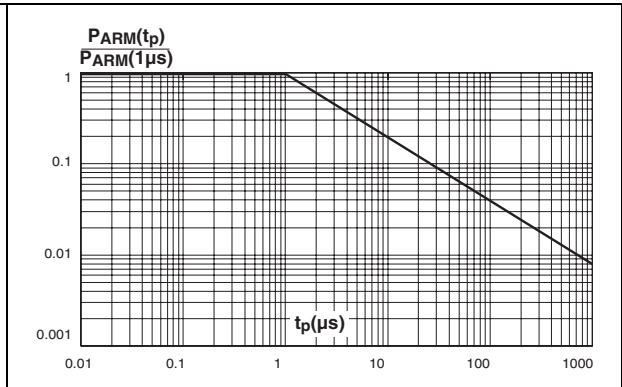


**Figure 9. Normalized avalanche power derating versus junction temperature**

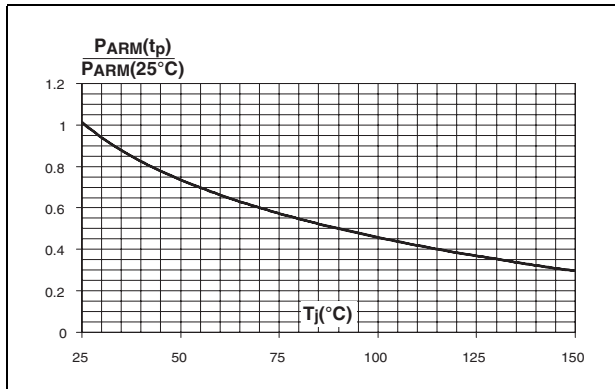


**Figure 10. Relative variation of thermal impedance junction to ambient versus pulse duration (DPAK)**

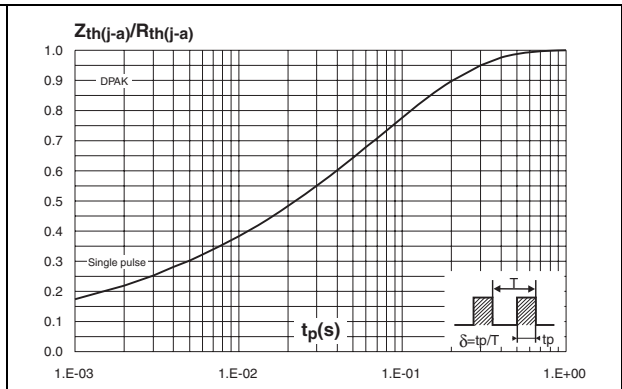


**Figure 11. Relative variation of thermal impedance junction to ambient versus pulse duration (SMB)**

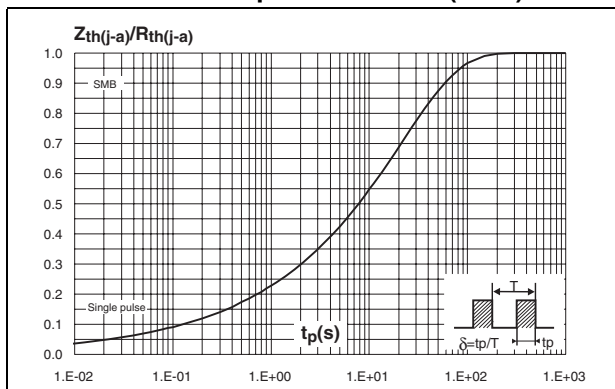


**Figure 12. Relative variation of thermal impedance junction to ambient versus pulse duration (SMC)**

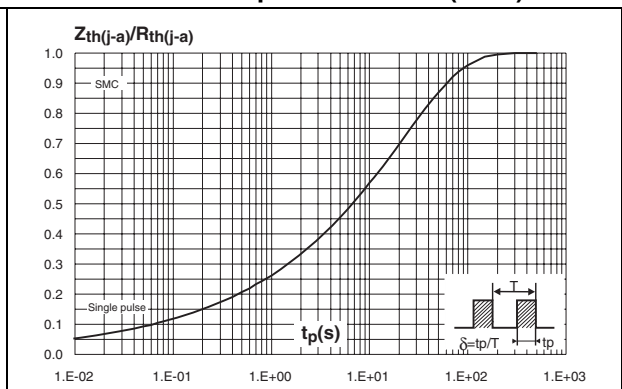


**Figure 13. Relative variation of thermal impedance junction to lead versus pulse duration - SMB flat**

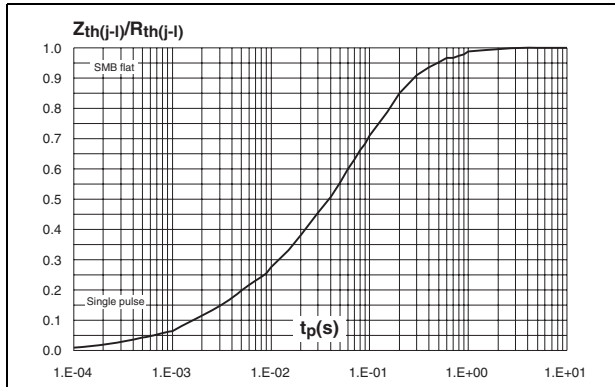


**Figure 14. Reverse leakage current versus reverse voltage applied (typical values)**

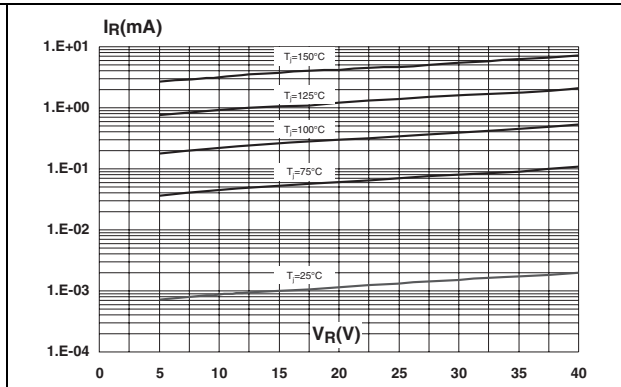


**Figure 15. Junction capacitance versus reverse voltage applied (typical values)**

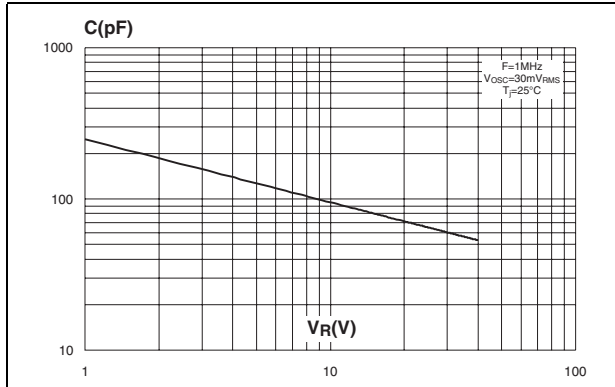


**Figure 16. Forward voltage drop versus forward current**

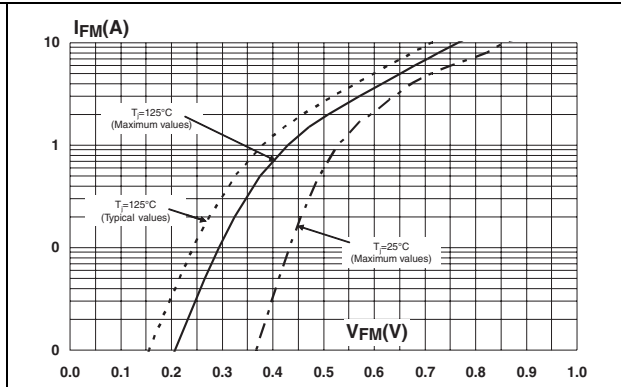


**Figure 17. Thermal resistance junction to ambient versus copper surface under each lead (epoxy printed board FR4,  $e_{CU} = 35 \mu m$ ) (DPAK)**

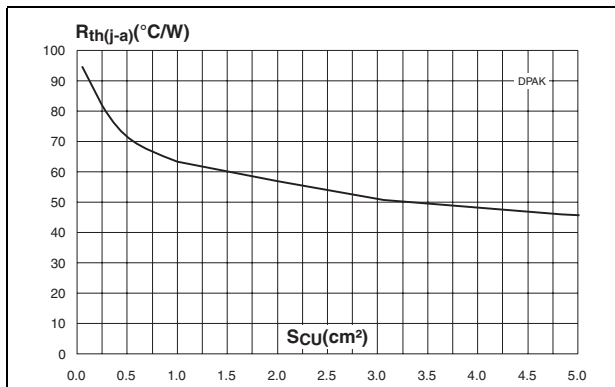

**Figure 18. Thermal resistance junction to ambient versus copper surface under each lead (epoxy printed board FR4,  $e_{CU} = 35 \mu m$ ) (SMB / SMC)**

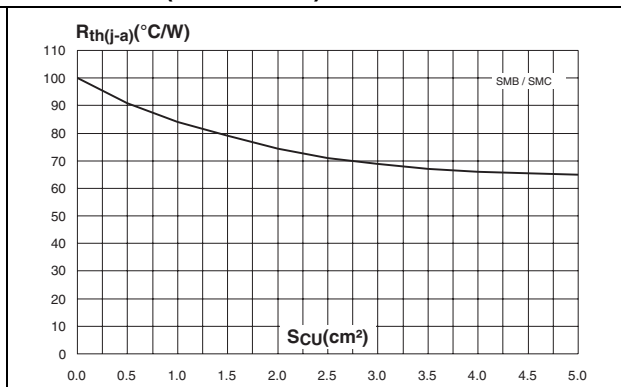

**Figure 19. Thermal resistance junction to ambient versus copper surface under each lead (epoxy printed board FR4,  $e_{CU} = 35 \mu\text{m}$ ) (SMB flat)**

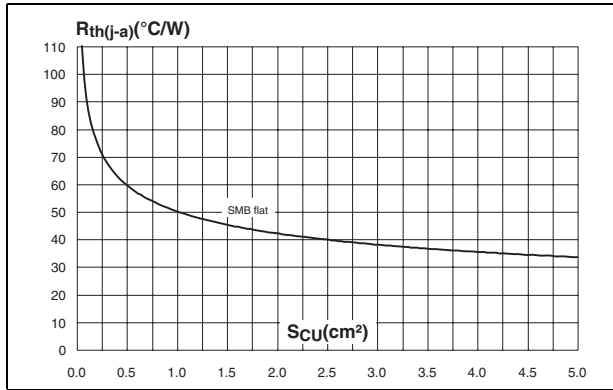

## 2 Package Information

- Band indicates cathode on SMB and SMC
- Epoxy meets UL94, V0

**Table 4. DPAK dimensions**

Ref	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.20	2.40	0.086	0.094
A1	0.90	1.10	0.035	0.043
A2	0.03	0.23	0.001	0.009
B	0.64	0.90	0.025	0.035
B2	5.20	5.40	0.204	0.212
C	0.45	0.60	0.017	0.023
C2	0.48	0.60	0.018	0.023
D	6.00	6.20	0.236	0.244
E	6.40	6.60	0.251	0.259
G	4.40	4.60	0.173	0.181
H	9.35	10.10	0.368	0.397
L2	0.80 typ.		0.031 typ.	
L4	0.60	1.00	0.023	0.039
V2	0°	8°	0°	8°

Figure 20. DPAK footprint dimensions (in millimeters)


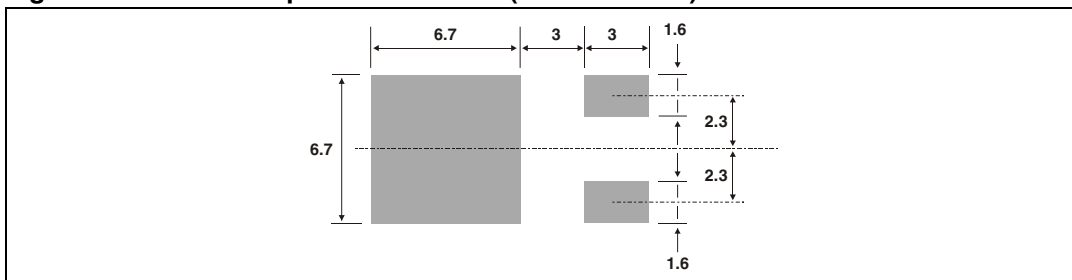


Table 5. SMB dimensions

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.075	0.096
A2	0.05	0.20	0.002	0.008
b	1.95	2.20	0.077	0.087
c	0.15	0.40	0.006	0.016
E	5.10	5.60	0.201	0.220
E1	4.05	4.60	0.159	0.181
D	3.30	3.95	0.130	0.156
L	0.75	1.50	0.030	0.059

Figure 21. SMB footprint (dimensions in mm)

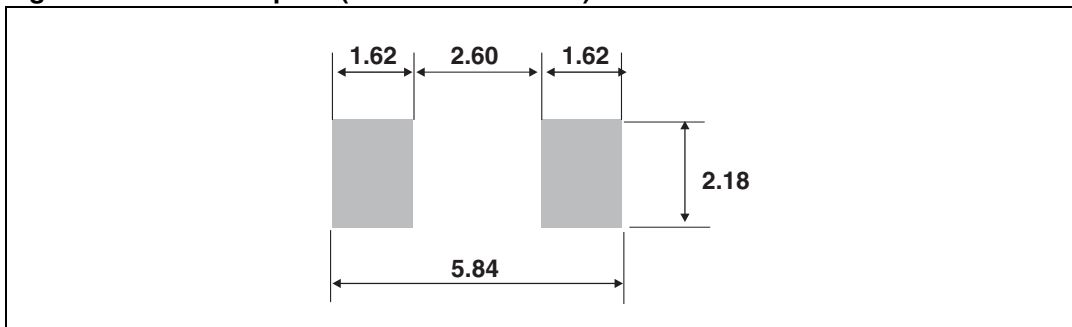


**Table 6. SMB Flat dimensions**

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.90		1.10	0.035		0.043
b <sup>(1)</sup>	1.95		2.20	0.077		0.087
c <sup>(1)</sup>	0.15		0.40	0.006		0.016
D	3.30		3.95	0.130		0.156
E	5.10		5.60	0.200		0.220
E1	4.05		4.60	0.189		0.181
L	0.75		1.50	0.029		0.059
L1		0.40			0.016	
L2		0.60			0.024	

1. Applies to plated leads

**Figure 22. SMB Flat footprint (dimensions in mm)**

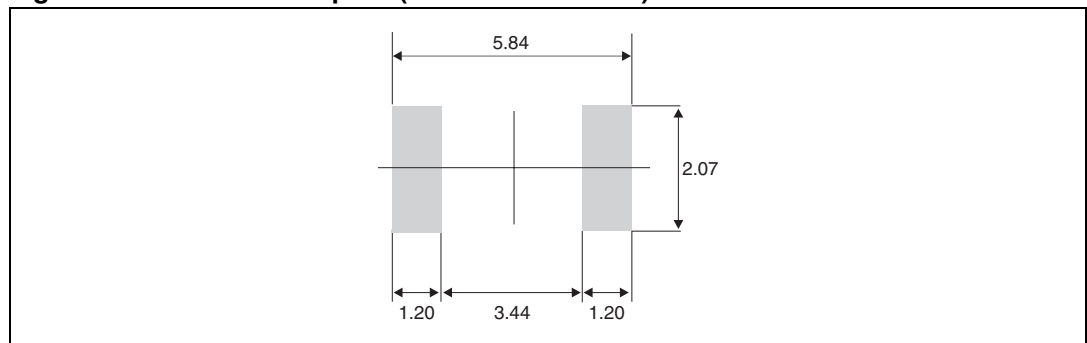




**Table 7. SMC package mechanical data**

Ref	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.075	0.096
A2	0.05	0.20	0.002	0.008
b	2.90	3.2	0.114	0.126
c	0.15	0.41	0.006	0.016
E	7.75	8.15	0.305	0.321
E1	6.60	7.15	0.260	0.281
E2	4.40	4.70	0.173	0.185
D	5.55	6.25	0.218	0.246
L	0.75	1.40	0.030	0.063

**Figure 23. Foot print dimensions (in millimeters)**

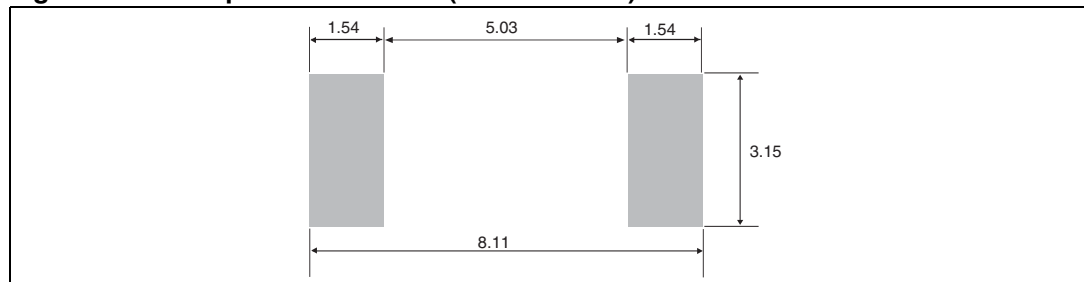

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com).

### 3 Ordering information

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPS340U	U34	SMB	0.107 g	2500	Tape and reel
STPS340S	S34	SMC	0.243 g	2500	
STPS340B	S340	DPAK	0.30 g	75	Tube
STPS340B-TR				2500	Tape and reel
STPS340UF	FU34	SMB flat	0.50 g	5000	Tape and reel

### 4 Revision history

Date	Revision	Description of Changes
Jul-2003	7B	Last update.
Feb-2005	8	Layout update. No content change.
08-Feb-2007	9	Reformatted to current standard. Added ECOPACK statement. Added SMB flat package.

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STPS340B-TR](#) [STPS340U](#) [STPS340S](#) [STPS340UF](#)