


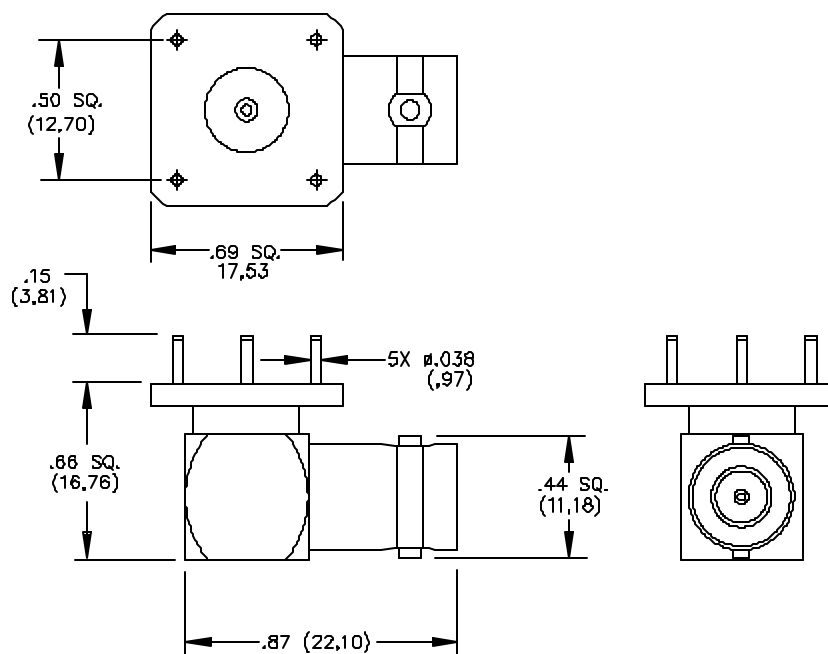

MATERIALS:

Body: Brass, Tarnish Resistant Plating, Center Contact: Gold Plated Beryllium Copper

Mounting Pins: Brass

Dielectric: Teflon per L-P-403

RATINGS:

Operating Voltage: 500 VRMS Max.

Operating Temperature: -65°C (-85°F) to +165°C (+329° F).

Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 4788

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

4788