


Aluminum Electrolytic Capacitors		
Series:	Arcotronics P/N:	Customer:
EDK	EDK106M025A9BAA	

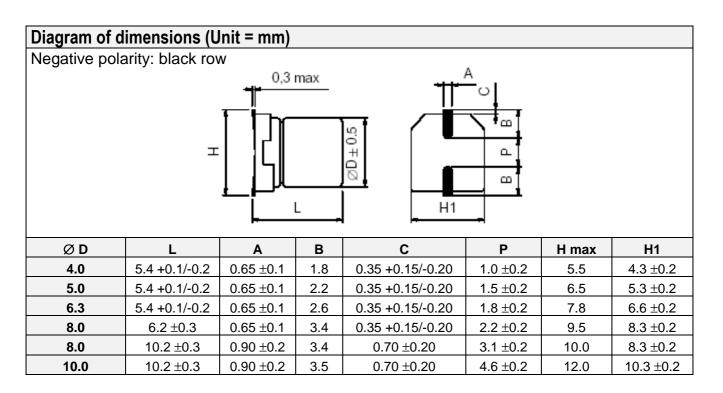

Electrical and mechanical characteristics		
Rated capacitance (± 20% at 120Hz / 20℃)	10μF	
Rated voltage	25Vdc	
Surge voltage	32Vdc	
Case size D x L	Ø 4.0x5.4mm	
Operating temperature	-40 to +85℃	
Dissipation factor tgδ % (120Hz / 20℃)	16%	
Ripple current (120Hz / 85℃)	24mA _{rms}	
Leakage current (2 min / 20℃)	3 μA	
Load life test	85℃ - 2000h	

Please refer to our Internet address for others or updated technical information on "Aluminum Electrolytic Capacitors 2008" catalogue.

R. Colombari Issue: 1 30th May 2011

All product specifications, statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute – and we specifically disclaim – any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kemet:

EDK106M025A9BAA