



## Technical Data Sheet

Part Number: AA115C104K4R

RoHS Compliant

SpinGuard<sup>®</sup> Product Line

Date: January, 2011


1.0 Electrical Characteristics : AA115C104K4R

Capacitance @ 25 C, 1kHz, 1 Vrms	.10 $\mu$ F
Capacitance Tolerance	+/- 10 %
Dissipation Factor @ 25 C	2.5 % Max
Rated Voltage	50 Vdc
Dielectric Withstand Voltage	125 Vdc
Insulation Resistance @ 25 C @ Rated Voltage	10000 Mohms

2.0 Temperature Characteristics

X7R (-55 to + 125C  
+/- 15% @ 0Vdc)

3.0 Capacitor Dimensions.

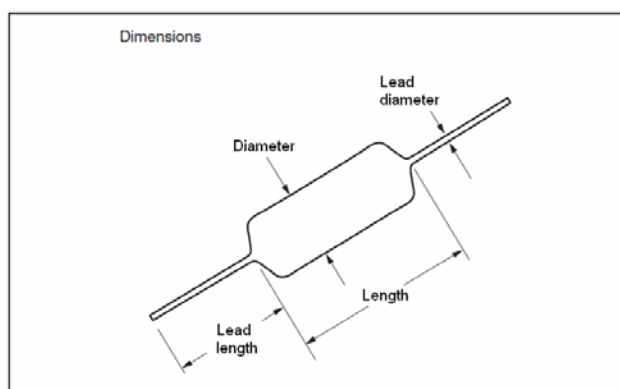

Part Number	Length	Diameter	Lead Length	Lead Diameter
AA115C104K4R	0.170" max	0.120" max	1.000" +/- .015	.0177" +/- .002
	4.32 mm max	3.05 mm max	25.40 mm +/- 0.38	.45 mm +/- 0.05

4.0 Lead Wire

Core	Steel
Plating	200-300 u" Sn
Underlying	40-60 u" Ni

5.0 Marking Schemes:

First Line: Character 1.....: A for AVX  
 Character 2.....: 5 for 50 volts  
 Character 3.....: C for Temperature Characteristics


Second Line: Three digit Capacitance Code.

Third Line: Character 1.....: Capacitance Tolerance Code  
 Characters 2-3.....: Two Digit Lot Code

Fourth Line: Three Digit Date Code.

6.0 Packaging.- Tape and Reel Ø 14" : 7500 pieces.

7.0 Part Numbering System

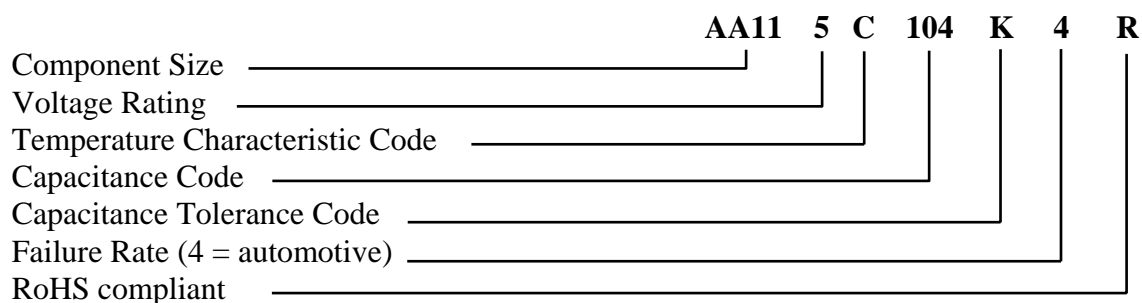

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[AVX:](#)

[AA115C104K4R](#)