

**Micro Commercial Components** 



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 (818) 701-4939 Fax:

### Features

- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information) Power Dissipation: 0.225W  $(T_{amb}=25^{\circ}C)$ (Note 1) Collector Current: 0.1A

- Epoxy meets UL 94 V-0 flammability rating
- Moisure Sensitivity Level 1
- Halogen free available upon request by adding suffix "-HF"

### Maximum Ratings

- Operating temperature : -55℃ to +150℃
- Storage temperature : -55°C to +150°C

#### **DEVICE MARKING**

BC846A=1A,46A; BC846B=1B,46B; BC847A=1E,47A; BC847B=1F,47B; BC847C=1G,47C; BC848A=1J,48A; BC848B=1K,48B: BC848C=1L,48C BC849B=49B; BC849C=49C;

#### Electrical Characteristics @ $25^{\circ}$ C Unless Otherwise Specified

Min

Max

Units

Parameter


ULL	CHARA	<b>CTER</b>	PULTO
ULL	<b>UNANA</b>	IL I EN	191169


Symbol


UFF GRANA	GIERISTIGS			
V <sub>(BR)CBO</sub>	Collector-Base Breakdown Voltage (I <sub>C</sub> =10µAdc, I <sub>E</sub> =0)			Vdc
	BC846		80	
	BC847		50	
	BC848, BC849		30	
V <sub>(BR)CEO</sub>	Collector-Emitter Breakdown Voltage			Vdc
. ,	$(I_{C}=10 \text{mAdc}, I_{B}=0)$			
	BC846		65	
	BC847		45	
	BC848,BC849		30	
V <sub>(BR)EBO</sub>	Collector-Emitter Breakdown Voltage			Vdc
	(I <sub>E</sub> =10µAdc, I <sub>C</sub> =0)		6	
I <sub>CBO</sub>	Collector Cut-off Current		0.1	µAdc
	BC846 (V <sub>CB</sub> =80V, I <sub>E</sub> =0)			
	BC847 (V <sub>CB</sub> =50V, I <sub>E</sub> =0)			
	BC848, BC849 (V <sub>CB</sub> =30V, I <sub>E</sub> =0)			
ICEO	Collector Cut-off Current		0.1	µAdc
	BC846 ( $V_{CE}$ =60V, $I_{B}$ =0)			
	BC847 (V <sub>CE</sub> =45V, I <sub>B</sub> =0)			
	BC848, BC849 (V <sub>CE</sub> =30V, I <sub>B</sub> =0)			
I <sub>EBO</sub>	Emitter Cut-off Current		0.1	µAdc
	(V <sub>EB</sub> =5V, I <sub>C</sub> =0mA)			
H <sub>FE(1)</sub>	DC Current Gain( $V_{CE}=5V$ , $I_C=2mA$ )			
	BC846A, 847A, 848A	110	220	
	BC846B, 847B, 848B,849B	200	450	
	BC847C, BC848C ,BC849C	420	800	
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage		0.5	Vdc
	(I <sub>C</sub> =100mA, I <sub>B</sub> =5mA)			
V <sub>BE(sat)</sub>	Base-Emitter Saturation Voltage		1.1	Vdc
	(I <sub>C</sub> =100mA, I <sub>B</sub> =5mA)			
f⊤	Transition Frequency	100		MHz
	(V <sub>CE</sub> =5V, I <sub>C</sub> =10mA, f=100MHz)			


### **BC846A THRU BC849C**

## NPN **Plastic-Encapsulate Transistors**

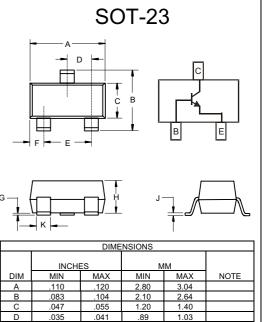







Note 1: Transistor mounted on an FR4 printed-circuit board

www.mccsemi.com

## BC846A thru BC849C

COLLECTOR CURRENT Ic (mA)

BASE-EMITTER SATURATION VOLTAGE V<sub>BEsst</sub> (mV)

(mA)

COLLECTOR CURRENT Ic




Static Characteristic h. 10 3000 COMMON COMMON EMITTER EMITTER V<sub>CE</sub>= 5V T\_=25℃ 1000 00 h<sub>FE</sub> 20uÅ . 18uÅ DC CURRENT GAIN 16uA т =25°C . 14uA . 12uA 100 10uÁ 8uA 6uA 4uA <sub>B</sub>=2uA 10 5 V<sub>CE</sub> (V) 3 6 10 COLLECTOR CURRENT 100 (mA) COLLECTOR-EMITTER VOLTAGE I<sub>c</sub> V\_BEsat I<sub>ç</sub> V I<sub>c</sub> 1000 500 β=20 β=20 COLLECTOR-EMITTER SATURATION VOLTAGE V<sub>CEsst</sub> (mV) 800 T<sub>a</sub>=25℃ T\_=100 ℃ 600 T =25°C T\_=100 400 10 ∟ 0.1 200 L 0.1 10 100 10 100 COLLECTOR CURRENT I COLLECTOR CURREMT I (mA) (mA)  $V_{_{\rm BE}}$ I<sub>c</sub> I, 100 500 COMMON EMITTER V<sub>cF</sub>=5V (MHz) TRANSITION FREQUENCY  $f_{_{\rm T}}$ 10 100 100 25 COMMON EMITTER V<sub>ce</sub>=5V T =25℃ 0.1 L 0.2 10 L 0.25 1.0 0.6 0.8 0.4 2 4 6 COLLECTOR CURRENT 8 10 12 BASE-EMMITER VOLTAGE V<sub>BE</sub> (V) I<sub>c</sub> (mA)

## www.mccsemi.com

2 of 4



# BC846A thru BC849C

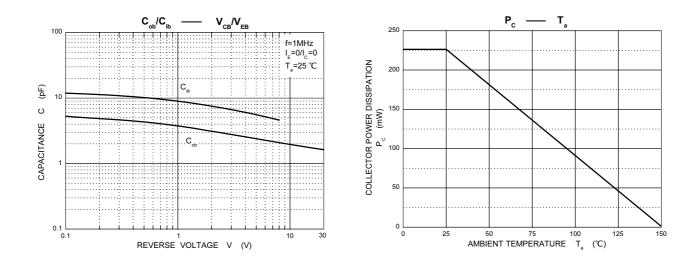

# www.mccsemi.com



### **Ordering Information :**

Device	Packing	
Part Number-TP	Tape&Reel 3Kpcs/Reel	

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

#### **\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

### www.mccsemi.com