
Axial Fan



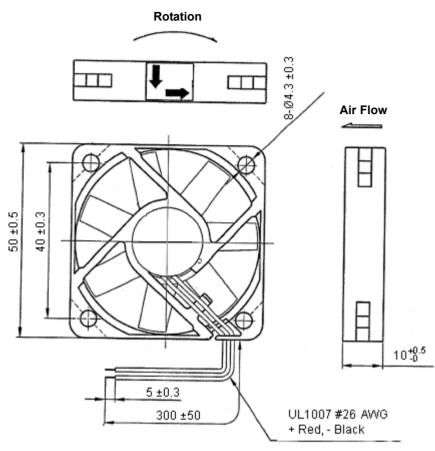

UL File Number : E175395

Dimensions : Millimetres

: Counter - clockwise viewed from front of fan blade

Specifications:

Mechanical Characteristic

Motor Design Bearing System Speed Dimensions Material of Frame Material of Fan Blade Direction of Rotation Mounting Holes Weight

Electrical Characteristic

Rated Voltage Rated Current Rated Power Consumption Operating Voltage Range Starting Voltage Operating Temperature Range Storage Temperature Range

www.element14.com www.farnell.com www.newark.com : 20 g : 12 V dc : 120 mA / maximum 138 mA : 1.44 watts / maximum 1.66 watts : 4.5 to 13.8 V dc

: 2 phases, 4-poles brushless dc motor

: Lubricated sleeve bearing system

: Thermoplastic PBT of UL 94V-0

: Thermoplastic PBT of UL 94V-0

: Diameter 4.3 mm in 8 holes

- : 4.5 V dc (25°C power on / off) : -10°C to +70°C
- : -40°C to +70°C

: Medium

: See diagram

multicomp




Performance Characteristic

| Rated Speed Air Flow Static Pressure | : 4,300 RPM ±15% at rated voltage : 11 CFM : 0.11 inch-H ₂ O |
|--|---|
| Acoustic Noise Air Flow vs Pressure Insulation Class | : 26 dB (A) : See performance curve : UL class A |
| Insulation Resistance Plastic Housing Dielectric Strength | : 500 M Ω at 500 V dc between internal stator and lead wire (+) : Applied 500 V ac for one minute or 600 V ac for 2 seconds between housing and lead |
| Life Expectancy | wire (+) : 35,000 hours at 40°C, 65% humidity, 90% CL |
| Protection | : 🔲 Automatic Restart |
| | Note : In a situation where the fan is locked by an external force while the electricity is on, an increase in coil temperature will be prevented by temporarily turning off the electrical power to the motor. The fan will automatically restart when the locked rotor condition is released |
| Protection | Delarity Protection |

Performance Curve

Static Pressure

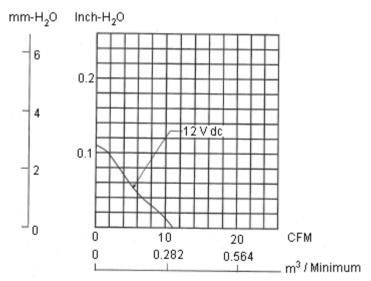

Part Number Table

| Description | Part Number |
|-------------|-------------|
| Axial Fan | MC36261 |

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Famell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

