

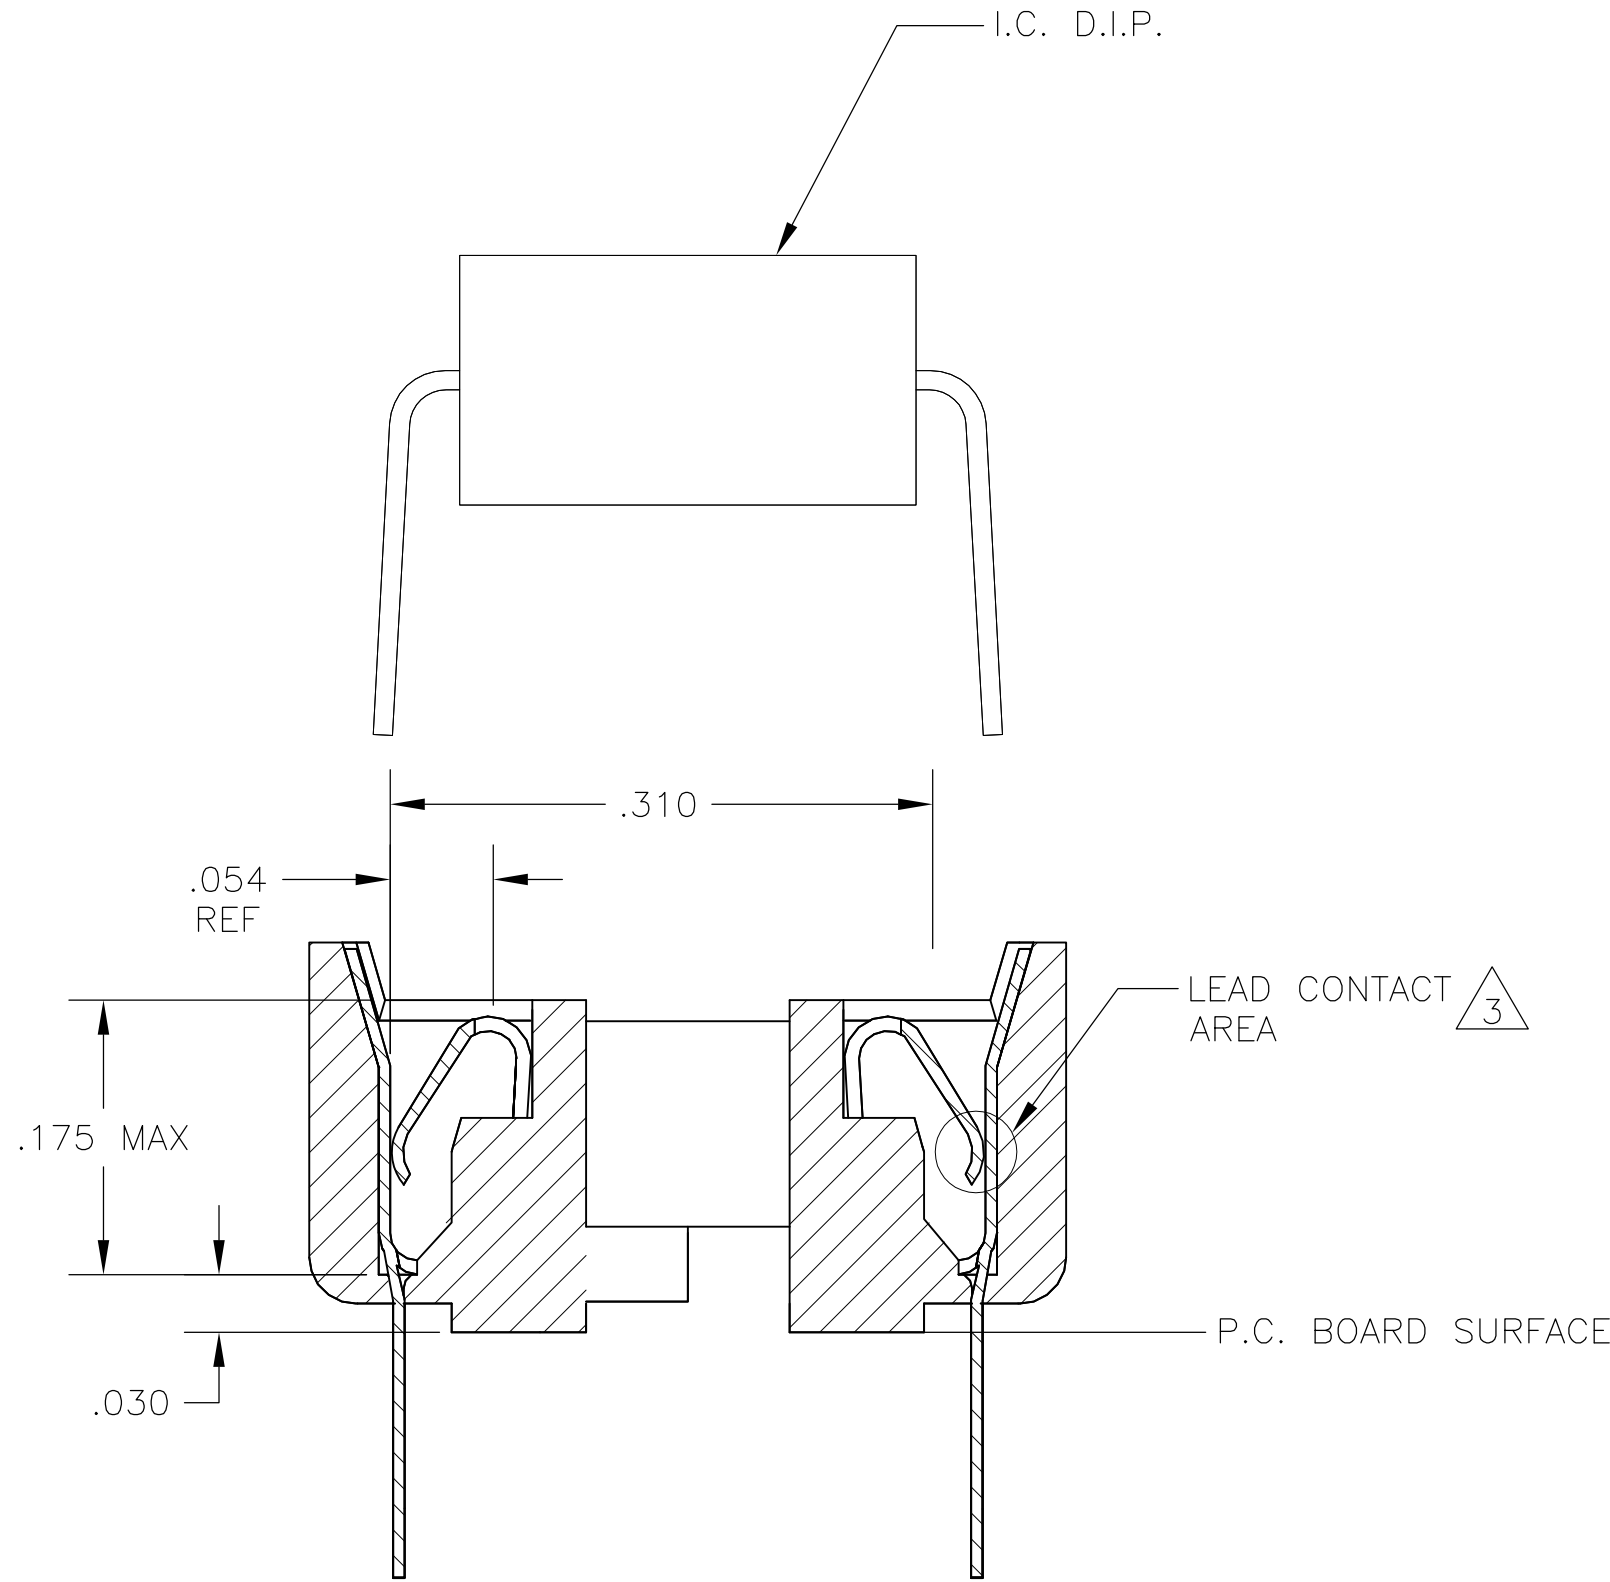
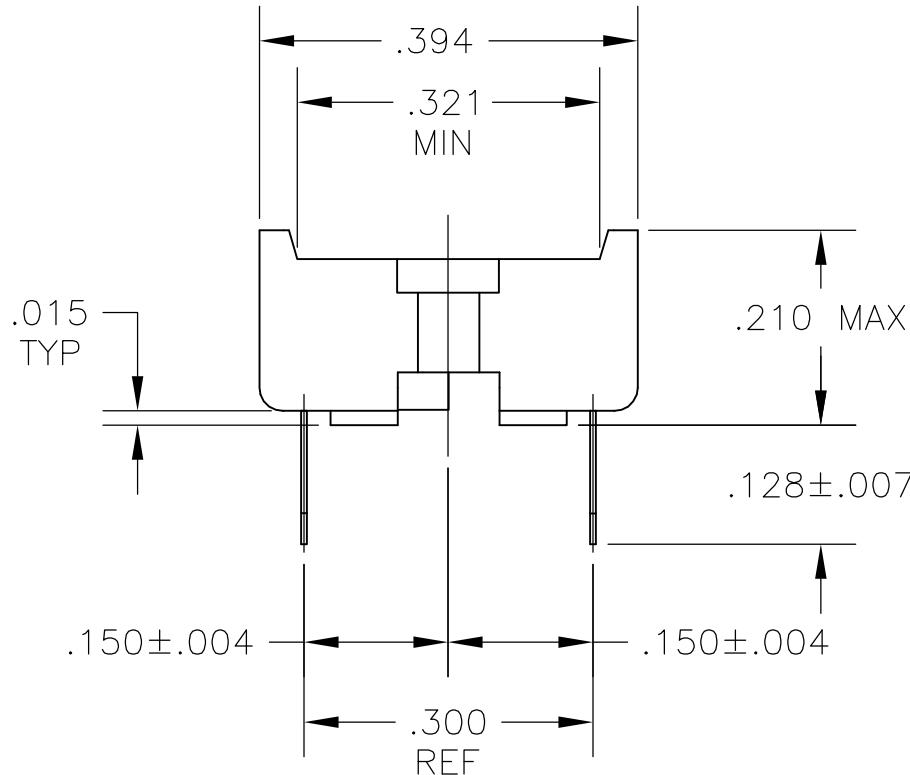
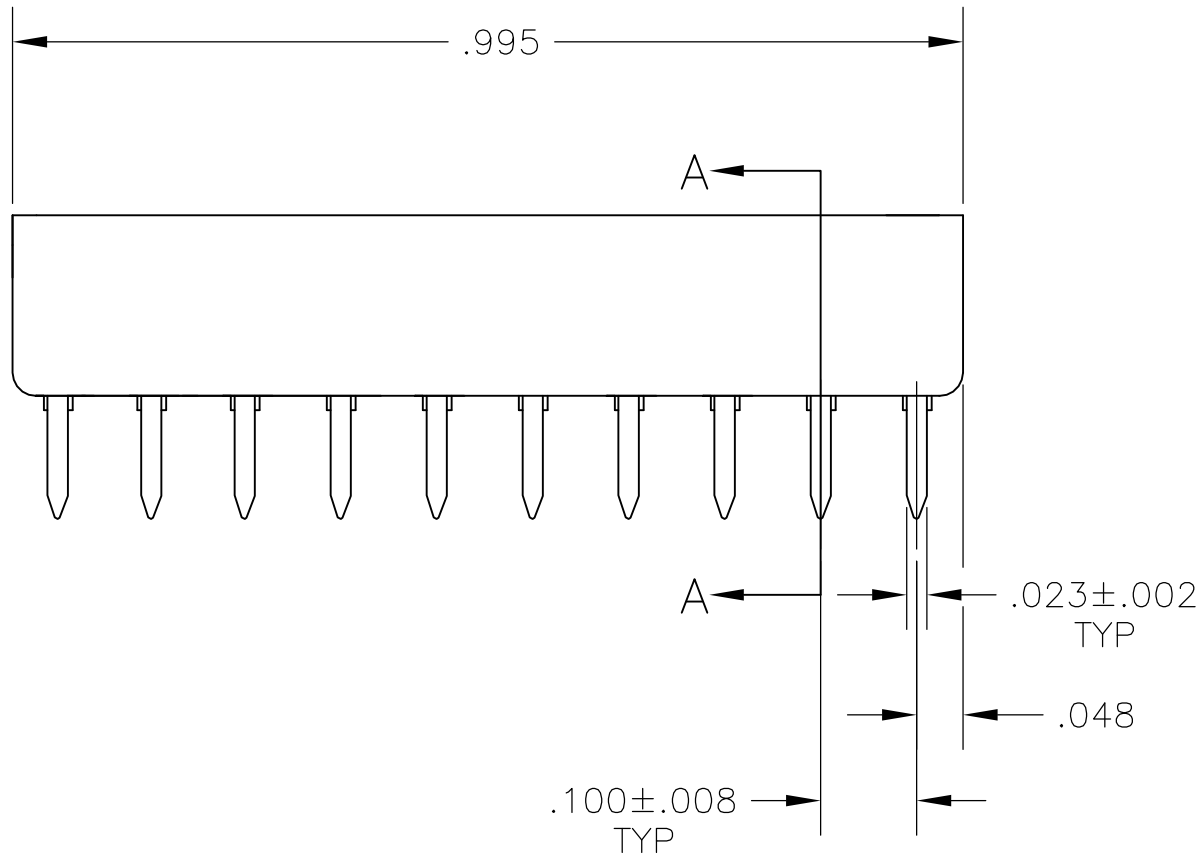


1. RECEPTACLE ACCEPTS A .008—.014 THICK I.C. LEAD.
2. TUBE LOADED.
- 3

 TWO .000015 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN-LEAD (93/7) ON SOLDER LEGS, BALANCE OF CONTACT NICKEL PLATED.

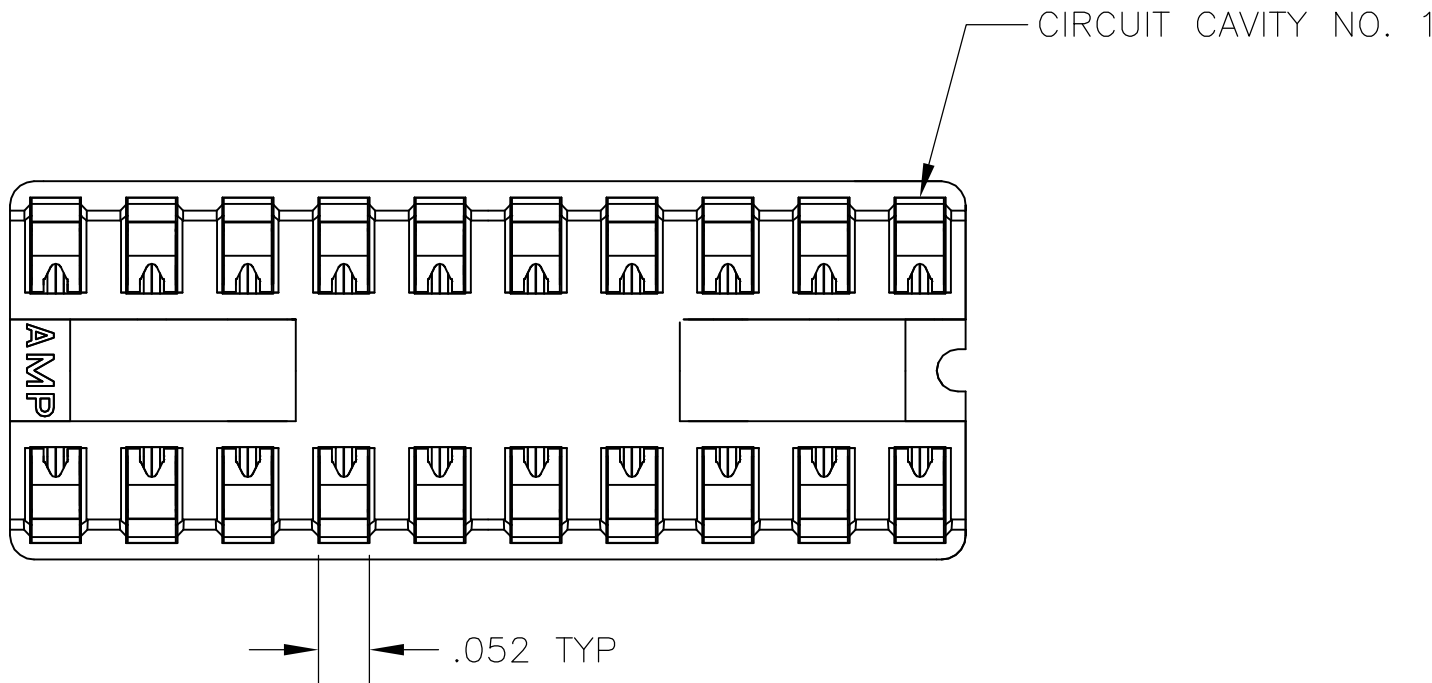

SECTION A-A
SCALE 10:1

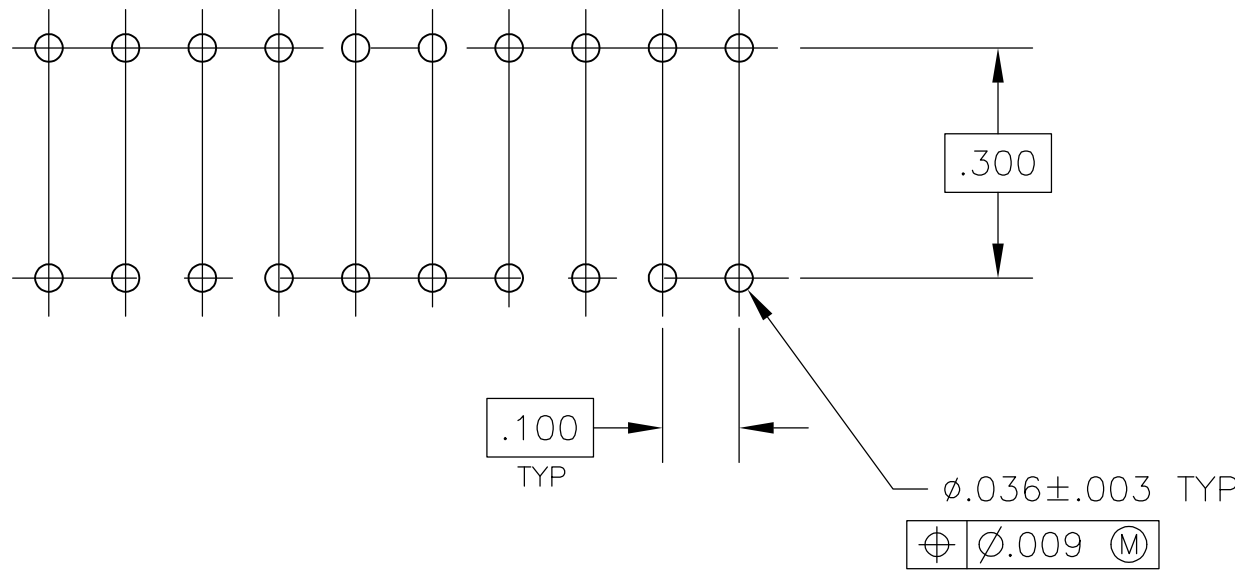

RECOMMENDED MOUNTING HOLE PATTERN
SCALE 4:1

OBSOLETE

OBSOLETE

3 TINNED	PHOS. BRZ	BROWN GLASS-FILLED PCT	2-382465-4
	PHOS. BRZ	BLACK THERMO PLASTIC	2-382465-3
TINNED	BE.CU.	BROWN GLASS-FILLED PCT	2-382465-1
CONTACT FINISH	CONTACT MAT'L	HOUSING MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.SALMON CHK R.MILLER APVD R.PRIDDY	06MAR90	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME	SOCKET ASSY, DIP, HT, 20 POS, DIPLOMATE DL	
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -	108-1066	SIZE	CAGE CODE	DRAWING NO
MATERIAL SEE TABLE	FINISH SEE TABLE	114-1052	RESTRICTED TO	A100779C=382465	
CUSTOMER DRAWING		SCALE	5:1	SHEET	1 OF 1
		REV	G1		