


PCB Terminal Strips, Series 236, Pin Spacings 5/5.08 mm/0.2 in; 7.5/7.62 mm / 0.3 in; 10/10.16 mm / 0.4 in


Front-/Side-entry

CAGE CLAMP®



2
21

Pin spacing 5/5.08 mm / 0.2 in 0.08 – 2.5 mm ² AWG 28 – 12 250 V/4 kV/3, 16 A 300 V, 15 A 500 V/4 kV/2, 16 A 300 V, 15 A 5 – 6 mm / 0.22 in *	Pin spacing 7.5/7.62 mm / 0.3 in 0.08 – 2.5 mm ² AWG 28 – 12 400 V/6 kV/3, 16 A 300 V, 15 A 800 V/6 kV/2, 16 A 300 V, 15 A 5 – 6 mm / 0.22 in *	Pin spacing 10/10.16 mm / 0.4 in 0.08 – 2.5 mm ² AWG 28 – 12 500 V/6 kV/3, 16 A 300 V, 15 A 1000 V/6 kV/2, 16 A 300 V, 15 A 5 – 6 mm / 0.22 in *
--	--	---

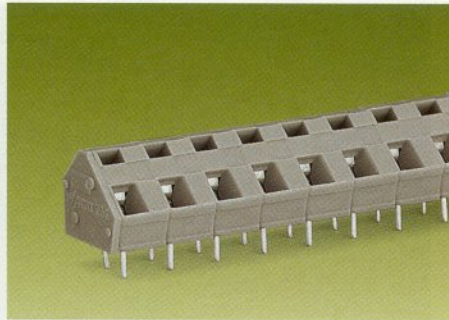

No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
Terminal strips, grey, standard lengths, 1 solder pin/pole, rear ①			Terminal strips, grey, standard lengths, 1 solder pin/pole, rear ①			Terminal strips, grey, standard lengths, 1 solder pin/pole, rear ①		
2	236-102	420 (4 x 105)	2	236-202	280 (4 x 70)	2	236-302	200 (4 x 50)
3	236-103	280 (4 x 70)	3	236-203	200 (4 x 50)	3	236-303	140 (4 x 35)
4	236-104	220 (4 x 55)	4	236-204	140 (4 x 35)	4	236-304	100 (4 x 25)
6	236-106	140 (4 x 35)	6	236-206	100 (4 x 25)	6	236-306	80 (4 x 20)
8	236-108	100 (4 x 25)	8	236-208	80 (4 x 20)	8	236-308	60 (4 x 15)
12	236-112	80 (4 x 20)	12	236-212	40 (4 x 10)	12	236-312	40 (4 x 10)
16	236-116	60 (4 x 15)	16	236-216	40 (4 x 10)	16	236-316	20 (4 x 5)
24	236-124	40 (4 x 10)	24	236-224	20 (4 x 5)	24	236-324	20 (4 x 5)
36	236-136	20 (4 x 5)						
48	236-148	20 (4 x 5)						
2 solder pins/pole			2 solder pins/pole			2 solder pins/pole		
2	236-402	420 (4 x 105)	2	236-502	280 (4 x 70)	2	236-602	200 (4 x 50)
3	236-403	280 (4 x 70)	3	236-503	200 (4 x 50)	3	236-603	140 (4 x 35)
4	236-404	220 (4 x 55)	4	236-504	140 (4 x 35)	4	236-604	100 (4 x 25)
6	236-406	140 (4 x 35)	6	236-506	100 (4 x 25)	6	236-606	80 (4 x 20)
8	236-408	100 (4 x 25)	8	236-508	80 (4 x 20)	8	236-608	60 (4 x 15)
12	236-412	80 (4 x 20)	12	236-512	40 (4 x 10)	12	236-612	40 (4 x 10)
16	236-416	60 (4 x 15)	16	236-516	40 (4 x 10)	16	236-616	20 (4 x 5)
24	236-424	40 (4 x 10)	24	236-524	20 (4 x 5)	24	236-624	20 (4 x 5)
36	236-436	20 (4 x 5)						
48	236-448	20 (4 x 5)						

For assemblies in other lengths and colors, please contact factory.



Additional item-Nos. for colored terminal strips	Ordering examples
blue .../000-006 ①	Terminal strip, pin spacing 5/5.08 mm/0.2 in,
dark grey .../000-008	2 solder pins/pole, 8-pole,
light grey .../000-009	orange: 236-408/000-012
orange .../000-012	Terminal strip, pin spacing 7.5/7.62 mm/0.3 in,
light green .../000-017	2 solder pins/pole, 12-pole, w. solder pins 5.5 mm/0.217 in
Additional item-No. for colored terminal strips with	blue: 236-512/332-006
2 solder pins/pole and solder pins 5.5 mm/0.217 in	① With blue insulating housings suitable f. EEx i applic.
.../332-...	(only pin spacings 7.5/7.62 mm and 10/10.16 mm)

Dimensions (in mm) (Adjustment of pin spacing is made by pulling on the end blocks so that they expand to satisfy the hole centers required.)

