




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1959	B	Shell Plate was Zinc	JN	2/14/08	JN	2/14/08	JN	2/14/08
2081	C	Description Updated	JN	11/09/09	JN	11/09/09	JN	11/09/09

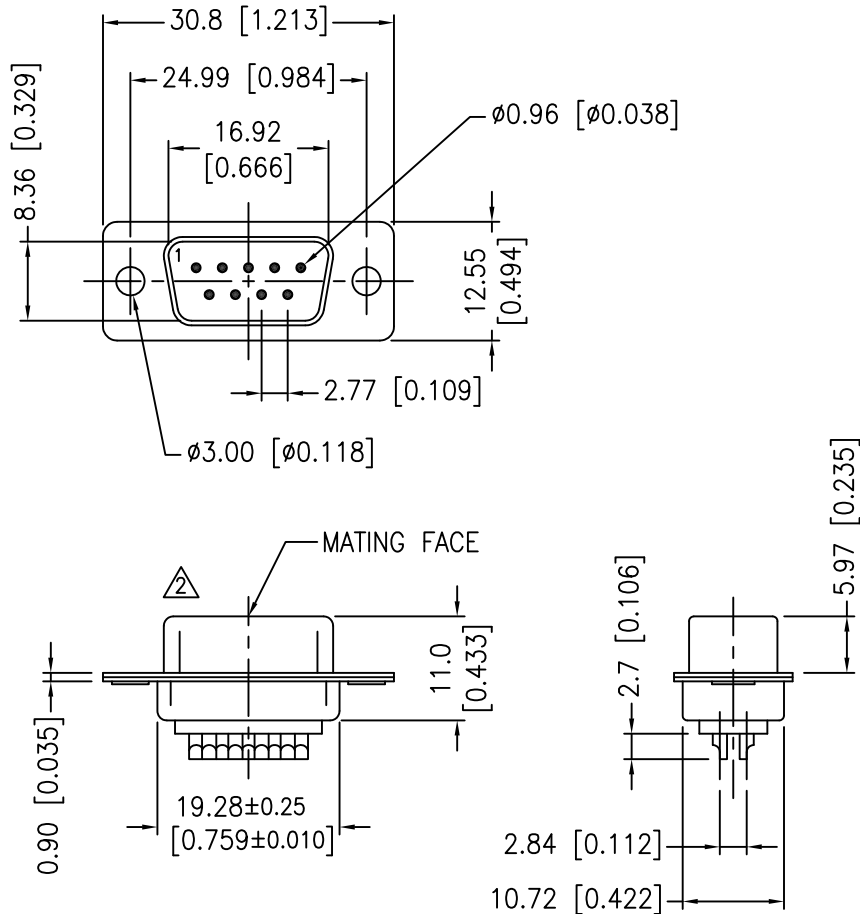

SPECIFICATION:

- 1. Shell: Steel, Tin-Plated
- 2. Contact: Brass, 5 Micro Inch Gold-Plated over Nickel
- 3. Insulator: PBT & Glass-Fibre Reinforced
- 4. Current Rating: 5 Amps
- 5. Dielectric Strength: 1000V for One Minute
- 6. Insulator Resistance: 1000M Ω Min. at 500V DC
- 7. Temperature: -50°C to +105°C

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Dan McVicker	12/5/06
CHECKED BY:	DATE:
Jason Nash	2/14/08
APPROVED BY:	DATE:
Jason Nash	2/14/08

DRAWING TITLE: D-Sub Male, 9 pin, Solder Cup			
SIZE A	DWG. NO. SPC15469	ELECTRONIC FILE 79K5043.dwg	REV C
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1	