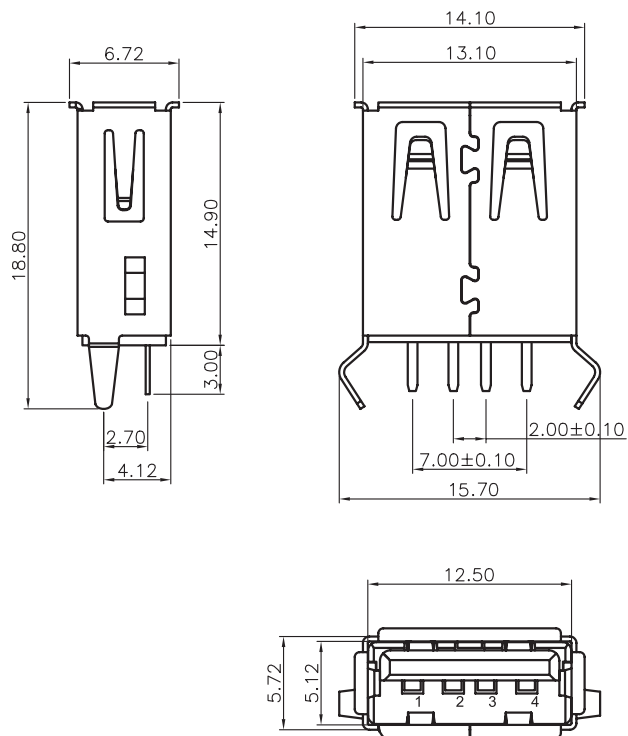


TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PBT
FLAMMABILITY RATING: UL94-V0
COLOR: WHITE
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: BRASS Ni PLATED
QUALITY CLASS: 1500 MATING CYCLES

ENVIRONMENTAL
OPERATING TEMPERATURE: -40°C UP TO +105°C
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
CURRENT RATING: 1.5 A MAX
WORKING VOLTAGE: 30 VAC
INSULATOR RESISTANCE: >1000 MΩ
DIELECTRIC WITHSTANDING VOLTAGE: 750 VAC/MIN
CONTACT RESISTANCE: 20 mΩ MAX

STANDARD
UL CERTIFIED: E323964

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING





PACKAGING
TRAY

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK				
P	09-AVR-15	PCB THICKNESS	QP			APPROVAL: NPr	UNIT: MM	DESCRIPTION: USB 2.0 TYPE A VERTICAL		SIZE
L	27-OCT-14	REVIEW	QL				SCALE:			
K	12-AUG-13	UPDATE	QL				SHEET: 1/2	WERI PART NO: 614 004 135 023		
J	15-FEB-13	DESIGNATION	AR	DRAW: QL						
I	19-DEC-11	DRAWING	GG					A4		
H	08-NOV-11	CURRENT RATING	GG							
REV	DATE	FILE	BY							

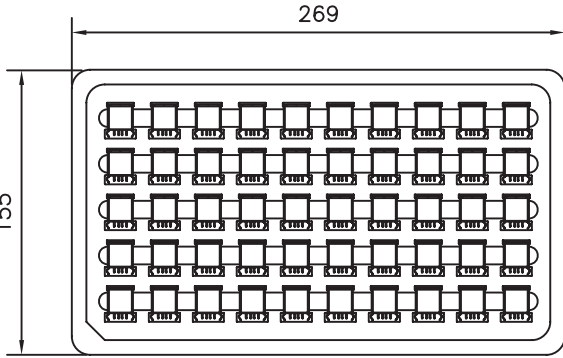


269

155




Note:
1.Dimension:
Tray Size: 269(L)X155(W)X8.0(H) (mm)
Carton Size:322X285X350(mm)

Pin.	Pcs/Tray	Tray/Carton	Pcs/Carton
04	50	70	3500



84 Trays

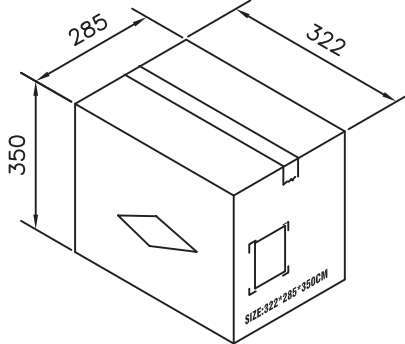

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15	 WÜRTH ELEKTRONIK	
G							
F							
E							
D				APPROVAL: NPr	UNIT: MM SCALE: SHEET: 2/3 DRAW: QL	DESCRIPTION: USB TYPE A VERTICAL WERI PART NO: 614 004 135 023	
C							
B							
A							
REV	DATE	FILE	BY			SIZE A4	

