#### Distributed by:



#### 

The content and copyrights of the attached material are the property of its owner.

#### Jameco Part Number 990657



# MM74HCT540, Inverting Octal 3-STATE Buffer MM74HCT541, Octal 3-STATE Buffer

#### Features

- TTL input compatible
- Typical propagation delay: 12ns
- 3-STATE outputs for connection to system buses
- Low quiescent current: 80µA
- Output current: 6mA (Min.)

## **General Description**

The MM74HCT540 and MM74HCT541 3-STATE buffers utilize advanced silicon-gate CMOS technology and are general purpose high speed inverting and non-inverting buffers. They possess high drive current outputs which enable high speed operation even when driving large bus capacitances. These circuits achieve speeds comparable to low power Schottky devices, while retaining the low power consumption of CMOS. Both devices are TTL input compatible and have a fanout of 15 LS-TTL equivalent inputs.

MM74HCT devices are intended to interface between TTL and NMOS components and standard CMOS devices. These parts are also plug-in replacements for LS-TTL devices and can be used to reduce power consumption in existing designs.

The MM74HCT540 is an inverting buffer and the MM74HCT541 is a non-inverting buffer. The 3-STATE control gate operates as a two-input NOR such that if either  $\overline{G1}$  or  $\overline{G2}$  are HIGH, all eight outputs are in the high-impedance state.

In order to enhance PC board layout, the MM74HCT540 and MM74HCT541 offers a pinout having inputs and outputs on opposite sides of the package. All inputs are protected from damage due to static discharge by diodes to  $V_{CC}$  and ground.

### **Ordering Information**


Order Number	Package Number	Package Description
MM74HCT540WM	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide
MM74HCT540SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
MM74HCT540MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide
MM74HCT541WM	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide
MM74HCT541SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
MM74HCT541MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide
MM74HCT541N	N20A	20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering number.

June 2007

## **Connection Diagrams**

Pin Assignments for DIP, SOIC, SOP and TSSOP

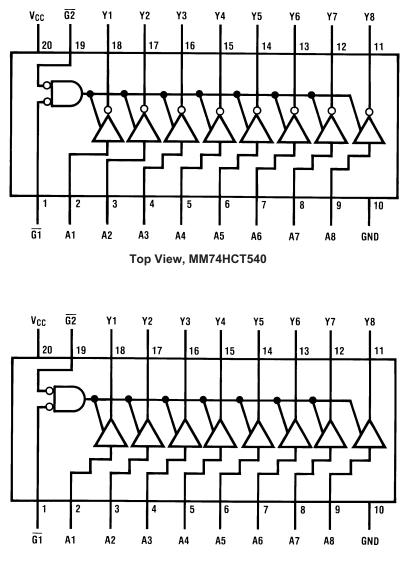

Top View, MM74HCT541

## Absolute Maximum Ratings<sup>(1)</sup>

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Rating
V <sub>CC</sub>	Supply Voltage	-0.5 to +7.0V
V <sub>IN</sub>	DC Input Voltage	–1.5 to V <sub>CC</sub> +1.5V
V <sub>OUT</sub>	DC Output Voltage	–0.5 to V <sub>CC</sub> +0.5V
I <sub>IK</sub> , I <sub>OK</sub>	Clamp Diode Current	±20mA
I <sub>OUT</sub>	DC Output Current, per pin	±35mA
I <sub>CC</sub>	DC V <sub>CC</sub> or GND Current, per pin	±70mA
T <sub>STG</sub>	Storage Temperature Range	–65°C to +150°C
PD	Power Dissipation	
	Note 2	600mW
	S.O. Package only	500mW
TL	Lead Temperature (Soldering 10 seconds)	260°C

Note:

1. Unless otherwise specified all voltages are referenced to ground.

2. Power Dissipation temperature derating - plastic "N" package: -12mW/°C from 65°C to 85°C.

## **Recommended Operating Conditions**

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Min.	Max.	Units
V <sub>CC</sub>	Supply Voltage	4.5	5.5	V
V <sub>IN</sub> , V <sub>OUT</sub>	DC Input or Output Voltage	0	V <sub>CC</sub>	V
T <sub>A</sub>	Operating Temperature Range	-40	+85	°C
t <sub>r</sub> , t <sub>f</sub>	Input Rise and Fall Times		500	ns

## **DC Electrical Characteristics**

 $V_{CC}\,{=}\,5V$   $\pm$  10% (unless otherwise specified)

			T <sub>A</sub>	= 25°C	$\begin{array}{c} T_A = -40 \\ to 85^\circ C \end{array}$	T <sub>A</sub> = -55 to 125°C	
Symbol	Parameter	Conditions	Typ. Gu		ranteed Li	Units	
V <sub>IH</sub>	Minimum HIGH Level Input Voltage			2.0	2.0	2.0	V
V <sub>IL</sub>	Maximum LOW Level Input Voltage			0.8	0.8	0.8	V
V <sub>OH</sub>	Minimum HIGH	$V_{IN} = V_{IH}$ or $V_{IL}$ :					
	Level Output	$ I_{OUT}  = 20\mu A$	$V_{CC}$	V <sub>CC</sub> – 0.1	V <sub>CC</sub> – 0.1	V <sub>CC</sub> – 0.1	V
	Voltage	$ I_{OUT}  = 6.0 \text{mA}, V_{CC} = 4.5 \text{V}$	4.2	3.98	3.84	3.7	
		$ I_{OUT}  = 7.2 \text{mA}, V_{CC} = 5.5 \text{V}$	5.2	4.98	4.84	4.7	
V <sub>OL</sub>	Maximum LOW	$V_{IN} = V_{IH}$ or $V_{IL}$ :					
	Level Voltage	$ I_{OUT}  = 20\mu A$	0	0.1	0.1	0.1	V
		$ I_{OUT}  = 6.0 \text{mA}, V_{CC} = 4.5 \text{V}$	0.2	0.26	0.33	0.4	
		$ I_{OUT}  = 7.2 \text{mA}, V_{CC} = 5.5 \text{V}$	0.2	0.26	0.33	0.4	
I <sub>IN</sub>	Maximum Input Current			±0.1	±1.0	±1.0	μA
I <sub>OZ</sub>	Maximum 3-STATE Output Leakage Current	$V_{OUT} = V_{CC}$ or GND, $\overline{G} = V_{IH}$		±0.5	±5.0	±10	μA
I <sub>CC</sub>	Maximum	$V_{IN} = V_{CC}$ or GND, $I_{OUT} = 0\mu A$		8.0	80	160	μA
	Quiescent Supply Current	$V_{IN} = 2.4V \text{ or } 0.5V^{(3)}$	0.6	1.0	1.3	1.5	mA

#### Note:

3. Measured per input. All other inputs at  $V_{\mbox{CC}}$  or GND.

## AC Electrical Characteristics

MM74HCT540:  $V_{CC} = 5.0V$ ,  $t_r = t_f = 6ns$ ,  $T_A = 25^{\circ}C$ , (unless otherwise specified).

Symbol	Parameter	Conditions	Тур.	Guaranteed Limits	Units
t <sub>PHL</sub> , t <sub>PLH</sub>	Maximum Output Propagation Delay	$C_L = 45 pF$	12	18	ns
t <sub>PZL</sub> , t <sub>PZH</sub>	Maximum Output Enable Time	$C_L = 45 pF, R_L = 1 k\Omega$	14	28	ns
t <sub>PLZ</sub> , t <sub>PHZ</sub>	Maximum Output Disable Time	$C_L = 5 pF, R_L = 1 k\Omega$	13	25	ns

## **AC Electrical Characteristics**

MM74HCT540:  $V_{CC} = 5.0V \pm 10\%$ ,  $t_r = t_f = 6ns$  (unless otherwise specified).

				T <sub>A</sub> =	25°C	$\begin{array}{c} T_A = -40 \\ to \ 85^\circ C \end{array}$	T <sub>A</sub> = -55 to 125°C	
Symbol	Parameter	Conc	litions	Тур.	G	uaranteed	Limits	Units
t <sub>PHL</sub> , t <sub>PLH</sub>	Maximum Output	$C_L = 50 pF$		12	20	25	30	ns
	Propagation Delay	$C_L = 150 pF$		22	30	38	45	
t <sub>PZH</sub> , t <sub>PZL</sub>	Maximum Output Enable	$R_L = 1k\Omega$	$C_L = 50 pF$	15	30	38	45	ns
	Time		C <sub>L</sub> = 150pF	20	40	50	60	
t <sub>PHZ</sub> , t <sub>PLZ</sub>	Maximum Output Disable Time	$R_L = 1k\Omega, C$	<sub>L</sub> = 50pF	15	30	38	45	ns
t <sub>THL</sub> , t <sub>TLH</sub>	Maximum Output Rise and Fall Time	$C_L = 50 pF$		6	12	15	18	ns
C <sub>IN</sub>	Maximum Input Capacitance			5	10	10	10	pF
C <sub>OUT</sub>	Maximum Output Capacitance			15	20	20	20	pF
C <sub>PD</sub>	Power Dissipation	(per output)	$\overline{G} = V_{CC}$	12				pF
	Capacitance <sup>(4)</sup>		$\overline{G} = GND$	50				

Note:

4. C<sub>PD</sub> determines the no load dynamic power consumption,  $P_D = C_{PD} V_{CC} 2 f + I_{CC} V_{CC}$ , and the no load dynamic current consumption,  $I_S = C_{PD} V_{CC} f + I_{CC}$ .

## **AC Electrical Characteristics**

MM74HCT541:  $V_{CC}$  = 5.0V,  $t_r$  =  $t_f$  = 6ns,  $T_A$  = 25°C, (unless otherwise specified).

Symbol	Parameter	Conditions	Тур.	Guaranteed Limits	Units
t <sub>PHL</sub> , t <sub>PLH</sub>	Maximum Output Propagation Delay	$C_L = 45 pF$	13	20	ns
t <sub>PZL</sub> , t <sub>PZH</sub>	Maximum Output Enable Time	$C_L = 45 pF, R_L = 1 k\Omega$	17	28	ns
t <sub>PLZ</sub> , t <sub>PHZ</sub>	Maximum Output Disable Time	$C_L = 5pF, R_L = 1k\Omega$	15	25	ns


### **AC Electrical Characteristics**

MM74HCT541:  $V_{CC} = 5.0V \pm 10\%$ ,  $t_r = t_f = 6ns$  (unless otherwise specified).

				T <sub>A</sub> =	25°C	T <sub>A</sub> =40 to 85°C	T <sub>A</sub> = -55 to 125°C	
Symbol	Parameter	Cond	litions	Тур.	G	uaranteed	Limits	Units
t <sub>PHL</sub> , t <sub>PLH</sub>	Maximum Output	$C_L = 50 pF$		14	23	29	34	ns
	Propagation Delay	$C_L = 150 pF$		17	33	42	49	1
t <sub>PZH</sub> , t <sub>PZL</sub>	Maximum Output	$R_L = 1k\Omega$	$C_L = 50 pF$	17	30	38	45	ns
	Enable Time		$C_L = 150 pF$	22	40	50	60	1
t <sub>PHZ</sub> , t <sub>PLZ</sub>	Maximum Output Disable Time	$R_L = 1k\Omega, C_L$	= 50pF	17	30	38	45	ns
t <sub>THL</sub> , t <sub>TLH</sub>	Maximum Output Rise and Fall Time	$C_L = 50 pF$		6	12	15	18	ns
C <sub>IN</sub>	Maximum Input Capacitance			5	10	10	10	pF
C <sub>OUT</sub>	Maximum Output Capacitance			15	20	20	20	pF
C <sub>PD</sub>	Power Dissipation	(per output)	$\overline{G} = V_{CC}$	12				pF
	Capacitance <sup>(5)</sup>		$\overline{G} = GND$	45				

Note:

5. C<sub>PD</sub> determines the no load dynamic power consumption,  $P_D = C_{PD} V_{CC} 2 f + I_{CC} V_{CC}$ , and the no load dynamic current consumption,  $I_S = C_{PD} V_{CC} f + I_{CC}$ .



 $\frac{0.496 - 0.512}{(12.598 - 13.005)}$ 

Ĥ Ĥ

Ę Ł Ĥ

t 5 6

0.050 (1.270) TYP

20 Å 19 18 17 伯 16 15

0.394 - 0.419 (10.008-10.643)

LEAD NO. 1 Ident

 $\frac{0.093 - 0.104}{(2.362 - 2.642)}$ 

¥

Figure 1. 20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide Package Number M20B

4

0.014

(0.356)

8° MAX TYP ALL LEADS

0.016-0.050 (0.406-1.270) TYP ALL LEADS

->

Ĥ Ĥ

₽ 2 Ĥ 14 伯

13 12 11

Ĥ Ĥ Ĥ

ĥ

0.008 (0.203)

ĥ

9 10

Ĥ

30° TYP

0.010 MAX (0.254)

<u>0.004 - 0.012</u> (0.102 - 0.305)

SEATING PLANE

M20B (REV F)

0.014-0.020 TYP

(0.356-0.508)

#### ©1984 Fairchild Semiconductor Corporation Rev. 1.3

**Physical Dimensions** 

 $\frac{0.010 - 0.029}{(0.254 - 0.737)}$ 

0.009-0.013

(0.229-0.330) TYP ALL LEADS


×45


Dimensions are in inches (millimeters) unless otherwise noted.


<u>0.291 - 0.299</u> (7.391 - 7.595)

0.004

(0.102) ALL LEAD TIPS

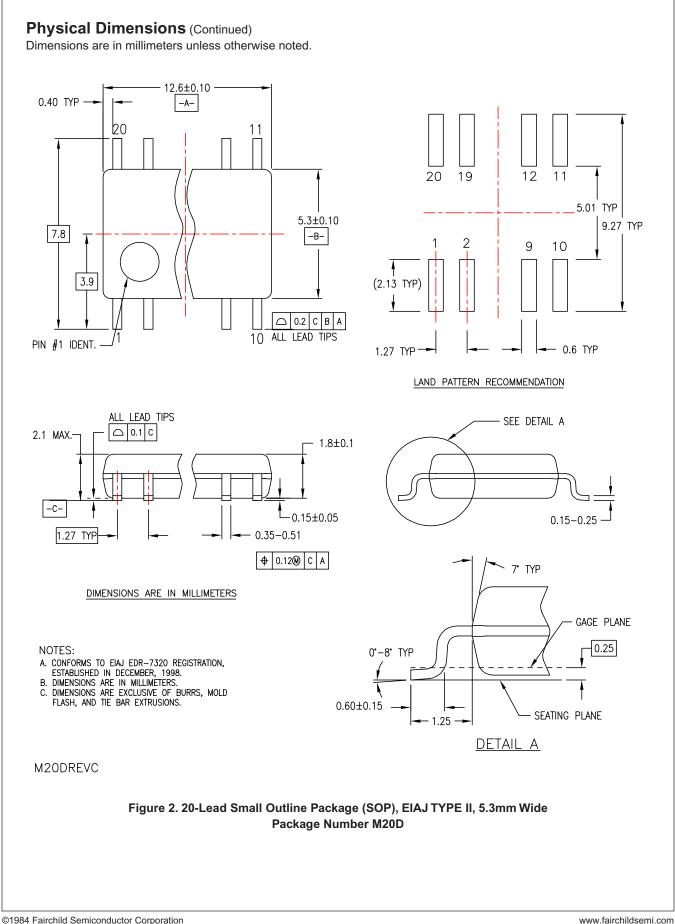

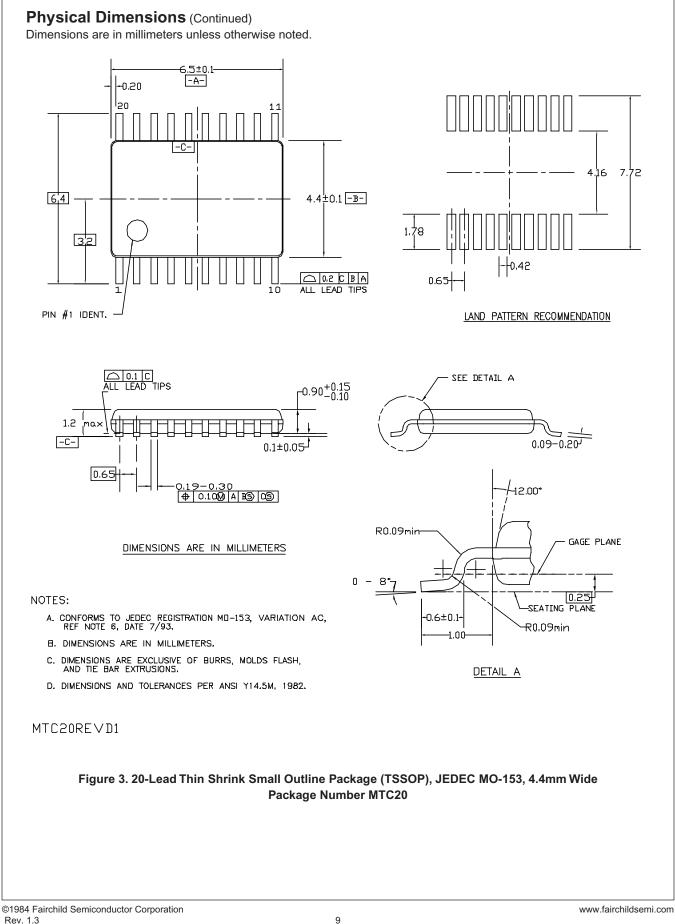

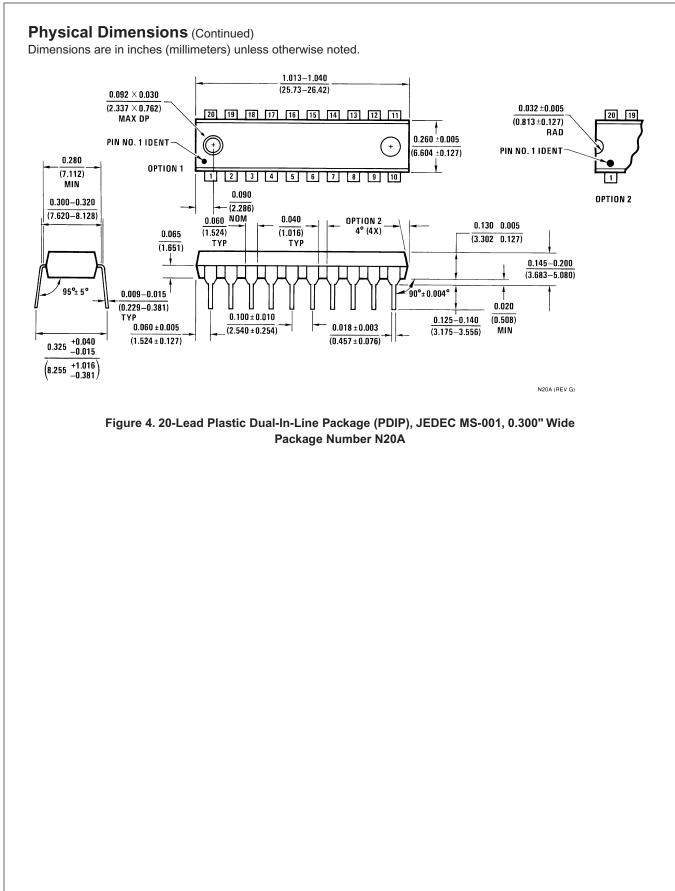



SEMICONDUCTOR

MM74HCT540, Inverting Octal 3-STATE Buffer MM74HCT541, Octal 3-STATE Buffer

#### TRADEMARKS

The following are registered and unregistered trademarks and service marks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks

ACEx <sup>®</sup> Build it Now <sup>™</sup> CorePLUS <sup>™</sup> <i>CROSSVOLT</i> <sup>™</sup> CTL <sup>™</sup> Current Transfer Logic <sup>™</sup> EcoSPARK <sup>®</sup> FACT Quiet Series <sup>™</sup> FACT <sup>®</sup> FAST <sup>®</sup> FastvCore <sup>™</sup> FPS <sup>™</sup> FRFET <sup>®</sup> Global Power Resource <sup>SM</sup> Green FPS <sup>™</sup>	Green FPS <sup>™</sup> e-Series <sup>™</sup> GTO <sup>™</sup> <i>i-Lo</i> <sup>™</sup> IntelliMAX <sup>™</sup> ISOPLANAR <sup>™</sup> MegaBuck <sup>™</sup> MICROCOUPLER <sup>™</sup> MicroPak <sup>™</sup> Motion-SPM <sup>™</sup> OPTOLOGIC <sup>®</sup> OPTOPLANAR <sup>®</sup> PDP-SPM <sup>™</sup> Power220 <sup>®</sup> Power247 <sup>®</sup> POWEREDGE <sup>®</sup>	Power-SPM <sup>™</sup> PowerTrench <sup>®</sup> Programmable Active Droop <sup>™</sup> QFET <sup>®</sup> QS <sup>™</sup> QT Optoelectronics <sup>™</sup> Quiet Series <sup>™</sup> RapidConfigure <sup>™</sup> SMART START <sup>™</sup> SMART START <sup>™</sup> SPM <sup>®</sup> STEALTH <sup>™</sup> SuperFET <sup>™</sup> SuperFET <sup>™</sup> SuperSOT <sup>™</sup> -6 SuperSOT <sup>™</sup> -8	SyncFET <sup>TM</sup> The Power Franchise <sup>®</sup> T <sup>M</sup> TinyBoost <sup>TM</sup> TinyBuck <sup>TM</sup> TinyLogic <sup>®</sup> TINYOPTO <sup>TM</sup> TinyPower <sup>TM</sup> TinyPWM <sup>TM</sup> TinyWire <sup>TM</sup> $\mu$ SerDes <sup>TM</sup> UHC <sup>®</sup> UniFET <sup>TM</sup> VCX <sup>TM</sup>
---	--	---	---

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### **PRODUCT STATUS DEFINITIONS Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information Formative or In Design		This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary First Production		This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

Rev. 128