

CGA3E2X7R1H222K080AD

TDK Item Description : CGA3E2X7R1H222KT***B



Equivalent C1608X7R1H222K for Automotive

Application & Main Feature

Automotive Grade (Conductive Epoxy Application)

Series

CGA3(1608) [EIA CC0603]



Dimensions

L 1.60mm +/-0.15mm
 W 0.80mm +/-0.15mm
 T 0.80mm +/-0.15mm
 B 0.20mm Min.
 G 0.30mm Min.

Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

Rated Voltage

1H (50Vdc)

Capacitance

2.2nF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor

3% Max.


Insulation Resistance

10Gohm Min.


AEC-Q200

Yes


|Z|, ESR vs. Freq. Characteristics

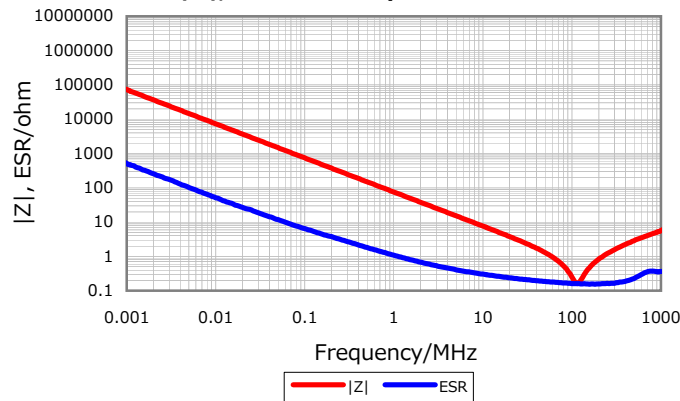


Cap. vs. Freq. Characteristic

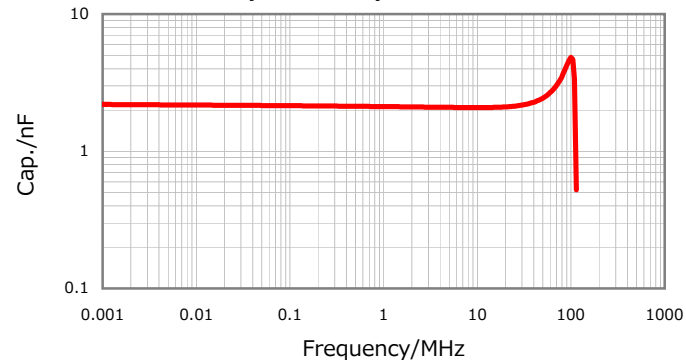


DC Bias Characteristic

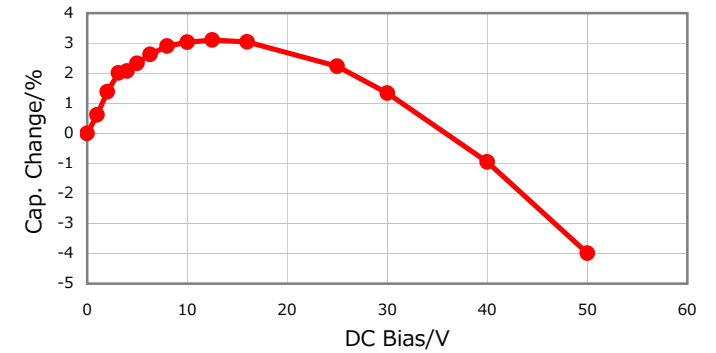

Temperature Characteristic

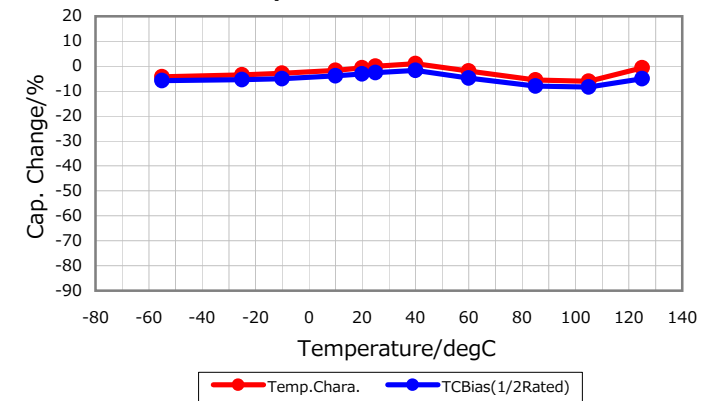

Ripple Temperature Rise Characteristic

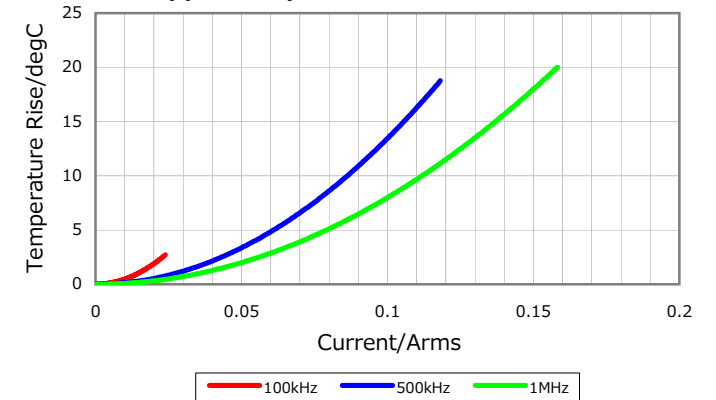

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.

September 28, 2013

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK:

[CGA3E2X7R1H222K080AD](#)