



SOT23 SILICON PLANAR LOW LEAKAGE COMMON ANODE DIODE PAIR

FLLD263

ISSUE 2 – JANUARY 1996

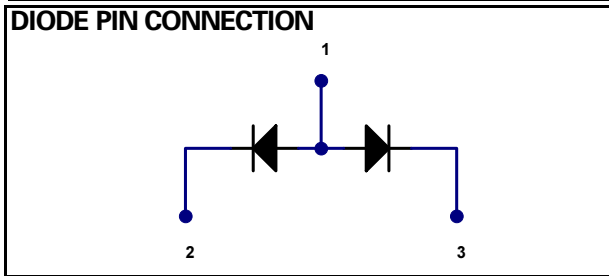

PART MARKING DETAIL – D63

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Repetitive Peak Reverse Voltage	V_{RRM}	100	V
Average Rectified Forward Current	$I_{F(AV)}$	250	mA
Non-Repetitive Peak Forward Current ($t=1\mu s$)	I_{FSM}	3.0	A
Power Dissipation at $T_{amb} = 25^{\circ}C$	P_{tot}	330	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^{\circ}C$


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Reverse Current	I_R		5 5	nA μA	$V_{RRM}=100V$ $V_{RRM}=100V, T_{amb}=150^{\circ}C$
Reverse Recovery Time*	t_{rr}		400	ns	$I_F = I_R = 50 - 400mA$
Forward Recovery Time	t_{fr}		10	ns	$I_F = 10mA$
Diode Capacitance	C_d		4	pF	$V_R = 1V, f = 1MHz$
Forward Overshoot Voltage	V_{fr}		Typ 0.9	V	$I_F = 10mA,$ Rise time = $5ns \pm 20\%$
Forward Voltage	V_F		1.4	V	$I_F = -200mA$

*Time for I_R to recover to 10% of I_R peak

FLLD258
FLLD261
FLLD263

TYPICAL CHARACTERISTICS

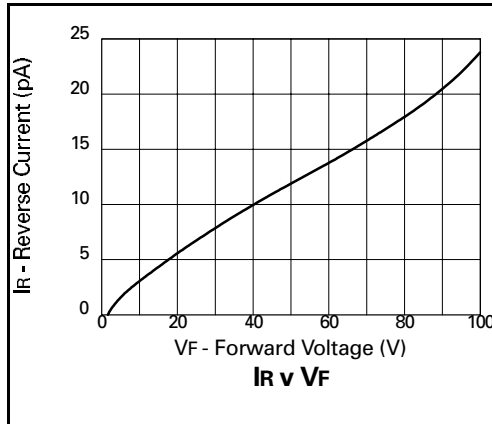

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Diodes Incorporated:](#)

[FLLD263TA](#) [FLLD263TC](#)