



1

2

3

4

5

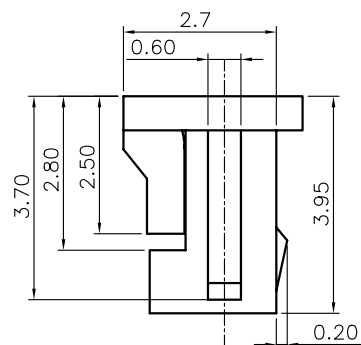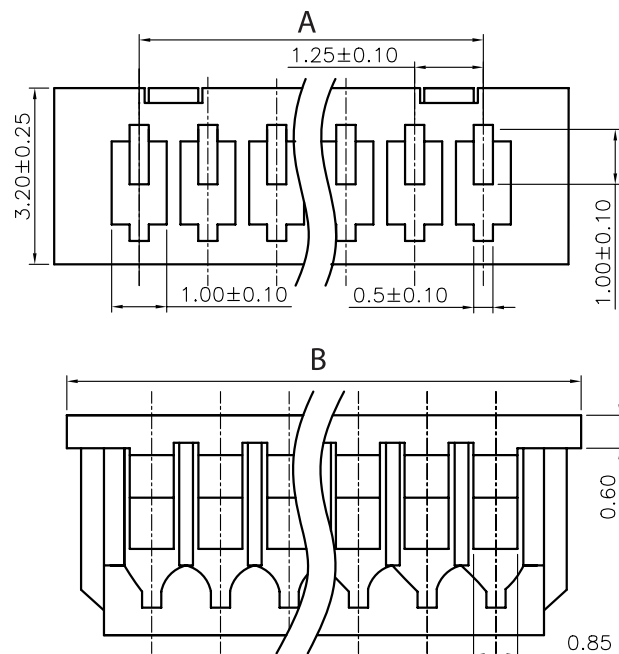

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: NYLON 66
COLOR: WHITE
PITCH: 1.25MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -25 UP TO 85°C
FLAMABILITY RATING: UL94-V0
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1A
WORKING VOLTAGE: 50V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MN

PACKAGING
BAG

DIMENSION
A = 1.25 x (NB. PIN - 1)
B = 1.25 x (NB. PIN + 1) + 0.5

RoHS Compliant

G				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		
F							
E							
D	25-APR-07	UPDATE DRAW	EC				
C	01-FEB-07	DRAW	EC	APPROVAL: RJ	UNIT: MM	DESCRIPTION: 1.25MM FEMALE TERMINAL HOUSING WERI PART NO: 6530 xx 113322	
B	31-MAR-04	LEAD FREE	JP		SCALE:		
A	17-OCT-01	PDF	JP		SHEET: 1/1		
REV	DATE	FILE	BY		DRAW: PEARL		

SIZE

A4